

Product information

DKT presents the only DOCSIS 3.1 capable Service Termination Point ready for installation in DOCSIS 3.0 networks. Euro form factor style Push-in-Outlet is the ideal coax service termination point to ensure fast migration from DOCSIS 3.0 to 3.1 by means of Do-It-Yourself (DIY) upgrade kits. Once the initial Service Termination Point installation is completed by professional installers, future outlet frequency upgrades, required for increased DOCSIS bandwidth, can be done by exchanging the Push-In-Filter supplied in a DIY kit. This kit has to contain a Push-In-Filter and a new face plate. With the current DOCSIS 3.0 return path frequency range of 5-65MHz, the initial installation of Euro PIO 1-4 65 as the Service Termination Point, is the best choice to ensure immediate access to 1300MHz (DOCSIS 3.1), and at the same time serve as platform for future DIY upgrades of the Push-In-Filter. In Push-In-Outlet installations the incoming cable is fitted with a suitable F-connector at once, and the Diplex filter can be exchanged over and over again, without damaging or cutting the incoming cable.

Complete outlet installation kit	Type	Item no.
Euro PIO 1-4 65		52455
Euro Face Plate - White	EFP-DTR	52441
Push-In-Filter	PIF 1-4 65	52410
Euro Frame	EFr	52440
Euro Frame Claws and screws	EFCS	52449
PIO Elastics band	PEB	52448
90 degree Female F	90FF	84040
Euro PIO 1-4 65DVU		52456*
Euro Face Plate - White	EFP-DT	52442
Push-In-Filter	PIF 1-4 65DVU	52415*
Euro Frame	EFr	52440
Euro Frame Claws and screws	EFCS	52449
PIO Elastics band	PEB	52448
90 degree Female F	90FF	84040
Euro PIO 1-4 204		52457
Euro Face Plate - White	EFP-DT	52442
Push-In-Filter	PIF 1-4 204	52412
Euro Frame	EFr	52440
Euro Frame Claws and screws	EFCS	52449
PIO Elastics band	PEB	52448
90 degree Female F	90FF	84040
Euro PIO 1-4 204 2T		52459*
Euro Face Plate - White	EFP-DTT	52444*
Push-In-Filter	PIF 1-4 204 2T	52417*
Euro Frame	EFr	52440
Euro Frame Claws and screws	EFCS	52449
PIO Elastics band	PEB	52448
90 degree Female F	90FF	84040
Euro PIO HNI		52454*
Euro Face Plate - White	EFP-HNI	52443
Push-In-Filter	PIF HNI	52416*
Euro Frame including claws	EFr	52440
Euro Frame Claws and screws	EFCS	52449
PIO Elastics band	PEB	52448
90 degree Female F	90FF	84040
Euro PIO 1-4 85*		52458*
Euro Face Plate - White	EFP-DT	52442
Push-In-Filter	PIF 1-4 85	52411*
Euro Frame	EFr	52440
Euro Frame Claws and screws	EFCS	52449
PIO Elastics band	PEB	52448
90 degree Female F	90FF	84040



push-in-outlets freja



Product information


DKT presents the only DOCSIS 3.1 capable Service Termination Point ready for installation in DOCSIS 3.0 networks. Freja Push-in-Outlet is the ideal coax service termination point to ensure fast migration from DOCSIS 3.0 to 3.1, by means of Do-It-Yourself (DIY) upgrade kits. Once the initial Service Termination Point installation is completed by professional installers, future outlet frequency upgrades, required for increased DOCSIS bandwidth, can be done by exchanging the Push-In-Filter supplied in a DIY kit. This kit has to contain a Push-in-Filter and a new face plate. With the current DOCSIS 3.0 return path frequency range of 5-65MHz, the initial installation of Freja PIO 1-4 65 as the Service Termination Point, is the best choice to ensure immediate access to 1300MHz (DOCSIS 3.1), and at the same time serve as platform for future DIY upgrades of the Push-In-Filter. In Push-In-Outlet installations the incoming cable is fitted with a suitable F-connector at once, and the Duplex filter can be exchanged over and over again, without damaging or cutting the incoming cable.

Complete outlet installation kit	Type	Item no.
Freja PIO 1-4 65		52450
Freja Face Plate - White	FFP-DTR	52431
Push-In-Filter	PIF 1-4 65	52410
Freja Frame including claws	FFr	52430
90 degree Female F	90FF	84040
Freja PIO 1-4 65DVU		52451*
Freja Face Plate - White	FFP-DT	52432
Push-In-Filter	PIF 1-4 65DVU	52415*
Freja Frame including claws	FFr	52430
90 degree Female F	90FF	84040
Freja PIO 1-4 204		52452
Freja Face Plate - White	FFP-DT	52432
Push-In-Filter	PIF 1-4 204	52412
Freja Frame including claws	FFr	52430
90 degree Female F	90FF	84040
Freja PIO 1-4 204 2T		52462*
Freja Face Plate - White	FFP-DTT	52424*
Push-In-Filter	PIF 1-4 204 2T	52417*
Freja Frame including claws	FFr	52430
90 degree Female F	90FF	84040
Freja PIO HNI		52453
Freja Face Plate - White	FFP-HNI	52433
Push-In-Filter	PIF HNI	52416
Freja Frame including claws	FFr	52430
90 degree Female F	90FF	84040



Item numbers marked with * are special order products with MOQ

push-in-outlets Odin

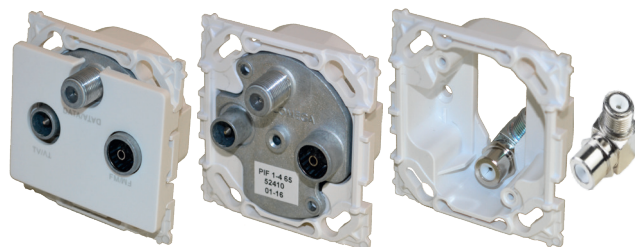

Product information


DKT presents the only DOCSIS 3.1 capable Service Termination Point ready for installation in DOCSIS 3.0 networks. Euro form factor style Push-in-Outlet is the ideal coax service termination point to ensure fast migration from DOCSIS 3.0 to 3.1 by means of Do-It-Yourself (DIY) upgrade kits. Once the initial Service Termination Point installation is completed by professional installers, future outlet frequency upgrades, required for increased DOCSIS bandwidth, can be done by exchanging the Push-In-Filter supplied in a DIY kit. This kit has to contain a Push-in-Filter and a new face plate. With the current DOCSIS 3.0 return path frequency range of 5-65MHz, the initial installation of Odin PIO 1-4 65 as the Service Termination Point, is the best choice to ensure immediate access to 1300MHz (DOCSIS 3.1), and at the same time serve as platform for future DIY upgrades of the Push-In-Filter. In Push-In-Outlet installations the incoming cable is fitted with a suitable F-connector at once, and the Diplex filter can be exchanged over and over again, without damaging or cutting the incoming cable.

Complete outlet installation kit	Type	Item no.
Odin PIO 1-4 65		52470
Odin Face Plate - White	OFP-DTR	52481
Push-In-Filter	PIF 1-4 65	52410
Odin Frame - White	OFR	52480
90 degree Female F	90FF	84040
Odin PIO 1-4 65DVU		52471*
Odin Face Plate - White	OFP-DT	52482*
Push-In-Filter	PIF 1-4 65DVU	52415*
Odin Frame - White	OFR	52480
90 degree Female F	90FF	84040
Odin PIO 1-4 204		52472
Odin Face Plate - White	OFP-DT	52482*
Push-In-Filter	PIF 1-4 204	52412
Odin Frame - White	OFR	52480
90 degree Female F	90FF	84040
Odin PIO 1-4 204 2T		52474*
Odin Face Plate - White	OFP-DTT	52427*
Push-In-Filter	PIF 1-4 204 2T	52417*
Odin Frame - White	OFR	52480
90 degree Female F	90FF	84040
Odin PIO HNI		52473
Odin Face Plate - White	OFP-HNI	52483
Push-In-Filter	PIF HNI	52416
Odin Frame - White	OFR	52480
90 degree Female F	90FF	84040



Item numbers marked with * are special order products with MOQ

push-in-filters

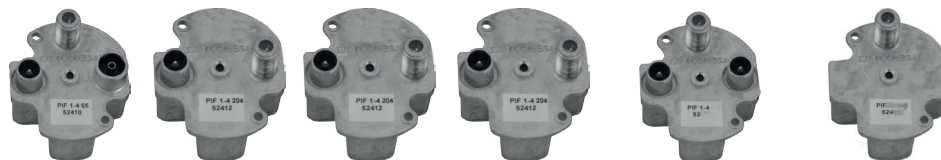

Data sheet

Type		PIF 1-4 65	PIF 1-4 65DVU	PIF 1-4 85	PIF 1-4 204	PIF 1-4 2042T	PIF HNI	
Version		Diplex	Diplex	Diplex	Diplex	Diplex	Transparent	
Push-In-Filter Item no.		52410	52415*	52411*	52412	52417*	52416	
Complete Freja coax outlet Item no.		52450	52451*	-	52452	52462*	52453	
Complete Odin coax outlet Item no.		52470	52471*	-	52472	52474*	52473	
Complete Euro coax outlet Item no.		52455	52456*	52458*	52457	52459*	52454	
DATA								
Frequency forward		118 - 1218 MHz	118 - 1218 MHz	118 - 1218 MHz	258 - 1218 MHz		5 - 1218 MHz	
Frequency reverse		5 - 65 MHz	5 - 65 MHz	5 - 85 MHz	5 - 204 MHz		5 - 1218 MHz	
Insertion loss forward	5-118MHz	-	-	-	-		< 0.1 (± 0.1) dB	
		-	-	-	-			
	118-125MHz		4.0 (± 1.2) dB				< 0.2 (± 0.2) dB	
	125-1006MHz		4.0 (± 0.8) dB					
	118-1006MHz	4.0 (± 0.8) dB		4.0 (± 0.8) dB	-		-	
	258-1006MHz	-		-	4.0 (± 0.8) dB		-	
	1006-1218MHz	4.0 (± 1) dB	4.0 (± 1,2) dB	4.0 (± 1) dB	4.0 (± 1) dB	4.0 (± 1.2) dB	<0.3 (± 0.2) dB	
Insertion loss reverse		0.6 (± 0.6) dB	0.7 (± 0.7) dB	0.6 (± 0.6) dB	0.6 (± 0.6) dB		Refer to IL forward	
Return loss		IEC 60728-4 5.3.4.2						
Isolation to DATA-TV	5-65MHz	> 40 dB	> 40 dB	-	-		-	
	5-85MHz	-	-	> 40 dB	-		-	
	5-204MHz	-	-	-	> 40 dB		-	
	118-862MHz	> 18 dB	> 18 dB	> 20 dB	-		-	
	258-790MHz	-	-	-	-		-	
	258-862MHz	-	-	-	> 20 dB		-	
	862-1218MHz	-	-	> 15 dB	>15 dB		-	
Isolation to DATA-FM	Return	> 40 dB	-	-	-		-	
	Forward	> 20 dB	-	-	-		-	
Connector		F-Female EN 61169-24					-	
TV								
Frequency range [MHz]		118 - 1218	87.5 - 1218	118 - 862	258 - 1218		-	
Insertion loss 87.5-108 MHz		-	4,5 (± 1,5) dB	-	-		-	
Insertion loss 118-125MHz		5.0 (± 1,5) dB	4.5 (± 1,5) dB		-		-	
Insertion loss 125-862MHz		5.0 (± 1,5) dB	4.5 (± 1,5) dB		-		-	
Insertion loss 118-125MHz				5.0 (± 1) dB	-		-	
Insertion loss 125-862MHz				4.0 (± 1) dB	-		-	
Insertion loss 258-265MHz					5.0 (± 1) dB	8.0 (± 1) dB	-	
Insertion loss 265-790MHz							-	
Insertion loss 265-862MHz					4.0 (± 0.8) dB	7.5 (± 1) dB	-	
Insertion loss 862-1218MHz		5.2 (± 2) dB	5.2 (± 2) dB		4.0 (± 1.5) dB	7.5 (± 1.5) dB	-	
Return loss ¹				IEC 60728-4 §5.3.4.2			-	
Isolation IN-TV		5.2 (± 2) dB	5.2 (± 2) dB	> 35 dB (5-85 MHz)	> 35 dB (5-205 MHz)		-	
Isolation TV-TV (258-862MHz		-				>22dB		-
Connector		IEC-Male EN61169-2					-	
FM								
Frequency range		87.5 - 108 MHz	-	-	-		-	
Insertion loss		5 (± 1.5) dB	-	-	-		-	
Return loss 87.5-108 MHz		>10 dB	-	-	-		-	
Connector		IEC-Female EN61169-2	-	-	-		-	
Common								
Input return loss TV (5-1218 MHz)		IEC 60728-4 §5.3.4.2 in passbands						
Input connector		Push-on IEC-Female EN61169-24						
Screening effective-ness	5 - 30 MHz	> 90 dB						
	30 - 300 MHz	> 85 dB						
	300 - 470 MHz	> 80 dB						
	470 - 1218 MHz	> 75 dB						
Operating temperature		0°C - 55°C						
Max dimensions (HxWxD)		Filters : 48.5x44x30; Euro 80.8x80.8x; xFreja 46.6x71.6x45.2;						
Metal Housing		RoHS compliant Zink alloy						

push-in-outlet installation tools

Product information

Push-in-outlet installation will often be done in tight confined spaces, a line of tools designed for stripping and compression in confined spaces has been developed to ease PIO installation.

PCS Family

The PIO Cable Stripper PCS-xx will work in extension of the cable direction and the head will, with ease, fit to the tight spaces usually found in coax outlet installation cases.

The PCT tools are available in 3 different versions, to match different cable dimensions.

To prevent contamination of the braid and braid penetration of skin, the PCS tool has a braid brush that allows the installer to straighten the braid without use of the fingertips



Type	PCS-RG6/59-OD	PCS-RG6/59-ID	PCS-5-ID
Push-In-Filter Item no.	91101	91104	91105
General description	Outdoor RG6 & RG59 cable	Indoor 6.7mm RG6 & RG59 cable	Indoor 5mm cable
Stripping length Center conductor	6.4mm	6.4mm	6.4mm
Stripping length Braid/Foil	6.4mm	6.4mm	6.4mm
Knifeblock color	Black	Grey	Orange

PCT

The POI Compression Tool PCT has a small narrow head and are suitable for compression of F-56-CX3 7.0QM Short connector as well as other common F-connectors and the 90-FMC and 90-C connectors. Furthermore with exchange of the plunger other Cablecon connectors can be compressed with the PTC tool

Product information




Type	PCT
Push-In-Filter Item no.	91103
Description	PIO Compression tool / Cablecon compression tool
Dimension (Long Plunger)	Open: 27.1mm / Closed : 15.2mm
Dimension (Short Plunger)	Open: 32mm / Closed : 20 mm

push-in-outlet parts

Product information

Intended for professional installers all parts can be purchased separately.



Description Push-in-Filters				Euro, Freja & Odin Push in filters					
				Type	Item no.	Quantity			
Data 65 MHz+118-1218MHz , TV 118-862MHz, Radio 87.5-108MHz				PIF 1-4 65	52410	10			
Data 85 MHz+118-1218MHz , TV 118-862MHz				PIF 1-4 85	52411*	10			
Data 204 MHz+258-1218MHz , TV 258-862MHz				PIF 1-4 204	52412	10			
Data 204 MHz+258-1218MHz , 2 pcs. TV 258-862MHz				PIF 1-4 204 2T	52417	10			
Data 65 MHz+118-1218MHz , Radio/TV 87,5-862MHz				PIF 1-4 65DVU	52415*	10			
Single Female F-Port 5-1218MHz				PIF HNI	52416	10			
Description Taps - For loopthrough				Euro, Freja & OdinPush in Taps					
				Type	Item no.	Quantity			
8dB Tap for mount on Freja or Euro Frame				PIT-8	52461	20			
10dB Tap for mount on Freja or Euro Frame				PIT-10	52462	20			
12,5dB Tap for mount on Freja or Euro Frame				PIT-12.5	52463	20			
16dB Tap for mount on Freja or Euro Frame				PIT-16	52464	20			
18dB Tap for mount on Freja or Euro Frame				PIT-18	52465	20			
Description Push-In-Outlet mounting frames									
		Euro Frames		Freja Frames		Odin Frames		Quantity	
		Type	Item no.	Type	Item no.	Type	Item no.		
Frame for PIF mounting - Euro and Freja are Black, Odin are White		EFr	52440	FFr	52430	OFr	52480	20	
Description face plates		Euro Face plates			Freja & Odin Face plates				
					Freja Face plates		Odin Face plates		Quantity
		Type	Item no.	Quantity	Type	Item no.	Type	Item no.	
Data, TV, Radio - White - Matches PIF 1-4 65		EFP-DTR	52441	20	FFP-DTR	52431	OFP-DTR	52481	20
Data, TV - White- Matches PIF 1-4 85 , 1-4 204 and DVU		EFP-DT	52442	20	FFP-DT	52432	OFP-DT	52482	20
Data, TV - White- Matches 1 Port PIF HNI		EFP-HNI	52443	20	FFP-HNI	52433	OFP-HNI	52483	20
Data, 2xTV - White Matches PIF 1-4 204 2T		EFP-DTT	52444	20	FFP-DTT	52424	OFP-DTT	52427	20
Data, TV, Radio - Light Grey - Matches PIF 1-4 65					FFP-DTR-G	52434*	OFP-DTR-G	52484*	20
Data, TV, Radio - Antracite - Matches PIF 1-4 65					FFP-DTR-KG	52435*	OFP-DTR-KG	52485*	20
Data, TV, Radio - Light Grey - Matches PIF 1-4 204, PIF 1-4 65DVU					FFP-DT-G	52437*	OFP-DT-G	52487*	20
Data, TV, Radio - Antracite - Matches PIF 1-4 204, PIF 1-4 65DVU					FFP-DT-KG	52438*	OFP-DT-KG	52488*	20
Data, TV - Light Grey- Matches 1 Port PIF HNI					FFP-HNI-G	52436*	OFP-HNI-G	52486*	20
Data, TV - Antracite - Matches 1 Port PIF HNI					FFP-HNI-KG	52439*	OFP-HNI-KG	52489*	20
Data, 2xTV - Light Grey- Matches 3 Port PIF 1-4 204 2T					FFP-DTT-G	52425*	OFP-DTT-G	52428*	20
Data, 2xTV - Antracite - Matches 3 Port PIF 1-4 204 2T					FFP-DTT-KG	52426*	OFP-DTT-KG	42429*	20
Description Push-In-Outlet interface connectors				Euro & Freja Push in connectors					
				Type	Item no.	Quantity			
90 degree Female F to Female PIF connector (Push-On-connector)				90FF	84040	100			
90 degree Female PIF Connector (Push-on-connector) to Mini cable - For interfacing mini cable directly to Push-In-Filter				90-FCM	84041	10			
90 degree Threaded Female F to mini 3.6mm compression connector- For interfacing mini cable to F connector				90-TFCM	84042	10			
90 degree Female F 13 cm mini cable to PIF connector - Extension jumper for difficult cable mounts				90FF13	84043	20			
Straight quick mount F-connector - interface on incoming cable				F-56-CX3 7.0QM Short	84050	100			
90 degree quick mount PIO-connector - for direct moun on DG135, 11/48 and similar cable types				90-DKT-56-CX3 7.0 QM	84051	100			
90 degree quick mount PIO-connector - for direct moun on DG80 and similar cable types				90-DKT-56-CX3 5.0 QM	84052	100			
Description Push-In-Outlet frame claws and elastics bands			Euro PIO accessories			Freja PIO accessories			
			Type	Item no.	Quantity	Type	Item no.	Quantity	
Euro Frame Claws and screws for mount in cavity without screw towers			EFCS	52449	100	-	-		
PIO Elastics band			PEB	52448	100	PEB	52448	100	
Installation tools									

Item numbers marked with * are special order products with MOQ

Patented

October 5th, 2017

connectors for push-in-outlets

Product information

Depending if new installations are made or the outlets are replacing a previous installation , the cable length and installation space will be different.



In the majority of cases the incoming cable will be terminated e.g. by means of a Short quickmount Male F-connector and connection to the Push-in-filter of the outlet through the 90FF connector.



For more challenging installations where flexibility or length of the incoming cable does not allow the 90FF connector to be used, the 90FF jumper cable will provide plenty of mechanical flexibility.

For cases where the Mini cable is used the 90-FMC connector will fit directly on the cable.




Type		90FF	90-FCM	90-TFCM	90FF13	F-56-CX3 7.0QM Short	90-DKT-56-CX3 7.0 QM	90-DKT-56-CX3 5.0 QM
Item no.		84040	84041	84042	84043	84050	84051	84052
Input interface		Female F	3.6mm Compression	Female F	Female F	Compression	7mm Compression	5mm Compression
Output interface		Female Push-on- F		3.6mm Compression	Female Push-on- F	Male F	Female Push-on- F	
DATA							Preliminary data*	
Insertion loss forward	5-204MHz	< 0.2 dB	< 0.2 dB		<0,5 dB	Refer to Datasheet (Next page)	Datasheet pending	
	204-1006MHz	< 0.2 dB	< 0.2 dB		<0,5 dB			
	1006-1218MHz	< 0.4 dB	< 0.4 dB		<1 dB			
Return Loss [dB]		5-65MHz: >38 65-205MHz: >31 205-470MHz: >23 258-862MHz: >16 862-1006MHz: >15 1006-1700MHz: >10	5-47MHz: >22dB 47-950MHz: >22dB-1.5dB/oct 950-1000: >11.5dB 1-1.7GHz: Linear: >11.5@1GHz, >10@1.7GHz					
		EN 60966-2-7 Class A 30 - 1000 MHz : > 85 dB 1 - 2 GHz : > 85 dB 2 - 3 GHz : > 65 dB						
screening effectiveness							22.1x11.9x31.9 mm	
Dimensions prior to compression		-	21.3x11x22.2mm	21.8x11x19.1mm	-		22.1x11.9x27.2mm	
Dimensions after compression		-	21.3x11x22.2mm	21.8x11x19.1mm	-			
Operating temperature		-10° C - 55° C						
Dimensions (LxWxH)		22.2x19.8x11mm	-	-	145±5mm 11mm 22.2mm		Refer to Datasheet (2 pages ahead)	Refer to Datasheet (3 pages ahead)
Metal Housing		Plated Zn & Brass - RoHS compliant						
Cable type		-	-	-	CW41SOHW 1/5			

F-56-CX3 7.0QM Short specification

CORNING

Datasheet

Item no.	99909428	Connector type	F-56-CX3 7.0 QM SHORT		
DKTCOMEGA no.	84050	For cable	Ören Kablo HD 103 PLUS		
Frequency Range	0.3 - 3000 MHz		Product photo		
Impedance (Nom.)	75 Ohm				
Amp. Rating (measured)	Cable data				
(calculated)	Cable data				
Transfer Impedance (CoMeT)	Class A++				
	<0.9 mΩ/m @ 5-30MHz				
	<0.02 mΩ/item @ 5-30MHz				
	Class A++				
Screening Attenuation(CoMeT)	>125 dB @ 30-1000MHz				
	>125 dB @ 1000-2000MHz				
	>110 dB @ 2000-3000MHz				
Return Loss (IEC 61169-1)	Better than	Typical	Insertion Loss Max.		Better than
0.3 - 500 MHz	-35 dB	-37.6 dB	0.3 - 500 MHz	-0.06 dB	
500 - 860 MHz	-34 dB	-36.9 dB	500 - 860 MHz	-0.06 dB	
860 - 1000 MHz	-34 dB	-36.4 dB	860 - 1000 MHz	-0.06 dB	
1000 - 1750 MHz	-31 dB	-33.7 dB	1000 - 1750 MHz	-0.06 dB	
1750 - 2150 MHz	-30 dB	-32.5 dB	1750 - 2150 MHz	-0.06 dB	
2150 - 3000 MHz	-27 dB	-30.1 dB	2150 - 3000 MHz	-0.06 dB	
Temperature			Intermodulation	IM3	
Installing	-5° to +50° C		3rd Order (@2x0,5W)	-155 dBc	
Operating	-40° to +70° C		Inner Conductor Resistance		
Storing	-40° to +70° C		(@ 1 A DC)	Cable data	
Sealing Test (IEC IP-code)	N/A		Insulation Resistance		
			(@ 500 VDC)	Cable data	
O-rings	-		Dielectric Strength		
			DC Test Voltage	Cable data	
Base Material			Max. Tensile Strength		
Body Parts	Brass / POM		Overall	>31 Kgf	
Inner Conductor	Cable data			>304 N	
Plating			Torsional Strength		
Body Parts	Nitin-6		(Connector / Cable)	* NATM	
Inner Conductor	Cable data		Test performed by	Sven-Erik Sandberg	
Insulators	Cabel data		Date of release	September 27, 2016	
Remarks	* Not Able To Measure(NATM): The cable starts to twist without the connector loosing its grip.				

Remarks * Not Able To Measure(NATM): The cable starts to twist without the connector loosing its grip.

All tests performed using instruments calibrated in accordance to our ISO 9001 certification.
Further technical specifications and installation instructions can be obtained on request.

© Copyright Corning Optical Communications ApS – 2015

ISO 9001:2008 / ISO 14001 certified

Distributor:

Corning Optical Communications ApS
Industriparken 10, DK-4760 Vordingborg, Denmark
Tel: +45 55 98 55 99 Fax: +45 55 98 55 04
cabelcon@corning.com www.cabelcon.dk

Corning Public

Form 041 rev 16

Matching cable guide are available from Corning Cablecon web page




<https://goo.gl/34dvLH>

October 5th, 2017

90-DKT-56-CX3 7.0QM specification

CORNING

Datasheet

Item no.	99909598-01	Connector type	90-DKT-56-CX3 7.0 QM		
DKT Item no.	84051	For cable	Cavel 1.1/5.0		
Frequency Range	0.3 - 3000 MHz		Product photo		
Impedance (Nom.)	75 Ohm				
Amp. Rating (measured)	2.5 A @10°C increase				
(calculated)	3.5 A @20°C increase				
Transfer Impedance (CoMeT)	Class A				
	<5.0 mΩ/m @ 5-30MHz				
	0,14 mΩ/item @ 5-30MHz				
Screening Attenuation(CoMeT)	Class A+				
	>95 dB @ 30-1000MHz				
	>85 dB @ 1000-2000MHz				
	>75 dB @ 2000-3000MHz				
Return Loss (IEC 61169-1)	Better than	Typical	Insertion Loss Max.	Better than	
0.3 - 500 MHz	-26 dB	-29.2 dB	0.3 - 500 MHz	-0.10 dB	
500 - 860 MHz	-23 dB	-25.9 dB	500 - 860 MHz	-0.13 dB	
860 - 1000 MHz	-22 dB	-24.9 dB	860 - 1000 MHz	-0.13 dB	
1000 - 1750 MHz	-17 dB	-20.0 dB	1000 - 1750 MHz	-0.18 dB	
1750 - 2150 MHz	-16 dB	-18.7 dB	1750 - 2150 MHz	-0.21 dB	
2150 - 3000 MHz	-15 dB	-17.5 dB	2150 - 3000 MHz	-0.39 dB	
Temperature			Intermodulation		
Installing	-5° to +50° C		3rd Order (@2x+27dBm)	-135 dBc	
Operating	-40° to +70° C		Inner Conductor Resistance		
Storing	-40° to +70° C		(@ 1 A DC)	<15.9 mΩ	
Sealing Test			Insulation Resistance		
(IEC IP-code)	-		(@ 500 VDC)	>200 GΩ	
O-rings	-		Dielectric Strength		
			DC Test Voltage	>2.0 KV	
Base Material			Max. Tensile Strength		
Body Parts	Brass CuZn39Pb3		Overall	>20 Kgf	
Inner Conductor	Beryllium copper			>196 N	
Plating			Torsional Strength		
Body Parts	Nitin-6		(Connector / Cable)	* NATM	
Inner Conductor	Nitin-6		Test performed by	Susanne Lindharth	
Insulators	POM		Date of release	September 25, 2017	
Remarks	* Not Able To Measure(NATM): The cable starts to twist without the connector loosing its grip.				

All tests performed using instruments calibrated in accordance to our ISO 9001 certification.
Further technical specifications and installation instructions can be obtained on request.

© Copyright Corning Optical Communications ApS – 2015

ISO 9001:2008 / ISO 14001 certified

Distributor:

Corning Optical Communications ApS
Industriparken 10, DK-4760 Vordingborg, Denmark
Tel: +45 55 98 55 99 Fax: +45 55 98 55 04
cabelcon@corning.com www.cabelcon.dk

Corning Public

Form 041 rev 16

Matching cable guide are available from Corning Cablecon web page






<https://goo.gl/34dvLH>

October 5th, 2017

90-DKT-56-CX3 5.0QM specification

CORNING

Datasheet

Item no.	99909599	Connector type	90-DKT-56-CX3 5.0 QM		
DTK Item no.	84052	For cable	Draka Coax 11 AD 08S		
Frequency Range	0.3 - 3000 MHz		Product photo		
Impedance (Nom.)	75 Ohm				
Amp. Rating (measured)	2.5 A @10°C increase				
(calculated)	3.5 A @20°C increase				
Transfer Impedance (CoMeT)	Class A+				
	<2.5 mΩ/m @ 5-30MHz				
	0.06 mΩ/item @ 5-30MHz				
	Class A++				
Screening Attenuation(CoMeT)	>105 dB @ 30-1000MHz				
	>95 dB @ 1000-2000MHz				
	>85 dB @ 2000-3000MHz				
Return Loss (IEC 61169-1)	Better than	Typical	Insertion Loss Max.	Better than	Typical
0.3 - 500 MHz	-26 dB	-28.7 dB	0.3 - 500 MHz	-0.15 dB	-0.10 dB
500 - 860 MHz	-24 dB	-26.4 dB	500 - 860 MHz	-0.19 dB	-0.14 dB
860 - 1000 MHz	-23 dB	-25.7 dB	860 - 1000 MHz	-0.20 dB	-0.15 dB
1000 - 1750 MHz	-19 dB	-22.0 dB	1000 - 1750 MHz	-0.22 dB	-0.17 dB
1750 - 2150 MHz	-18 dB	-21.0 dB	1750 - 2150 MHz	-0.26 dB	-0.21 dB
2150 - 3000 MHz	-17 dB	-19.7 dB	2150 - 3000 MHz	-0.58 dB	-0.53 dB
Temperature			Intermodulation		
Installing	-5° to +50° C		3rd Order (@2x+20dBm)	-116 dBm	
Operating	-40° to +70° C		Inner Conductor Resistance		
Storing	-40° to +70° C		(@ 1 A DC)	<35.0 mΩ	
Sealing Test (IEC IP-code)	-		Insulation Resistance		
			(@ 500 VDC)	>200 GΩ	
O-rings	-		Dielectric Strength		
			DC Test Voltage	>2.0 KV	
Base Material			Max. Tensile Strength		
Body Parts	Brass CuZn39Pb3		Overall	>15 Kgf	
Inner Conductor	Beryllium copper			>147 N	
Plating			Torsional Strength		
Body Parts	Nitin-6		(Connector / Cable)	* NATM	
Inner Conductor	Nitin-6				
Insulators	POM		Test performed by	Susanne Lindharth	
			Date of release	September 25, 2017	
Remarks	* Not Able To Measure(NATM): The cable starts to twist without the connector loosing its grip.				

All tests performed using instruments calibrated in accordance to our ISO 9001 certification.
Further technical specifications and installation instructions can be obtained on request.

© Copyright Corning Optical Communications ApS – 2015

ISO 9001:2008 / ISO 14001 certified

Distributor:

Corning Optical Communications ApS
Industriparken 10, DK-4760 Vordingborg, Denmark
Tel: +45 55 98 55 99 Fax: +45 55 98 55 04
cabelcon@corning.com www.cabelcon.dk

Corning Public

Form 041 rev 16

Matching cable guide are available from Corning Cablecon web page




<https://goo.gl/34dvLH>

October 5th, 2017

push-in-taps for push-in-outlets

Product information

For loop through installations all types of Push-in outlets can be supplemented with the Push-In-Tap. Once the initial installation is made, by mounting the drop and loop through cables in the Push-in-Tap, the Push-In-Filter characteristics of the outlet can be changed over and over again, simply by replacing the PIF filter for another version. The flexibility offered by maintaining the loop-through part of the installation and only replacing the filter to meet future needs means that future replacements is so easy that even do-it-yourself upgrades is possible.

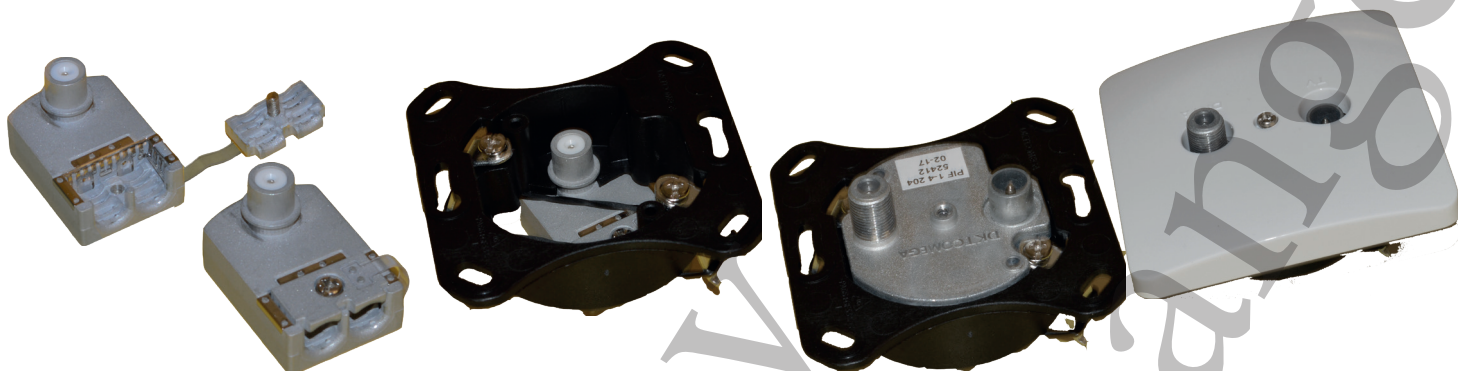

Type		PIT 8	PIT 10	PIT 12.5	PIT 16	PIT 18
Item no.		52465	52466	52467	52468	52469
DATA						
In-Tap loss [dB]	5-1218MHz	8 ±0.6	10 ±0.6	12.5 ±0.6	16 ±0.6	18 ±0.6
	1218-1800MHz	8 ±1	10 ±1	12.5 ±1	16 ±1	18 ±1
Insertion loss forwardIn-Out [dB]	5-470MHz	1.7	1.0	0.7	0.6	0.6
	470-862MHz	2.1	1.4	1.0	0.8	0.8
	862-1000MHz	2.4	1.9	1.2	1.0	1.0
	1000-1218MHz	2.8	2.4	1.8	1.6	1.6
	1218-1800MHz	3	2.6	2.0	1.8	1.8
Return Loss [dB]		5-47MHz: >22dB 47-950MHz: >22dB-1.5dB/oct and >10dB 950-1800: >10dB decreasing linear to 8.3dB				
screening effectiveness measured on DG135 cable		EN 60966-2-7 Class A 30 - 1000 MHz : > 85 dB 1 - 2 GHz : > 85 dB 2 - 3 GHz : > 65 dB				
Input/Output interface		Coax, Center conductor 0.41-1-13mm; Outer jacket -7.4mm				
Tap interface		Female Push-on- F for PIF filters				
Operating temperature		-10°C - 55°C				
Dimensions (LxWxH)		22.2x26.2x37.9				
Metal Housing		RoHS compliant Zn alloy				