


Requires the installation of a:

Gateway module



OR

Connected Starter Pack
"... with Netatmo"




OR



Any kind of
"with Netatmo"
gateway

Composition

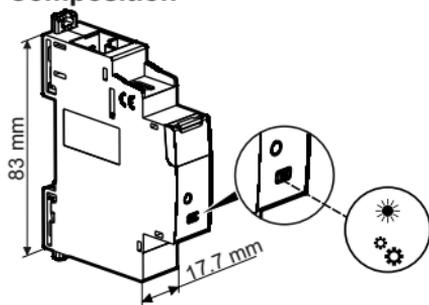

Connected energy meter

+



! Pay attention to the direction of the current

Measure coil

	U	I measure	F	Accuracy kWh	Measure kWh
+5°C +45°C	100-240V~ 50 / 60Hz	80A MAX	2,4 à 2,4835Ghz <100 mW	+/-1% under 63A	Global or Per circuit

CE Directive
Compliant with the following European directive:

Low voltage directive
(LVD) 2014/35/UE



Electromagnetic compatibility
(CEM) n° 2014/30/UE

Imperative security precaution




The instructions for installation and use must be strictly observed in order to avoid the risk of electric shock or fire.


1 Preparation, connexion

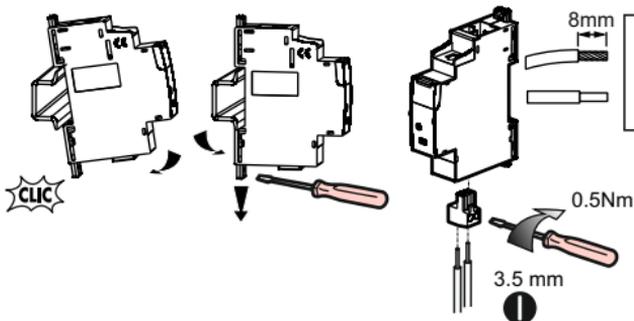

Wiring

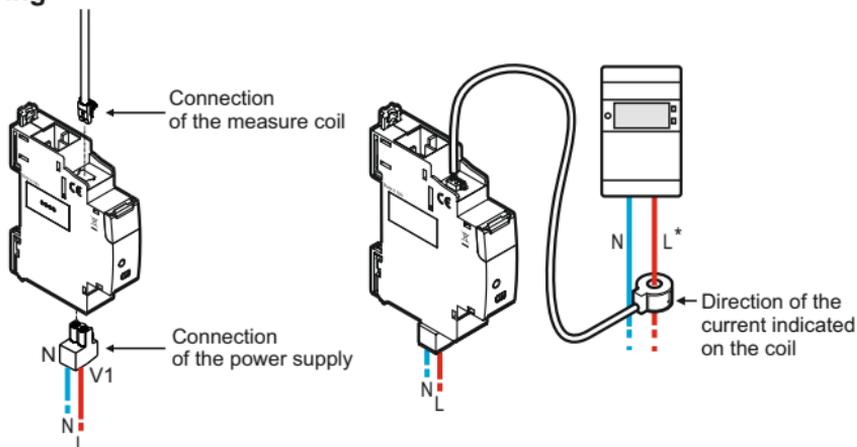




A circuit breaker with rated current C2 to C16 is necessary depending on wire section used for supplying the energy meter.

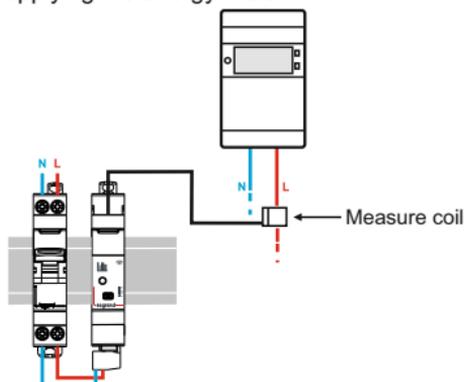

*: Do not use on a three Lines electrical installation.

— N (neutral) = blue — L (Line) = Everything but blue and green/yellow

② Add the Energy meter in a connected installation

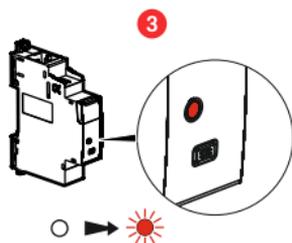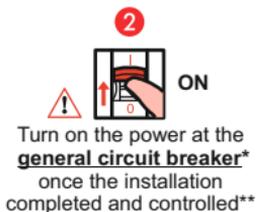

* In order to restart all connected products at the same time.

** : After wiring the installation, refit the front plate so that no active live part is accessible.

③ Finalize the installation in the Legrand Home + Control app

Download the Home + Control App and follow the instructions for adding the connected product in your setup.




You also have the option of controlling your installation via a voice assistant and can customize your scenarios via the Home + Control App.



Reset an Energy meter to remove it from a connected installation

Press the the configuration button of the Energy meter (> 5 seconds) until the configuration indicator lights up in fixed red. It is no longer associated with the gateway present in the installation.

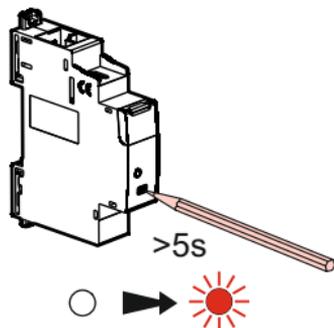



www.legrand.fr/reference/412015

LEGRAND - Pro and Consumer Service - BP 30076
87002 LIMOGES CEDEX FRANCE • www.legrand.com

UE SIMPLIFIED DECLARATION OF CONFORMITY

The undersigned,

Legrand

declares that the radio equipment listed on this instruction sheet
are compliant to the directive 2014/53/UE.

The full text of the UE declaration of conformity
is available at the following website:

www.legrandoc.com