

PC T8 PRO Ip, PC T8 PRO sl, 18 – 58 W PC PRO T8

Product description

- Highest possible CELMA Energy Efficiency Index EEI = A2 BAT
- Nominal life up to 100,000 h (at ta. 50 °C with a failure rate max. 0.1 % per 1,000 h)
- Large temperature range (for values see table)
- Intelligent Voltage Guard (overvoltage indication and undervoltage shutdown)
- Precise lamp operation using adjustment of lamp parameters
- Advanced SMART-Heating for min. 50,000 starts without replacement of lamps
- Constant luminous flux irrespective of fluctuations in mains voltage
- Designed for THD < 10 %
- For luminaires of protection class I and protection class II
- Automatic start after replacement of defective lamps
- Safety shutdown of defective lamps and at end of lamp life (EOL 2)
- Insulation Displacement Connection (IDC) terminal for rapid automatic or manual wiring
- For emergency lighting systems as per EN 50172



Fig. 1


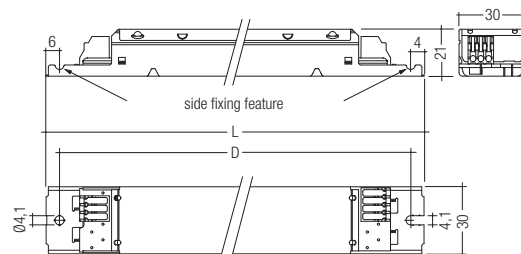


Fig. 2

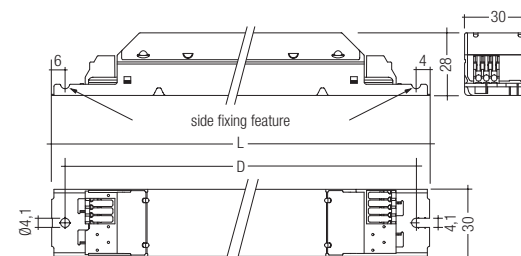

Technical data

Voltage range	220 – 240 V
AC voltage range	198 – 264 V
DC voltage range	176 – 280 V (lamp start ≥ 198 V DC)
Mains frequency	0 / 50 / 60 Hz
Overvoltage protection	320 V AC, 1 h
Defined warm start	≤ 1.5 s
Operating frequency	≥ 39,5 kHz
Type of protection	IP20

Ordering data

Type	Article number	Figure	Packaging carton	Packaging low volume	Packaging high volume	Weight per pc.
For luminaires with 1 lamp						
PC 1x18 T8 PRO Ip	22185213	1	50 pc(s).	1,050 pc(s).	3,150 pc(s).	0.146 kg
PC 1x36 T8 PRO Ip	22185214	1	50 pc(s).	1,050 pc(s).	3,150 pc(s).	0.144 kg
PC 1x58 T8 PRO Ip	22185215	1	50 pc(s).	1,050 pc(s).	3,150 pc(s).	0.143 kg
For luminaires with 2 lamps						
PC 2x18 T8 PRO Ip	22185216	1	50 pc(s).	900 pc(s).	2,700 pc(s).	0.170 kg
PC 2x36 T8 PRO sl	22185217	2	50 pc(s).	900 pc(s).	2,700 pc(s).	0.211 kg
PC 2x58 T8 PRO sl	22185218	2	50 pc(s).	900 pc(s).	2,700 pc(s).	0.216 kg
For luminaires with 3 or 4 lamps						
PC 3/4x18 T8 PRO Ip	22185219	1	10 pc(s).	960 pc(s).	–	0.192 kg



Standards, page 2

Wiring diagrams and installation examples, page 5

Specific technical data

Lamp wattage	Lamp type	Type	Article number	Dimensions L x W x H	Hole spacing D	Lamp power	Circuit power	EEI	Current at 50 Hz		λ at 50 Hz		tc point max.	Ambient temperature ta	tc/ta for ≥ 50,000 h
									220 V	240 V	220 V	240 V			
For luminaires with 1 lamp															
1 x 18 W	T8	PC 1x18 T8 PRO Ip	22185213	230 x 30 x 21 mm	220 mm	16.0 W	18.3 W	A2 BAT	0.081 A	0.073 A	0.98	0.96	80 °C	-25 ... 70 °C	75/65 °C
1 x 36 W	T8	PC 1x36 T8 PRO Ip	22185214	230 x 30 x 21 mm	220 mm	32.0 W	35.2 W	A2 BAT	0.158 A	0.142 A	0.99	0.97	75 °C	-25 ... 65 °C	70/60 °C
1 x 55 W	TC-L	PC 1x58 T8 PRO Ip	22185215	230 x 30 x 21 mm	220 mm	51.5 W	56.0 W	A2 BAT	0.255 A	0.233 A	0.99	0.97	75 °C	-25 ... 55 °C	70/50 °C
1 x 58 W	T8	PC 1x58 T8 PRO Ip	22185215	230 x 30 x 21 mm	220 mm	50.0 W	54.5 W	A2 BAT	0.245 A	0.220 A	0.99	0.97	75 °C	-25 ... 55 °C	70/50 °C
For luminaires with 2 lamps															
2 x 18 W	T8	PC 2x18 T8 PRO Ip	22185216	280 x 30 x 21 mm	270 mm	32.0 W	35.3 W	A2 BAT	0.159 A	0.143 A	0.99	0.97	80 °C	-25 ... 70 °C	75/65 °C
2 x 36 W	T8	PC 2x36 T8 PRO sl	22185217	280 x 30 x 28 mm	270 mm	64.0 W	70.7 W	A2 BAT	0.320 A	0.293 A	0.99	0.98	75 °C	-25 ... 60 °C	75/60 °C
2 x 55 W	TC-L	PC 2x58 T8 PRO sl	22185218	280 x 30 x 28 mm	270 mm	108.3 W	112.8 W	A2 BAT	0.513 A	0.470 A	0.99	0.98	75 °C	-25 ... 55 °C	70/50 °C
2 x 58 W	T8	PC 2x58 T8 PRO sl	22185218	280 x 30 x 28 mm	270 mm	100.0 W	109.0 W	A2 BAT	0.490 A	0.445 A	0.99	0.98	75 °C	-25 ... 55 °C	70/50 °C
For luminaires with 3 or 4 lamps															
3 x 18 W	T8	PC 3/4x18 T8 PRO Ip	22185219	280 x 30 x 21 mm	270 mm	48.0 W	53.2 W	A2 BAT	0.247 A	0.226 A	0.99	0.97	80 °C	-25 ... 70 °C	75/65 °C
4 x 18 W	T8	PC 3/4x18 T8 PRO Ip	22185219	280 x 30 x 21 mm	270 mm	64.0 W	69.2 W	A2 BAT	0.321 A	0.294 A	0.99	0.97	80 °C	-25 ... 65 °C	75/60 °C

Standards

EN 55015
EN 61347-2-4
EN 61347-2-3
EN 60929
EN 61000-3-2
EN 61547
in accordance with EN 50172
IEC 68-2-64 Fh
IEC 68-2-29 Eb
IEC 68-2-30

Lamp starting characteristics

Warm start
Starting time 1.5 s with AC and DC operation
Cathode heating will be strongly reduced after pre-heating time

AC operation

Mains voltage:
220–240 V 50/60 Hz
198–264 V 50/60 Hz including safety tolerance ($\pm 10\%$)
202–254 V 50/60 Hz including performance tolerance ($+6\%$ / -8%)

DC operation

220–240 V 0 Hz
198–280 V 0 Hz certain lamp start
176–280 V 0 Hz operating range
Light output level in DC operation: 100 %

Emergency lighting

Use in emergency lighting installations according to EN 50172 or for emergency luminaires according to EN 61347-2-3 appendix J.

Instant start after mains interruption < 0.5 s
EBLF = 1.00

Intelligent Voltage Guard

Intelligent Voltage Guard is the name of an electronic monitor from Tridonic. This innovative feature of the PC PRO family of control gear from Tridonic immediately shows if the mains voltage rises above or falls below certain thresholds. Measures can then be taken quickly to prevent damage to the control gear.

- If the mains voltage rises above ≥ 280 V the lamps flash.
- This signal “demands” disconnection of the power supply to the lighting system.
- If the mains voltage falls below 130 V the control gear automatically disconnects the lamp circuit (light off) to protect the control gear from being irreparably damaged.

Advanced SMART-Heating

PC PRO with SMART-Heating ignition technology optimises lamp start and ensures no energy is wasted. After the lamp has struck the filament heating is reduced automatically to a defined minimum value. This reduction in filament heating, saves energy, yet maintains the proper operating conditions for the lamp. The lamp is always operated within specification.

Mains currents in DC operation

Type	lamp type	wattage	mains current at $U_n = 220\text{ V}_{DC}$	mains current at $U_n = 240\text{ V}_{DC}$
PC 1x18 T8 PRO Ip	T8	1x18 W	81 mA	73 mA
PC 1x36 T8 PRO Ip	T8	1x36 W	158 mA	142 mA
PC 1x58 T8 PRO Ip	TC-L	1x55 W	255 mA	233 mA
	T8	1x58 W	245 mA	220 mA
PC 2x18 T8 PRO Ip	T8	2x18 W	159 mA	143 mA
PC 2x36 T8 PRO sl	T8	2x36 W	320 mA	293 mA
PC 2x58 T8 PRO sl	TC-L	2x55 W	490 mA	445 mA
	T8	2x58 W	490 mA	445 mA
PC 3/4x18 T8 PRO Ip	T8	3x18 W	247 mA	226 mA
	T8	4x18 W	321 mA	294 mA

Harmonic distortion in the mains supply

Type	lamp type	wattage	THD at 230 V / 50 Hz
PC 1x18 T8 PRO Ip	T8	1x18 W	$< 10\%$
PC 1x36 T8 PRO Ip	T8	1x36 W	$< 10\%$
PC 1x58 T8 PRO Ip	TC-L	1x55 W	$< 10\%$
	T8	1x58 W	$< 10\%$
PC 2x18 T8 PRO Ip	T8	2x18 W	$< 10\%$
PC 2x36 T8 PRO sl	T8	2x36 W	$< 10\%$
PC 2x58 T8 PRO sl	TC-L	2x55 W	$< 10\%$
	T8	2x58 W	$< 10\%$
PC 3/4x18 T8 PRO Ip	T8	3x18 W	$< 10\%$
	T8	4x18 W	$< 10\%$

Output voltage

Type	lamp type	wattage	U_{out}
PC 1x18 T8 PRO Ip	T8	1x18 W	400
PC 1x36 T8 PRO Ip	T8	1x36 W	400
PC 1x58 T8 PRO Ip	TC-L	1x55 W	400
	T8	1x58 W	400
PC 2x18 T8 PRO Ip	T8	2x18 W	400
PC 2x36 T8 PRO sl	T8	2x36 W	400
PC 2x58 T8 PRO sl	TC-L	2x55 W	400
	T8	2x58 W	400
PC 3/4x18 T8 PRO Ip	T8	3x18 W	350
	T8	4x18 W	350

Ballast lumen factor (EN 60929 8.1)

Type	lamp type	wattage	AC/DC-BLF at $U = 198\text{--}254\text{ V}$, $25\text{ }^{\circ}\text{C}$
PC 1x18 T8 PRO Ip	T8	1x18 W	1.00
PC 1x36 T8 PRO Ip	T8	1x36 W	1.00
PC 1x58 T8 PRO Ip	TC-L	1x55 W	0.95
	T8	1x58 W	1.00
PC 2x18 T8 PRO Ip	T8	2x18 W	1.00
PC 2x36 T8 PRO sl	T8	2x36 W	1.00
PC 2x58 T8 PRO sl	TC-L	2x55 W	0.97
	T8	2x58 W	1.00
PC 3/4x18 T8 PRO Ip	T8	3x18 W	1.00
	T8	4x18 W	1.00

PC PRO with x!tec II processor

Is the very latest in lighting management design technology. The lamp friendly warm start is delivering maximum lamp life and enables many switching frequency applications. Smallest power loss and new freedom in the lamp design thanks to convincing thermal management.

Energy class: CELMA EEI = A2 BAT¹⁾


Maximum energy efficiency:

Right from the early stages in the development of x!tec II technology the focus has always been on achieving maximum energy efficiency. In conjunction with SMART-Heating Technology, PC T8 PRO is rated in the best possible efficiency class of A2 BAT that CELMA provides for ballasts with a constant luminous flux.


¹⁾ according to the EU directives on ecodesign requirements (EC) No. 245/2009 and (EC) No. 347/2010

Ambient Temperature


PC 1x... T8 PRO Ip

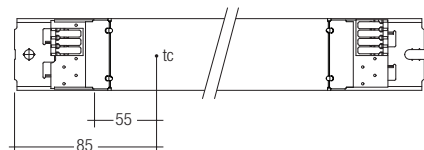

PC 2x... T8 PRO Ip/sl

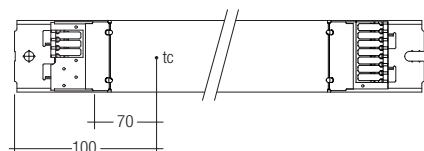

PC 3/4x... T8 PRO Ip

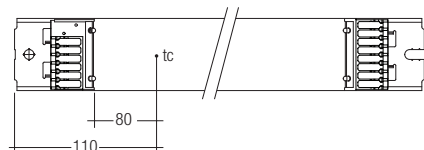

The nominal t_a and t_c point are related to the ballast life duration.

The relation of t_c to t_a temperature depends also on the luminaire design. If the measured t_c temperature is approx. 5 K below t_c max., t_a temperature should be checked and eventually critical components (e.g. ELCAP) measured.

Detailed information on request.

PC T8 PRO is designed for an average life-time of 100,000 h (at t_a for $\geq 100,000$ h) under reference conditions and with a failure probability of less than 10 %. This corresponds to an average failure rate of 0.1 % for every 1,000 hours of operation.

Humidity: 5 % up to max. 85 %, not condensed (max. 56 days/year at 85 %)

Storage temperature: -40 °C up to max. +80 °C

The devices have to be within the specified temperature range (t_a) before they can be operated.

Expected life-time

Type	Lamp type	Lamp wattage	t_a	40 °C	50 °C	55 °C	60 °C	65 °C	70 °C
PC 1x18 T8 PRO Ip	T8	1x18 W	t_c	50 °C	60 °C	65 °C	70 °C	75 °C	80 °C
			Life-time	> 100,000 h	> 100,000 h	> 100,000 h	75,000 h	55,000 h	40,000 h
PC 1x36 T8 PRO Ip	T8	1x36 W	t_c	50 °C	60 °C	65 °C	70 °C	75 °C	x
			Life-time	> 100,000 h	> 100,000 h	80,000 h	60,000 h	40,000 h	x
PC 1x58 T8 PRO Ip	TC-L T8	1x55 W 1x58 W	t_c	60 °C	70 °C	75 °C	x	x	x
			Life-time	100,000 h	50,000 h	40,000 h	x	x	x
PC 2x18 T8 PRO Ip	T8	2x18 W	t_c	50 °C	60 °C	65 °C	70 °C	75 °C	80 °C
			Life-time	> 100,000 h	> 100,000 h	> 100,000 h	70,000 h	50,000 h	35,000 h
PC 2x36 T8 PRO sl	T8	2x36 W	t_c	55 °C	65 °C	70 °C	75 °C	x	x
			Life-time	> 100,000 h	100,000 h	80,000 h	50,000 h	x	x
PC 2x58 T8 PRO sl	TC-L T8	2x55 W 2x58 W	t_c	65 °C	70 °C	75 °C	x	x	x
			Life-time	70,000 h	50,000 h	35,000 h	x	x	x
PC 3/4x18 T8 PRO Ip	T8	3x18 W	t_c	50 °C	60 °C	65 °C	70 °C	75 °C	80 °C
			Life-time	> 100,000 h	> 100,000 h	> 100,000 h	80,000 h	60,000 h	40,000 h
	T8	4x18 W	t_c	55 °C	65 °C	70 °C	75 °C	80 °C	x
			Life-time	> 100,000 h	100,000 h	70,000 h	50,000 h	35,000 h	x

x = not permitted

Maximum loading of automatic circuit breakers

Automatic circuit breaker type	C10	C13	C16	C20	B10	B13	B16	B20	Inrush current	
Installation Ø	1.5 mm ²	1.5 mm ²	1.5 mm ²	2.5 mm ²	1.5 mm ²	1.5 mm ²	1.5 mm ²	2.5 mm ²	I_{max}	Pulse
PC 1x18 T8 PRO Ip	44	64	74	104	22	32	37	52	12.9 A	208 µs
PC 1x36 T8 PRO Ip	38	52	60	72	19	26	30	36	17.4 A	203 µs
PC 1x58 T8 PRO Ip	29	38	47	59	19	28	40	46	17.9 A	169 µs
PC 2x18 T8 PRO Ip	36	50	60	72	18	25	30	36	18.3 A	184 µs
PC 2x36 T8 PRO sl	23	31	38	44	12	16	19	22	43.2 A	150 µs
PC 2x58 T8 PRO sl	14	19	23	29	11	17	23	29	50.2 A	175 µs
PC 3/4x18 T8 PRO Ip	23	30	37	46	15	20	26	32	22.7 A	219 µs

Wiring advice

The lead length is dependant on the capacitance of the cable.
For safety reasons, the PC T8 PRO must only be earthed in the case of a safety class 1 luminaire.
Earthing is not required for the device to operate. Connection to earth reduces radio interference.

Ballast	Terminal	Maximum capacitance allowed			
		Cold	Hot	Cold	Hot
PC 1x... T8 PRO Ip		13, 14	15, 16	200 pF	100 pF
PC 2x... T8 PRO Ip/sl		11, 12, 13, 14	15, 16	200 pF	100 pF
PC 3/4x18 T8 PRO Ip (3x18W)		9, 10, 11, 12, 13, 14	15, 16	200 pF	100 pF
PC 3/4x18 T8 PRO Ip (4x18W)		6, 7, 9, 10, 11, 12, 13, 14	15, 16	200 pF	100 pF

To avoid the damage of the control gear, the wiring must be protected against short circuits to earth (sharp edged metal parts, metal cable clips, louver, etc.)

Installation instructions


IDC interface

- solid wire with a cross section of 0.5 mm² according to the specification from WAGO

Horizontal interface


- solid wire with a cross section of 0.5–0.75 mm² according to the specification from WAGO
- solid wire with a cross section of 1.0 mm² with an insulation diameter up to 2.5 mm
- strip 9 mm of insulation from the cables to ensure perfect operation of the push terminals
- Loosen wire through twisting and pulling

wire preparation:
0.5 – 0.75 mm²



Loosen wire through twisting and pulling

Side fixing feature



Screw M4, screw head diameter 8–10 mm

Defective lamp

If a lamp is defective, the ballast switches off and goes into standby. There is an automatic restart once the lamp has been changed.

With standard solid wire 0.5/0.75 mm² the capacitance of the lead is 30–80 pF/m. This value is influenced by the way the wiring is made.

- keep lamp wires short
- lamp connection with multi-lamp ballasts should be made with symmetrical wiring
- lamp leads marked with * should be separated as much as possible from other lamp leads

RFI

Tridonic ballasts are RFI protected in accordance with EN 55015. To operate the luminaire correctly and to minimise RFI we recommend the following instructions:

- Connection to the lamps of the “hot leads” must be kept as short as possible (marked with *)
- Mains leads should be kept apart from lamp leads (ideally 5–10 cm distance)
- Do not run mains leads adjacent to the electronic ballast
- Twist the lamp leads
- Keep the distance of lamp leads from the metal work as large as possible
- Ballast must be earthed, either over the terminal or over the mounting screw of the ballast
- Mains wiring to be twisted when through wiring
- Keep the mains leads inside the luminaire as short as possible

Isolation and electric strength testing of luminaires

Electronic devices can be damaged by high voltage. This has to be considered during the routine testing of the luminaires in production.

According to IEC 60598-1 Annex Q (informative only!) or ENEC 303-Annex A, each luminaire should be submitted to an isolation test with 500 V_{DC} for 1 second. This test voltage should be connected between the interconnected phase and neutral terminals and the earth terminal.

The isolation resistance must be at least 2 MΩ.

As an alternative, IEC 60598-1 Annex Q describes a test of the electrical strength with 1500 V_{AC} (or 1.414 x 1500 V_{DC}). To avoid damage to the electronic devices this test must not be conducted.

Additional information

Additional technical information at www.tridonic.com → Technical Data

Guarantee conditions at www.tridonic.com → Services
No warranty if device was opened.


T8 lamp information

	wattage	length
	18 W	590 mm
	36 W	1200 mm
	58 W	1500 mm

TC-L lamp information


	wattage	length
	55 W	535 mm

Wiring diagrams

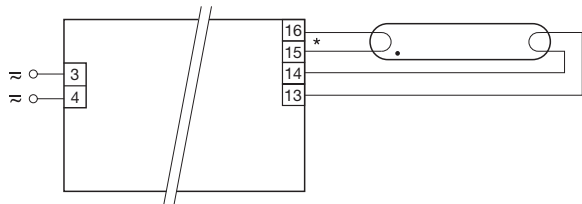


* leads 15, 16 max. 1.0 m (< 100 pF)
leads 13, 14 max. 2.0 m (< 200 pF)
For luminaires of protection class I: Earthing via ECG casing (according to IEC 60598)
For luminaires of protection class II: No earthing required

PC 1x... T8 PRO Ip

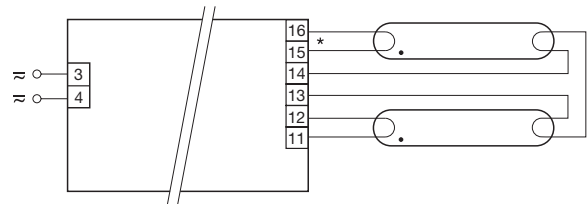


* leads 15, 16 max. 1.0 m (< 100 pF)
leads 11, 12, 13, 14 max. 2.0 m (< 200 pF)
For luminaires of protection class I: Earthing via ECG casing (according to IEC 60598)
For luminaires of protection class II: No earthing required

PC 2x... T8 PRO Ip/sl

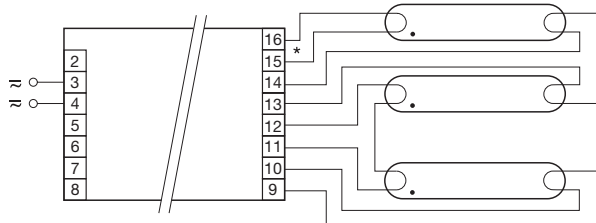

* leads 15, 16 max. 1.0 m (< 100 pF)
leads 9, 10, 11, 12, 13, 14 max. 2.0 m (< 200 pF)
For luminaires of protection class I: Earthing via ECG casing (according to IEC 60598)
For luminaires of protection class II: No earthing required

PC 3/4x18 T8 PRO Ip (3x18W)

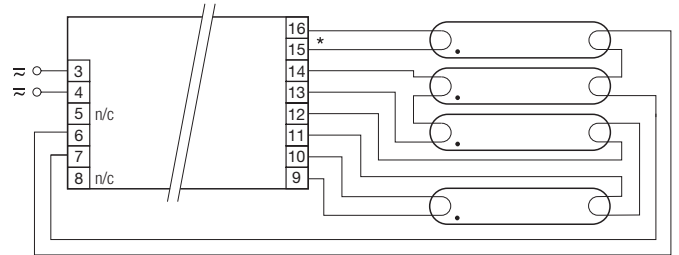

* leads 9, 10, 15, 16 max. 1.0 m (< 100 pF)
leads 6, 7, 11, 13, 14 max. 2.0 m (< 200 pF)
For luminaires of protection class I: Earthing via ECG casing (according to IEC 60598)
For luminaires of protection class II: No earthing required

PC 3/4x18 T8 PRO Ip (4x18W)