


MAZDA Floodlight

BVP007

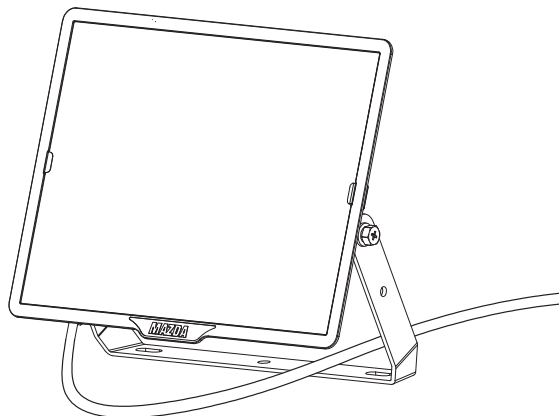

220V
240V

50Hz
60Hz



IK06

IP65





Max.
50 °C
Min.
-40 °C

Ta
25 °C





Descripción	Flux (lm)	Power (W)	Beam	m ²	kg
MAZDA BVP007 100W 4000k	8500	100		0.063	1.96
MAZDA BVP007 200W 4000k	17000	200	100°~120°	0.118	4.54

Dimensiones

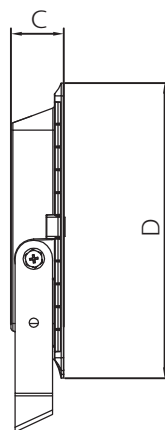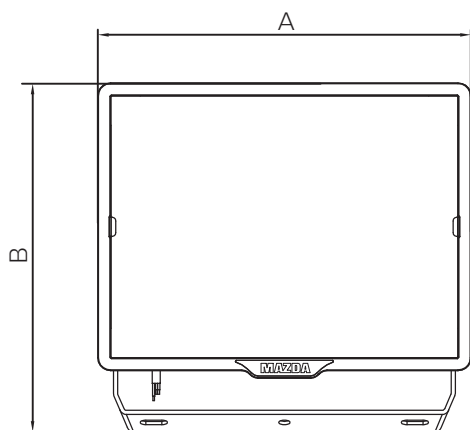

Dimensions in mm		
	100 W	200 W
A	290	395
B	280	370
C	43	60
D	226	308
E	8.5	10.5
F	8.5	10.5
G	170	260
H	200	290

Longitud de cable expuesto : 100/200W 600mm

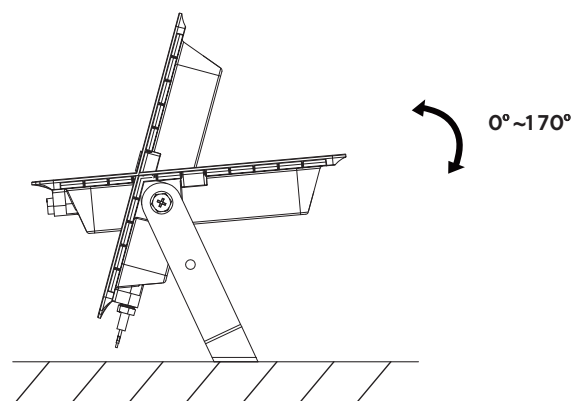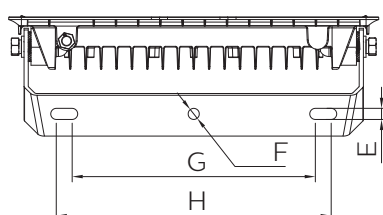



Instalar la luminaria de acuerdo a las regulaciones locales
Se recomienda utilizar una caja de pase con una protección mínima IP65 y con terminal de 3 polos. El terminal debe estar preparado para un voltage nominal del 250V




Si la luminaria se instala a una altura superior a los 3m, el uso de un segundo sistema de fijación de seguridad es necesario




Caja de pase
hermética IP65
(No provista)

Caja de pase hermética no
provista

Azul
Amarillo – Verde
Marrón



220V
240V


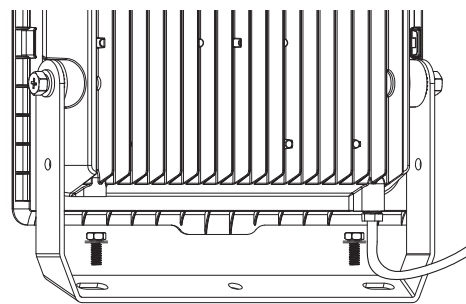


2x
100W:M8
200W:M10




1a

1b


2a

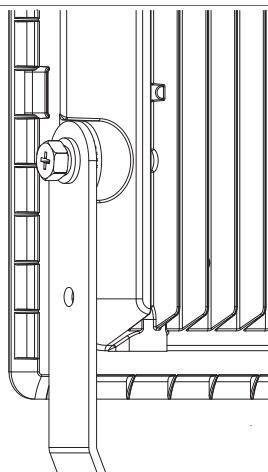

2b

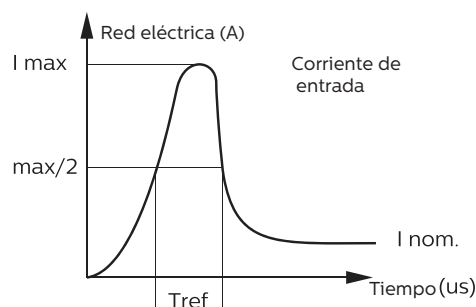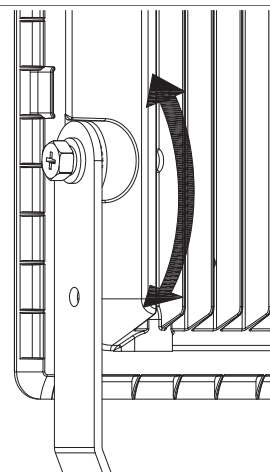

	100W	200W
Características eléctricas		
I _{max} (A)	2.48	3.28
T _{ref} (μs)	19.0	26.3
MCB	Reflectores como máximo	
B-10 A	14	7
B-16 A	22	11
C-10 A	16	8
C-16 A	26	13

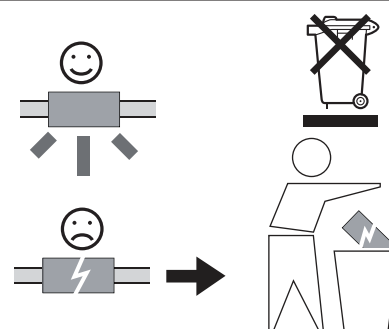

- The luminaire shall be installed or maintained by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements.
- The external flexible cable or cord of this luminaire cannot be replaced; if the cord is damaged, the luminaire shall be destroyed.
- The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced.
- Luminaire must not be used or stored in corrosive environment where hazardous materials such as sulphur, chlorine, phthalates, etc. are present.