



CIRCUIT-BREAKER,  
SIZE S00 FOR MOTOR PROTECTION,  
CLASS 10, A REL.0.14...0.2A,  
N REL.2.6A, SCREW CONNECTION,  
STANDARD BREAKING CAPACITY W. TRANSV. AUX.  
SWITCH 1NO/1NC

### General technical data:

Product brand name		SIRIUS
product designation		circuit breaker
Size of the circuit-breaker		S00
Trip class		CLASS 10
Degree of pollution		3
Installation altitude / at a height over sea level / maximum	m	2,000
Protection class IP / on the front		IP20
Ambient temperature		
• during storage	°C	-50 ... +80
• during operating	°C	-20 ... +70
• during transport	°C	80 ... -50
Resistance against shock		25g / 11 ms
Insulation voltage / rated value	V	690
Impulse voltage resistance / rated value	V	6,000
Active power loss / total / typical	W	5
Item designation		
• according to DIN 40719 extendable after IEC 204-2 / according to IEC 750		Q
• according to DIN EN 61346-2		Q

<b>Mechanical operating cycles as operating time / of the main contacts / typical</b>		100,000
<b>Design of the auxiliary switch</b>		transverse
<b>Type of the driving mechanism / motor drive</b>		No
<b>Design of the operating mechanism</b>		rocker
<b>Product function</b> <ul style="list-style-type: none"> <li>• overload protection</li> <li>• phase disturbance recognition</li> </ul>		Yes Yes
<b>Product component</b> <ul style="list-style-type: none"> <li>• auxiliary switch</li> <li>• undervoltage release mechanism</li> <li>• trip indicator</li> </ul>		Yes No Yes
<b>Product extension / optional / motor drive</b>		No

Main circuit:		
<b>Number of poles / for main current circuit</b>		3
<b>type of voltage</b>		AC/DC
<b>Operating voltage / at AC-3 / rated value / maximum</b>	V	690
<b>Operating current / at AC-3 / at 400 V / rated value</b>	A	0.2
<b>Service power / at AC-3</b> <ul style="list-style-type: none"> <li>• at 400 V / rated value</li> </ul>	kW	0.06
<b>Frequency of operation / at AC-3 / according to IEC 60947-6-2 / maximum</b>	1/h	15
<b>Arrangement of electrical connectors / for main current circuit</b>		front side
<b>Adjustable response current</b> <ul style="list-style-type: none"> <li>• of the non-delayed short-circuit release</li> </ul>	A	2.6 ... 2.6
<b>Adjustable response current</b> <ul style="list-style-type: none"> <li>• of the current-dependent overload release</li> </ul>	A	0.14 ... 0.2
<b>Continuous current / rated value</b>	A	0.2
<b>Product extension / auxiliary switch</b>		Yes

Auxiliary circuit:		
<b>Number of NC contacts / for auxiliary contacts / instantaneous switching</b>		1
<b>Number of NO contacts / for auxiliary contacts / instantaneous switching</b>		1
<b>Number of change-over switches / for auxiliary contacts</b>		0
<b>Operating current / of the auxiliary contacts</b> <ul style="list-style-type: none"> <li>• at AC-15</li> <li>• at 24 V</li> <li>• at 230 V</li> <li>• at DC-13</li> </ul>	A  A	2  0.5

- at 24 V
- at 60 V

A	1
A	0.15

#### Inputs/ Outputs:

##### Number of digital inputs

0

#### Short-circuit:

##### Breaking capacity limit short-circuit current (I<sub>cu</sub>)

- at 400 V / rated value
- at 500 V / rated value
- at 690 V / rated value

kA	100
kA	100
kA	100

##### Design of the electrical connection / for auxiliary and control current circuit

screw-type terminals

##### Design of the overcurrent release and short-circuit release

thermomagnetic

#### Installation/mounting/dimensions:

##### Built in orientation

any

##### Type of mounting

screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022

##### Width

mm 45

##### Height

mm 90

##### Depth

mm 81

##### Distance, to be maintained, to the ranks assembly

- backwards
- sideways

mm	0
mm	0

##### Product function / removable terminal for auxiliary and control circuit

No

#### Connections:

##### Design of the electrical connection

- for main current circuit

screw-type terminals

##### Type of the connectable conductor cross-section

- for main contacts
  - solid
  - stranded
  - finely stranded
    - with conductor end processing
- for AWG conductors / for main contacts
- for auxiliary contacts
  - solid
  - finely stranded / with conductor end processing
- for AWG conductors / for auxiliary contacts

2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )
2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )
2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )
2x (18 ... 14)
2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )
2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )
2x (18 ... 14)

<b>Conductor cross section that can be connected / for main contacts</b> <ul style="list-style-type: none"> <li>• solid</li> <li>• stranded</li> <li>• stranded wire <ul style="list-style-type: none"> <li>• with conductor end processing</li> </ul> </li> </ul>	mm <sup>2</sup>	0.5 ... 2.5
	mm <sup>2</sup>	0.5 ... 2.5
	mm <sup>2</sup>	0.5 ... 2.5
<b>AWG number / as coded connectable conductor cross-section</b> <ul style="list-style-type: none"> <li>• for main contacts</li> </ul>		18 ... 14
<b>Conductor cross-section that can be connected / for auxiliary contact</b> <ul style="list-style-type: none"> <li>• solid</li> <li>• stranded wire <ul style="list-style-type: none"> <li>• with conductor end processing</li> </ul> </li> </ul>	mm <sup>2</sup>	0.5 ... 2.5
	mm <sup>2</sup>	0.5 ... 2.5
<b>AWG number / as coded connectable conductor cross-section</b> <ul style="list-style-type: none"> <li>• for auxiliary contact</li> </ul>		18 ... 14

#### Certificates/approvals:

##### General Product Approval

For use in  
hazardous  
locations



CQC



CSA

[KETI](#)

[ROSTEST](#)



UL

[DEKRA EXAM,](#)  
[DMT](#)

##### Test Certificates

[Manufacturer](#)

##### Shipping Approval



ABS



BUREAU  
VERITAS



DNV



GL



LRS



PRS

##### Shipping Approval

other



RINA



RMRS

[Manufacturer](#)

[other](#)

#### Safety:

Protection against electrical shock

finger-safe


#### Further information:


Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

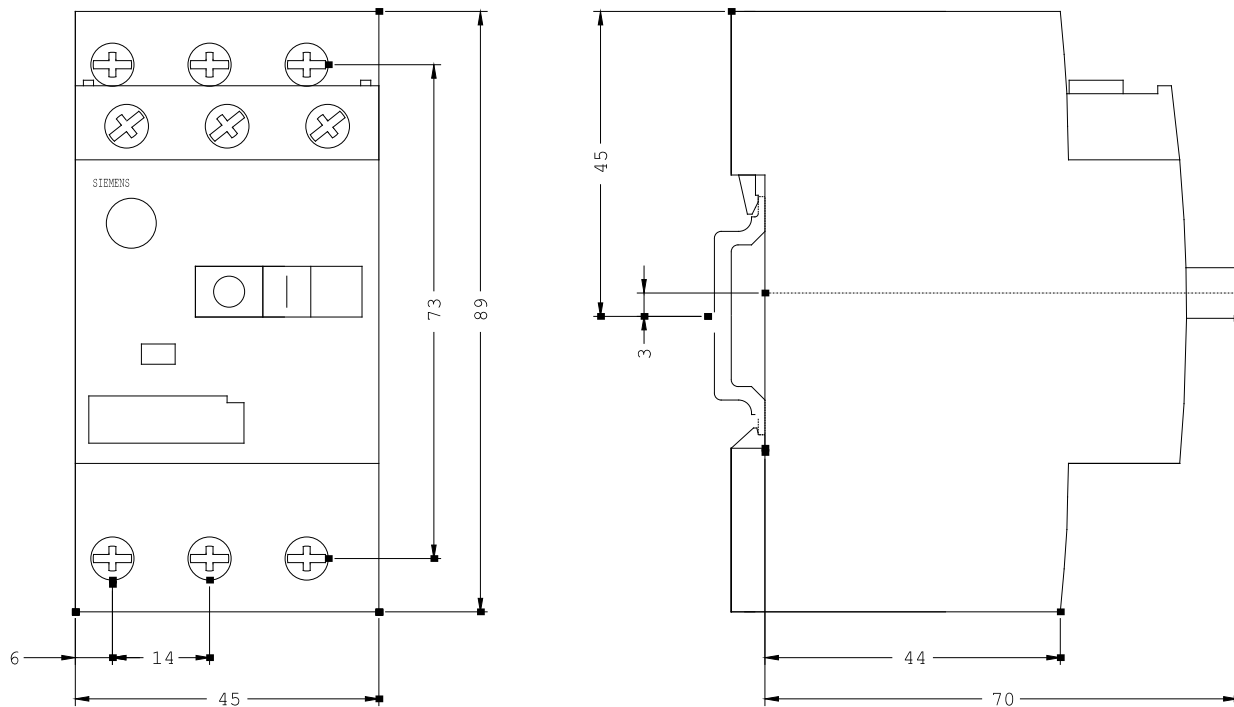

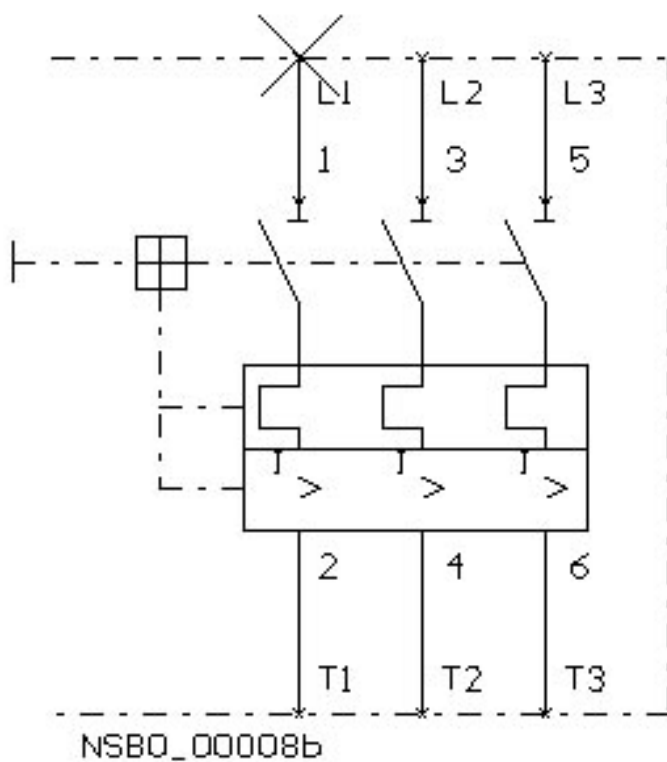

last change:

Dec 24, 2011