

3-PHASE BUSBAR WITH INFEEED RIGHT,  
FOR 2 CIRCUIT-BREAKERS, SIZE S00 UND S0

### General technical data:

Product brand name		SIRIUS
product designation		3-phase busbars with infeed
Size of the circuit-breaker		S00, S0
Design of the product		for 2 switches with infeed on the right
Acceptability for application		circuit-breakers 3RV2

### Installation/mounting/dimensions:

Built in orientation		any
Type of mounting		snap-on fastening on 35 mm standard rail
Width	mm	110
Height	mm	129
Depth	mm	86.5
Distance, to be maintained, conductive elements		
• upwards	mm	10
• backwards	mm	0
• sideways	mm	0
Distance, to be maintained, to earthed part		
• upwards	mm	10
• backwards	mm	0
• sideways	mm	0

**Distance, to be maintained, to the ranks assembly**

- upwards
- backwards
- sideways

mm	10
mm	0
mm	0

**Certificates/approvals:****Verification of suitability**

CE / UL / CSA / CCC

**General Product Approval****Test Certificates**

CSA



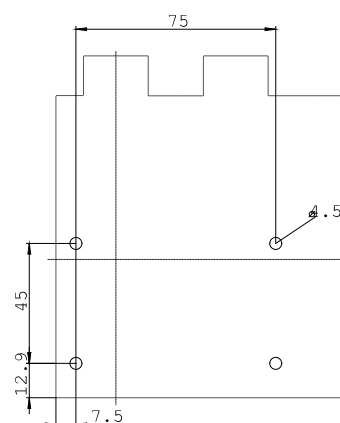
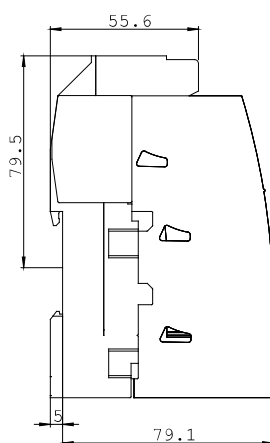
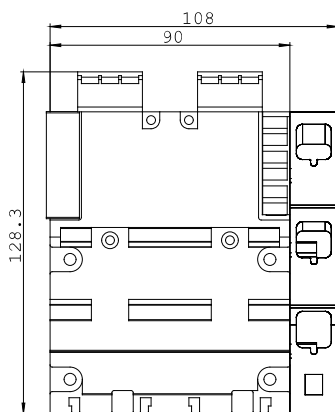
UL

[Manufacturer](#)**Shipping Approval****other**[ABS](#)

GL

[PRS](#)

RINA

[Manufacturer](#)[other](#)**Further information:****Information- and Downloadcenter (Catalogs, Brochures,...)**<http://www.siemens.com/industrial-controls/catalogs>**Industry Mall (Online ordering system)**<http://www.siemens.com/industrial-controls/mall>**CAX-Online-Generator**<http://www.siemens.com/cax>**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**<http://support.automation.siemens.com/WW/view/en/3RV2917-1E/all>**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3RV2917-1E](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RV2917-1E)

last change:

Aug 19, 2011