# **SIEMENS**

Product data sheet 3RV2011-0GA10



CIRCUIT-BREAKER SZ S00, FOR MOTOR PROTECTION, CLASS 10, A-REL. 0.45...0.63A, N-RELEASE8.2A SCREW CONNECTION, STANDARD SW. CAPACITY

| General technical data:  |    |                      |
|--|----|----------------------|
| Product brand name   |    | SIRIUS               |
| product designation  |    | 3RV2 circuit breaker |
| Size of the circuit-breaker  |    | S00                  |
| Trip class   |    | CLASS 10             |
| Protection class IP / on the front   |    | IP20                 |
| Degree of pollution  |    | 3                    |
| Installation altitude / at a height over sea level / maximum                                     | m  | 2,000                |
| Ambient temperature  |    |                      |
| during storage   | °C | -50 80               |
| during operating   | °C | -20 60               |
| during transport   | °C | -50 80               |
| Resistance against shock   |    | 25g / 11 ms          |
| Impulse voltage resistance / rated value   | kV | 6                    |
| Insulation voltage / rated value   | V  | 690                  |
| Active power loss / total / typical  | W  | 5                    |
| Item designation   |    |                      |
| <ul> <li>according to DIN 40719 extendable after IEC 204-2 / according<br/>to IEC 750</li> </ul> |    | F                    |
| <ul> <li>according to DIN EN 61346-2</li> </ul>  |    | F                    |

| Mechanical operating cycles as operating time                            |     |                 |
|--|-----|-----------------|
| of the main contacts / typical   |     | 100,000         |
| of the auxiliary contacts / typical                                      |     | 100,000         |
| Type of the driving mechanism / motor drive                              |     | No              |
| Design of the operating mechanism  |     | selector switch |
| Product function   |     |                 |
| overload protection  |     | Yes             |
| phase disturbance recognition  |     | Yes             |
| Product component  |     |                 |
| auxiliary switch   |     | No              |
| undervoltage release mechanism   |     | No              |
| • trip indicator   |     | No              |
| Product extension / optional / motor drive                               |     | No              |
| Main circuit:  |     |                 |
| Number of poles / for main current circuit                               |     | 3               |
| Operating voltage / at AC-3 / rated value / maximum                      | V   | 690             |
| Operating current / at AC-3 / at 400 V / rated value                     | Α   | 0.6             |
| Service power / at AC-3  |     |                 |
| • at 400 V / rated value   | W   | 180             |
| • at 500 V / rated value   | W   | 180             |
| • at 690 V / rated value   | W   | 250             |
| Frequency of operation / at AC-3 / according to IEC 60947-6-2 / maximum  | 1/h | 15              |
| Arrangement of electrical connectors / for main current circuit          |     | Top and bottom  |
| Adjustable response current  |     |                 |
| of the non-delayed short-circuit release                                 | Α   | 8.2 8.2         |
| of the current-dependent overload release                                | Α   | 0.45 0.63       |
| Service power / at AC-3 / at 230 V / rated value                         | W   | 90              |
| Continuous current / rated value   | А   | 0.63            |
| Auxiliary circuit:   |     |                 |
| Product extension / auxiliary switch                                     |     | Yes             |
| Number of NC contacts / for auxiliary contacts / instantaneous switching |     | 0               |
| Number of NO contacts / for auxiliary contacts / instantaneous switching |     | 0               |
| Number of change-over switches / for auxiliary contacts                  |     | 0               |
| Inputs/ Outputs:   |     |                 |
| Number of digital inputs   |     | 0               |

| Short-circuit:  |   |                |
|---|---|----------------|
| Breaking capacity limit short-circuit current (lcu)         |   |                |
| • at 400 V / rated value                                    | Α | 100,000        |
| • at 500 V / rated value                                    | Α | 100,000        |
| • at 690 V / rated value                                    | Α | 100,000        |
| Design of the overcurrent release and short-circuit release |   | thermomagnetic |

| Installation/mounting/dimensions:                 |    |  |
|---|----|--|
| Built in orientation                              |    | any  |
| Type of mounting                                  |    | screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 |
| Width   | mm | 45   |
| Height  | mm | 97   |
| Depth   | mm | 91   |
| Distance, to be maintained, to the ranks assembly |    |  |
| • forwards  | mm | 0  |
| • backwards                                       | mm | 0  |
| • upwards   | mm | 50   |
| • downwards                                       | mm | 50   |
| • sidewards                                       | mm | 0  |
| Distance, to be maintained, to earthed part       |    |  |
| • forwards  | mm | 0  |
| • backwards                                       | mm | 0  |
| • upwards   | mm | 50   |
| • sidewards                                       | mm | 30   |
| • downwards                                       | mm | 50   |
| Distance, to be maintained, conductive elements   |    |  |
| • forwards  | mm | 0  |
| • backwards                                       | mm | 0  |
| • upwards   | mm | 50   |
| • downwards                                       | mm | 50   |
| • sidewards                                       | mm | 30   |

| Connections:   |                      |
|--|----------------------|
| Product function                                       |                      |
| removable terminal for main circuit                    | No                   |
| • removable terminal for auxiliary and control circuit | No                   |
| Design of the electrical connection                    |                      |
| for main current circuit                               | screw-type terminals |
| Type of the connectable conductor cross-section        |                      |
| for main contacts                                      |                      |

• solid

stranded

• finely stranded

• with conductor end processing

• for AWG conductors / for main contacts

2x (0.75 ... 2.5 mm²), 2x (1 ... 4 mm²)

2x (0.75 ... 2.5 mm²), 2x 4 mm²

2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²)

2x (18 ... 14), 2x 12

# Certificates/approvals:

## Verification of suitability

• für Staubexplosionsschutz für Zone 21/22

• for gas explosion protection for zone 1/2

CE / UL / CSA

no

no

# **General Product Approval**





**ROSTEST** 



For use in hazardous locations

DEKRA EXAM,

## **Test Certificates**

Manufacturer

other

## **Shipping Approval**













other

Manufacturer

other



| Safety:  |     |             |
|--|-----|-------------|
| B10 value / with high demand rate                                |     |             |
| according to SN 31920  |     | 50,000      |
| T1 value / for proof test interval or service life               |     |             |
| according to IEC 61508   | а   | 10          |
| Failure rate (FIT value) / with low demand rate                  |     |             |
| according to SN 31920  | FIT | 50          |
| Proportion of dangerous failures                                 |     |             |
| <ul> <li>with low demand rate / according to SN 31920</li> </ul> | %   | 40          |
| with high demand rate / according to SN 31920                    | %   | 40          |
| Protection against electrical shock                              |     | finger-safe |

# Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/industrial-controls/catalogs

## Industry Mall (Online ordering system)

http://www.siemens.com/industrial-controls/mall

## **CAx-Online-Generator**


http://www.siemens.com/cax


# Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


http://support.automation.siemens.com/WW/view/en/3RV2011-0GA10/all

# Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax\_en.aspx?mlfb=3RV2011-0GA10

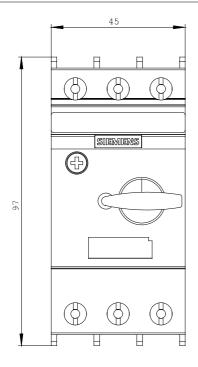

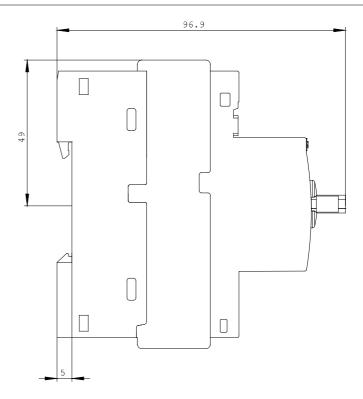

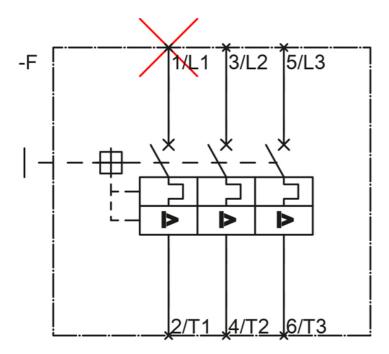

last change: Oct 24, 2011