SIEMENS

Product data sheet 3RV2021-4BA10



CIRCUIT-BREAKER SZ S0, FOR MOTOR PROTECTION, CLASS 10, A-RELEASE 14...20A, N-RELEASE 260A, SCREW CONNECTION, STANDARD SW. CAPACITY,

General technical data:			
Product brand name		SIRIUS	
product designation		3RV2 circuit breaker	
Size of the circuit-breaker		S0	
Trip class		CLASS 10	
Protection class IP / on the front		IP20	
Degree of pollution		3	
Installation altitude / at a height over sea level / maximum	m	2,000	
Ambient temperature			
during storage	°C	-50 80	
during operating	°C	-20 60	
during transport	°C	-50 80	
Resistance against shock		25g / 11 ms	
Impulse voltage resistance / rated value	kV	6	
Insulation voltage / rated value	V	690	
Active power loss / total / typical	W	9.6	
Item designation			
 according to DIN 40719 extendable after IEC 204-2 / according to IEC 750 		F	
according to DIN EN 61346-2		F	

of the main contacts / typical of the auxiliary contacts / typical 100,000 Type of the driving mechanism / motor drive Design of the operating mechanism Product function overload protection phase disturbance recognition Product component auxiliary switch undervoltage release mechanism trip indicator Product extension / optional / motor drive No Main circuit: Number of poles / for main current circuit Operating voltage / at AC-3 / rated value / maximum Operating current / at AC-3 / at 400 V / rated value at 690 V	Mechanical operating cycles as operating time		
Type of the driving mechanism / motor drive Design of the operating mechanism Product function • overload protection • phase disturbance recognition Product component • auxiliary switch • undervoltage release mechanism • trip indicator Product extension / optional / motor drive No Main circuit: Number of poles / for main current circuit Operating voltage / at AC-3 / rated value / maximum Operating current / at AC-3 / at 400 V / rated value at 400 V / rated value • at 500 V / rated value • at 690 V / rated value • at 6	of the main contacts / typical		100,000
Design of the operating mechanism Product function overload protection phase disturbance recognition Product component auxiliary switch oundervoltage release mechanism outpin indicator No Product extension / optional / motor drive No Main circuit: Number of poles / for main current circuit Operating voltage / at AC-3 / rated value / maximum Operating current / at AC-3 / at 400 V / rated value at 400 V / rated value viated value via	of the auxiliary contacts / typical		100,000
Product function • overload protection • phase disturbance recognition Product component • auxiliary switch • undervoltage release mechanism • trip indicator Product extension / optional / motor drive Main circuit: Number of poles / for main current circuit Operating voltage / at AC-3 / rated value / maximum V 690 Operating current / at AC-3 / at 400 V / rated value • at 400 V / rated value • at 500 V / rated value • at 500 V / rated value **Top and bottom Arrangement of electrical connectors / for main current circuit Adjustable response current • of the non-delayed short-circuit release **Yes **No **No **No ***No **No	Type of the driving mechanism / motor drive		No
• overload protection • phase disturbance recognition Product component • auxiliary switch • undervoltage release mechanism • trip indicator Product extension / optional / motor drive Main circuit: Number of poles / for main current circuit Operating voltage / at AC-3 / rated value / maximum Operating current / at AC-3 / at 400 V / rated value • at 400 V / rated value • at 500 V / rated value • at 690 V / rat	Design of the operating mechanism		selector switch
Product component auxiliary switch undervoltage release mechanism trip indicator Product extension / optional / motor drive No Main circuit: Number of poles / for main current circuit Operating voltage / at AC-3 / rated value / maximum Operating current / at AC-3 / at 400 V / rated value at 400 V / rated value at 500 V / rated value valu	Product function		
Product component	overload protection		Yes
auxiliary switch undervoltage release mechanism trip indicator Product extension / optional / motor drive Main circuit: Number of poles / for main current circuit Operating voltage / at AC-3 / rated value / maximum V 690 Operating current / at AC-3 / at 400 V / rated value A 15.5 Service power / at AC-3 at 400 V / rated value W 7,500 at 500 V / rated value W 11,000 at 690 V / rated value W 15,000 Frequency of operation / at AC-3 / according to IEC 60947-6-2 / maximum Arrangement of electrical connectors / for main current circuit Adjustable response current of the non-delayed short-circuit release A 260 260	phase disturbance recognition		Yes
• undervoltage release mechanism • trip indicator Product extension / optional / motor drive No Main circuit: Number of poles / for main current circuit Operating voltage / at AC-3 / rated value / maximum V 690 Operating current / at AC-3 / at 400 V / rated value A 15.5 Service power / at AC-3 • at 400 V / rated value • at 500 V / rated value • at 690 V / rated value Arrangement of electrical connectors / for main current circuit Adjustable response current • of the non-delayed short-circuit release A 260 260	Product component		
• trip indicator Product extension / optional / motor drive No Main circuit: Number of poles / for main current circuit Operating voltage / at AC-3 / rated value / maximum V 690 Operating current / at AC-3 / at 400 V / rated value A 15.5 Service power / at AC-3 • at 400 V / rated value • at 500 V / rated value • at 690 V / rated value Trop and bottom Adjustable response current • of the non-delayed short-circuit release A 260 260	auxiliary switch		No
Product extension / optional / motor drive Main circuit: Number of poles / for main current circuit Operating voltage / at AC-3 / rated value / maximum V 690 Operating current / at AC-3 / at 400 V / rated value A 15.5 Service power / at AC-3 • at 400 V / rated value • at 500 V / rated value • at 690 V / rated value • at 690 V / rated value Trequency of operation / at AC-3 / according to IEC 60947-6-2 / maximum Arrangement of electrical connectors / for main current circuit Adjustable response current • of the non-delayed short-circuit release A 260 260	undervoltage release mechanism		No
Main circuit: Number of poles / for main current circuit Operating voltage / at AC-3 / rated value / maximum V 690 Operating current / at AC-3 / at 400 V / rated value A 15.5 Service power / at AC-3 • at 400 V / rated value • at 500 V / rated value • at 690 V / rated value W 11,000 • at 690 V / rated value W 15,000 Frequency of operation / at AC-3 / according to IEC 60947-6-2 / maximum Arrangement of electrical connectors / for main current circuit Adjustable response current • of the non-delayed short-circuit release A 260 260	trip indicator		No
Number of poles / for main current circuit Operating voltage / at AC-3 / rated value / maximum V 690 Operating current / at AC-3 / at 400 V / rated value A 15.5 Service power / at AC-3 • at 400 V / rated value • at 500 V / rated value • at 690 V / rated value W 11,000 • at 690 V / rated value W 15,000 Frequency of operation / at AC-3 / according to IEC 60947-6-2 / maximum Arrangement of electrical connectors / for main current circuit Adjustable response current • of the non-delayed short-circuit release A 260 260	Product extension / optional / motor drive		No
Operating voltage / at AC-3 / rated value / maximum V 690 Operating current / at AC-3 / at 400 V / rated value A 15.5 Service power / at AC-3 • at 400 V / rated value • at 500 V / rated value • at 690 V / rated value W 11,000 • at 690 V / rated value W 15,000 Frequency of operation / at AC-3 / according to IEC 60947-6-2 / maximum Arrangement of electrical connectors / for main current circuit Adjustable response current • of the non-delayed short-circuit release A 260 260	Main circuit:		
Operating current / at AC-3 / at 400 V / rated value Service power / at AC-3 • at 400 V / rated value • at 500 V / rated value • at 690 V / rated value W 15,000 Frequency of operation / at AC-3 / according to IEC 60947-6-2 / maximum Arrangement of electrical connectors / for main current circuit Adjustable response current • of the non-delayed short-circuit release A 260 260	Number of poles / for main current circuit		3
Service power / at AC-3 • at 400 V / rated value • at 500 V / rated value • at 690 V / rated value W 11,000 • at 690 V / rated value W 15,000 Frequency of operation / at AC-3 / according to IEC 60947-6-2 / maximum Arrangement of electrical connectors / for main current circuit Adjustable response current • of the non-delayed short-circuit release A 260 260	Operating voltage / at AC-3 / rated value / maximum	٧	690
 at 400 V / rated value at 500 V / rated value at 690 V / rated value W 11,000 Trequency of operation / at AC-3 / according to IEC 60947-6-2 / maximum Arrangement of electrical connectors / for main current circuit Adjustable response current of the non-delayed short-circuit release A 260 260 	Operating current / at AC-3 / at 400 V / rated value	Α	15.5
 at 500 V / rated value at 690 V / rated value W 15,000 Frequency of operation / at AC-3 / according to IEC 60947-6-2 / maximum Arrangement of electrical connectors / for main current circuit Adjustable response current of the non-delayed short-circuit release A 260 260 	Service power / at AC-3		
• at 690 V / rated value W 15,000 Frequency of operation / at AC-3 / according to IEC 60947-6-2 / maximum Arrangement of electrical connectors / for main current circuit Adjustable response current • of the non-delayed short-circuit release W 15,000 Top and bottom Adjustable response current A 260 260	• at 400 V / rated value	W	7,500
Frequency of operation / at AC-3 / according to IEC 60947-6-2 / maximum Arrangement of electrical connectors / for main current circuit Adjustable response current • of the non-delayed short-circuit release A 260 260	• at 500 V / rated value	W	11,000
maximum Arrangement of electrical connectors / for main current circuit Adjustable response current • of the non-delayed short-circuit release A 260 260	• at 690 V / rated value	W	15,000
Adjustable response current • of the non-delayed short-circuit release A 260 260		1/h	15
• of the non-delayed short-circuit release A 260 260	Arrangement of electrical connectors / for main current circuit		Top and bottom
	Adjustable response current		
• of the current-dependent overload release	of the non-delayed short-circuit release	Α	260 260
of the darrent depondent eveneds to lease	of the current-dependent overload release	Α	14 20
Service power / at AC-3 / at 230 V / rated value W 5,500	Service power / at AC-3 / at 230 V / rated value	W	5,500
Continuous current / rated value A 20	Continuous current / rated value	Α	20
Auxiliary circuit:	Auxiliary circuit:		
Product extension / auxiliary switch Yes	Product extension / auxiliary switch		Yes
Number of NC contacts / for auxiliary contacts / instantaneous switching 0			0
Number of NO contacts / for auxiliary contacts / instantaneous switching 0			0
Number of change-over switches / for auxiliary contacts 0	Number of change-over switches / for auxiliary contacts		0
Inputs/ Outputs:	Inputs/ Outputs:		
Number of digital inputs 0	Number of digital inputs		0

Short-circuit:				
Breaking capacity limit short-circuit current (lcu)				
• at 400 V / rated value	Α	55,000		
• at 500 V / rated value	Α	10,000		
• at 690 V / rated value	Α	4,000		
Design of the overcurrent release and short-circuit release		thermomagnetic		

Installation/mounting/dimensions:			
Built in orientation		any	
Type of mounting		screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715	
Width	mm	45	
Height	mm	97	
Depth	mm	91	
Distance, to be maintained, to the ranks assembly			
• forwards	mm	0	
• backwards	mm	0	
• upwards	mm	50	
• downwards	mm	50	
• sidewards	mm	0	
Distance, to be maintained, to earthed part			
• forwards	mm	0	
• backwards	mm	0	
• upwards	mm	50	
• sidewards	mm	30	
• downwards	mm	50	
Distance, to be maintained, conductive elements			
• forwards	mm	0	
• backwards	mm	0	
• upwards	mm	50	
• downwards	mm	50	
• sidewards	mm	30	

Connections:			
Product function			
• removable terminal for main circuit	No		
• removable terminal for auxiliary and control circuit	No		
Design of the electrical connection			
for main current circuit	screw-type terminals		
Type of the connectable conductor cross-section			
• for main contacts			

• solid	2x (1 2.5 mm²), 2x (2.5 10 mm²)
• stranded	2x (1 2.5 mm²), 2x (2.5 10 mm²)
• finely stranded	
with conductor end processing	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²

C4161	20122	1		
Certifi	cates/	app	prova	IIS:

Verification of suitability

• für Staubexplosionsschutz für Zone 21/22

• for AWG conductors / for main contacts

• for gas explosion protection for zone 1/2

CE/UL/CSA

2x (16 ... 12), 2x (14 ... 8)

no

no

General Product Approval





ROSTEST



For use in hazardous locations

 $\frac{\mathsf{DEKRA}\;\mathsf{EXAM},}{\mathsf{DMT}}$

Test Certificates

Manufacturer

other

Shipping Approval













other

Manufacturer

other



UL/CSA ratings		
yielded mechanical performance (hp)		
for single-phase squirrel cage motors		
• at 110/120 V / rated value	hp	1.5
• at 230 V / rated value	hp	3
for three-phase squirrel cage motors		
• at 200/208 V / rated value	hp	5
• at 220/230 V / rated value	hp	5
• at 460/480 V / rated value	hp	10
Operating current (FLA) / for three-phase squirrel cage motors		
• at 480 V / rated value	А	14

Safety:	
B10 value / with high demand rate	
• according to SN 31920	50,000
T1 value / for proof test interval or service life	

according to IEC 61508	а	10
Failure rate (FIT value) / with low demand rate		
according to SN 31920	FIT	50
Proportion of dangerous failures		
• with low demand rate / according to SN 31920	%	40
• with high demand rate / according to SN 31920	%	40
Protection against electrical shock		finger-safe

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)

http://www.siemens.com/industrial-controls/mall

CAx-Online-Generator


http://www.siemens.com/cax


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


http://support.automation.siemens.com/WW/view/en/3RV2021-4BA10/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

 $\underline{\text{http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RV2021-4BA10}$

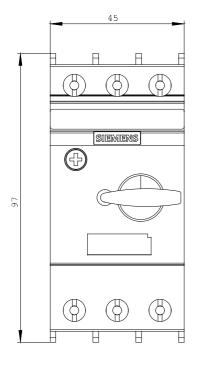

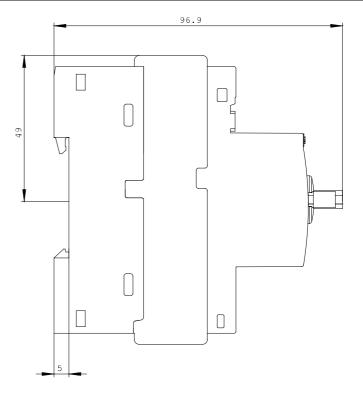

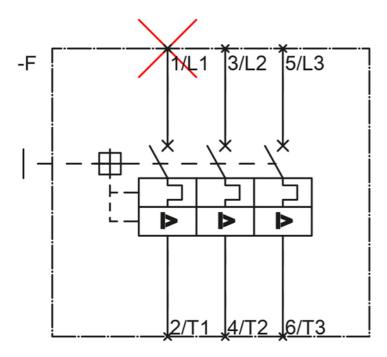

last change: Oct 24, 2011