# **SIEMENS**

## Data sheet

## 3RV2021-0HA15

Circuit breaker size S0 for motor protection, CLASS 10 A-release 0.55...0.8 A N-release 10 A screw terminal Standard switching capacity with transverse auxiliary switches 1 NO+1 NC



Figure similar

Product brand name	SIRIUS
Product designation	Circuit breaker
Design of the product	For motor protection
Product type designation	3RV2
General technical data	
Size of the circuit-breaker	S0
Size of contactor can be combined company-specific	S00, S0
Product extension	
Auxiliary switch	Yes
Power loss [W] total typical	6 W
Insulation voltage with degree of pollution 3 rated value	690 V
Surge voltage resistance rated value	6 kV
maximum permissible voltage for safe isolation	
<ul> <li>in networks with grounded star point between main and auxiliary circuit</li> </ul>	400 V
<ul> <li>in networks with grounded star point between main and auxiliary circuit</li> </ul>	400 V

Protection class IP	
• on the front	IP20
• of the terminal	IP20
Shock resistance	
• acc. to IEC 60068-2-27	25g / 11 ms
Mechanical service life (switching cycles)	
<ul> <li>of the main contacts typical</li> </ul>	100 000
<ul> <li>of auxiliary contacts typical</li> </ul>	100 000
Electrical endurance (switching cycles)	
• typical	100 000
Type of protection	Increased safety
Certificate of suitability relating to ATEX	on request
Protection against electrical shock	finger-safe
Equipment marking acc. to DIN EN 81346-2	Q
Ambient conditions	
Installation altitude at height above sea level	
• maximum	2 000 m
Ambient temperature	
<ul> <li>during operation</li> </ul>	-20 +60 °C
• during storage	-50 +80 °C
during transport	-50 +80 °C
Temperature compensation	-20 +60 °C
Relative humidity during operation	10 95 %
Main circuit	2
Number of poles for main current circuit Adjustable pick-up value current of the current-	3 0.55 0.8 A
dependent overload release	0.00 0.0 A
Operating voltage	
rated value	690 V
<ul> <li>at AC-3 rated value maximum</li> </ul>	690 V
Operating frequency rated value	50 60 Hz
Operating current rated value	0.8 A
Operating current	
● at AC-3	
— at 400 V rated value	
	0.8 A
Operating power	0.8 A
Operating power • at AC-3	0.8 A
	0.8 A 120 W
• at AC-3	
• at AC-3 — at 230 V rated value	120 W
• at AC-3 — at 230 V rated value — at 400 V rated value	120 W 180 W


• at AC-3 maximum

Auxiliary circuit	
Design of the auxiliary switch	transverse
Number of NC contacts	
<ul> <li>for auxiliary contacts</li> </ul>	1
Number of NO contacts	
<ul> <li>for auxiliary contacts</li> </ul>	1
Number of CO contacts	
<ul> <li>for auxiliary contacts</li> </ul>	0
Operating current of auxiliary contacts at AC-15	
• at 24 V	2 A
• at 120 V	0.5 A
• at 125 V	0.5 A
• at 230 V	0.5 A
Operating current of auxiliary contacts at DC-13	
• at 24 V	1 A
• at 60 V	0.15 A
Protective and monitoring functions	
Product function	
<ul> <li>Ground fault detection</li> </ul>	No
<ul> <li>Phase failure detection</li> </ul>	Yes
Tala alara	01 400 40

<ul> <li>Phase failure detection</li> </ul>	Yes
Trip class	CLASS 10
Design of the overload release	thermal
Operational short-circuit current breaking capacity (Ics) at AC	
• at 240 V rated value	100 kA
• at 400 V rated value	100 kA
• at 500 V rated value	100 kA
• at 690 V rated value	100 kA
Maximum short-circuit current breaking capacity (Icu)	
<ul> <li>at AC at 240 V rated value</li> </ul>	100 kA
<ul> <li>at AC at 400 V rated value</li> </ul>	100 kA
<ul> <li>at AC at 500 V rated value</li> </ul>	100 kA
• at AC at 690 V rated value	100 kA
Breaking capacity short-circuit current (Icn)	
<ul> <li>at 1 current path at DC at 150 V rated value</li> </ul>	10 kA
<ul> <li>with 2 current paths in series at DC at 300 V rated value</li> </ul>	10 kA
<ul> <li>with 3 current paths in series at DC at 450 V rated value</li> </ul>	10 kA
Response value current	
• of instantaneous short-circuit trip unit	10 A

UL/CSA ratings		
Full-load current (FLA) for three-phase AC motor		
• at 480 V rated value	0.8 A	
• at 600 V rated value	0.8 A	
Contact rating of auxiliary contacts according to UL	C300 / R300	
Short-circuit protection		
Product function Short circuit protection	Yes	
Design of the short-circuit trip	magnetic	
Design of the fuse link		
<ul> <li>for short-circuit protection of the auxiliary switch required</li> </ul>	Fuse gL/gG: 10 A, miniature circuit breaker C 6 A (short-circuit current Ik < 400 A)	
Installation/ mounting/ dimensions		
Mounting position	any	
Mounting type	screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715	
Height	97 mm	
Width	45 mm	
Depth	96 mm	
Required spacing		
<ul> <li>with side-by-side mounting</li> </ul>		
— forwards	0 mm	
— Backwards	0 mm	
— upwards	50 mm	
— downwards	50 mm	
— at the side	0 mm	
<ul> <li>for grounded parts</li> </ul>		
— forwards	0 mm	
— Backwards	0 mm	
— upwards	50 mm	
— at the side	30 mm	
— downwards	50 mm	
• for live parts		
— forwards	0 mm	
— Backwards	0 mm	
— upwards	50 mm	
— downwards	50 mm	
— at the side	30 mm	
Connections/Terminals		
Product function		
<ul> <li>removable terminal for auxiliary and control circuit</li> </ul>	No	

Type of electrical connection	
for main current circuit	screw-type terminals
<ul> <li>for auxiliary and control current circuit</li> </ul>	screw-type terminals
Arrangement of electrical connectors for main current circuit	Top and bottom
Type of connectable conductor cross-sections	
• for main contacts	
— single or multi-stranded	2x (1 2,5 mm²), 2x (2,5 10 mm²)
<ul> <li>finely stranded with core end processing</li> </ul>	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²
• at AWG conductors for main contacts	2x (16 12), 2x (14 8)
Type of connectable conductor cross-sections	
<ul> <li>for auxiliary contacts</li> </ul>	
— single or multi-stranded	2x (0,5 1,5 mm²), 2x (0,75 2,5 mm²)
— finely stranded with core end processing	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
<ul> <li>at AWG conductors for auxiliary contacts</li> </ul>	2x (20 16), 2x (18 14)
Tightening torque	
<ul> <li>for main contacts with screw-type terminals</li> </ul>	2 2.5 N·m
<ul> <li>for auxiliary contacts with screw-type terminals</li> </ul>	0.8 1.2 N·m
Design of screwdriver shaft	Diameter 5 to 6 mm
Size of the screwdriver tip	Pozidriv 2
Design of the thread of the connection screw	
<ul> <li>for main contacts</li> </ul>	M4
<ul> <li>of the auxiliary and control contacts</li> </ul>	M3
Safety related data	
B10 value	
• with high demand rate acc. to SN 31920	5 000
Proportion of dangerous failures	
• with low demand rate acc. to SN 31920	50 %
• with high demand rate acc. to SN 31920	50 %
Failure rate [FIT]	
• with low demand rate acc. to SN 31920	50 FIT
T1 value for proof test interval or service life acc. to IEC 61508	10 y
Display version	
• for switching status	Handle
Certificates/approvals	

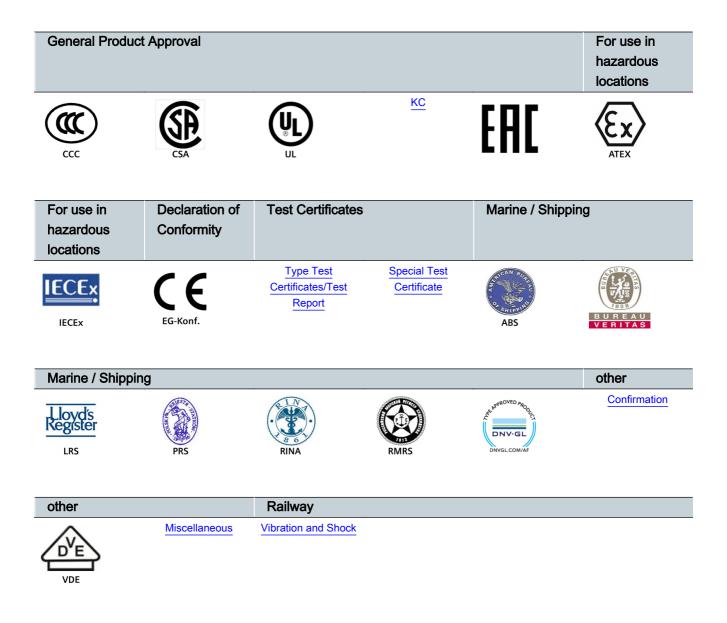

### Further information

Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)


https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2021-0HA15


#### Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2021-0HA15


Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3RV2021-0HA15

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3RV2021-0HA15&lang=en

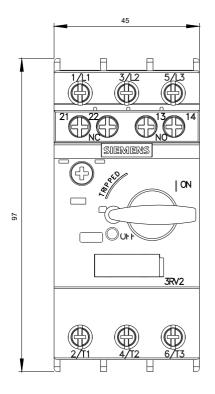

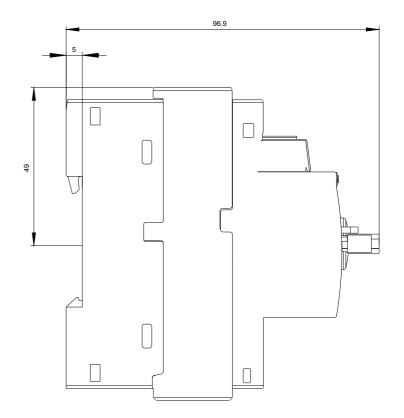

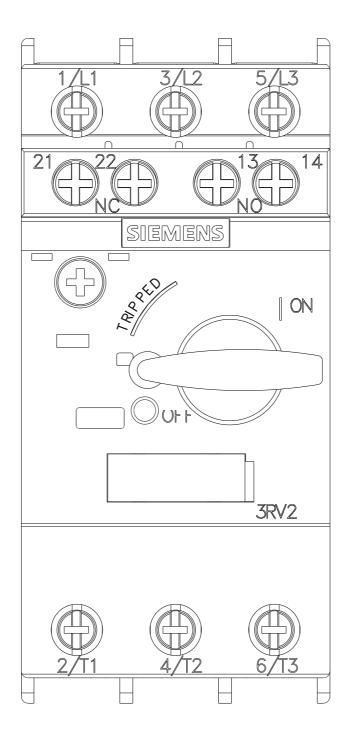

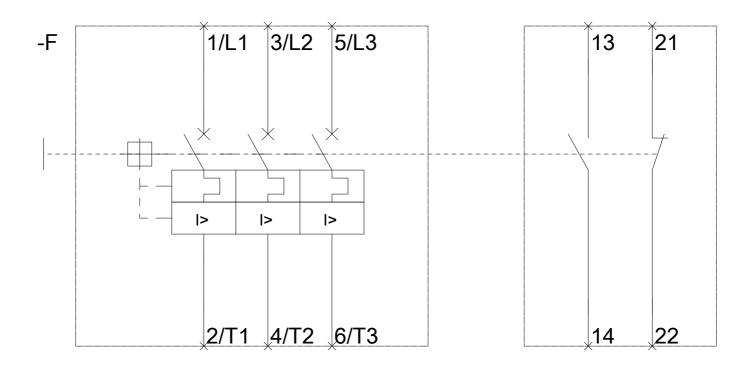

last modified:

12/14/2017