

STAR-DELTA COMB. AC3, 22KW/400V AC110V,  
50/60HZ, 3-POLE SZ S0,  
SCREW TERMINAL ELECTR. AND MECH. INTERLOCK  
3NO+3NC INTEGR.



### General technical data:

Product brand name		SIRIUS
product designation		star-delta (wye-delta) contactor assembly 3RA24
Product function		wye-delta motor start-up
Size of the contactor		S0
Protection class IP / on the front		IP20
Degree of pollution		3
Insulation voltage / with degree of pollution 3 / rated value	V	690
Installation altitude / at a height over sea level / maximum	m	2,000
Ambient temperature <ul style="list-style-type: none"> <li>during transport</li> <li>during storage</li> <li>during operating</li> </ul>	°C	-55 ... 80
	°C	-55 ... 80
	°C	-25 ... 60
Resistance against shock		12.5g / 5 ms and 7.8g / 10 ms
Impulse voltage resistance / rated value	kV	6
Active power loss / per conductor / typical	W	1.6
Item designation <ul style="list-style-type: none"> <li>according to DIN 40719 extendable after IEC 204-2 / according to IEC 750</li> <li>according to DIN EN 61346-2</li> </ul>		K
		Q

<b>Manufacturer article number</b> <ul style="list-style-type: none"> <li>• of the function module for for wye-delta circuits included in the scope of supply</li> <li>• 1 / of the contactor included in the scope of supply</li> <li>• 2 / of the contactor included in the scope of supply</li> <li>• 3 / of the contactor included in the scope of supply</li> <li>• of the RS applied assembly kit</li> </ul>		<a href="#">3RA2816-0EW20</a>  <a href="#">3RT2027-1AG20</a> <a href="#">3RT2027-1AG20</a> <a href="#">3RT2026-1AG20</a> <a href="#">3RA2923-2BB1</a>
<b>Mechanical operating cycles as operating time</b> <ul style="list-style-type: none"> <li>• of the main contacts / typical</li> <li>• of the auxiliary contacts / typical</li> <li>• of the contactor / typical</li> <li>• of the contactor with added auxiliary switch block / typical</li> </ul>		10,000,000 10,000,000 10,000,000 10,000,000
<b>Communication:</b>		
<b>Product function</b> <ul style="list-style-type: none"> <li>• bus-communication</li> <li>• control circuit interface with IO link</li> </ul>		No No
<b>Protocol / will be supported / AS interface protocol</b>		No
<b>Main circuit:</b>		
<b>Number of poles / for main current circuit</b>		3
<b>Number of NC contacts / for main contacts</b>		0
<b>Number of NO contacts / for main contacts</b>		3
<b>Operating voltage / at AC-3 / rated value / maximum</b>	V	690
<b>Operating current</b> <ul style="list-style-type: none"> <li>• at AC-1 / at 400 V <ul style="list-style-type: none"> <li>• at 40 °C ambient temperature / rated value</li> <li>• at 60 °C ambient temperature / rated value</li> </ul> </li> <li>• at AC-2 / at 400 V / rated value</li> <li>• at AC-3 / at 400 V / rated value</li> <li>• with 1 current path / at DC-1 <ul style="list-style-type: none"> <li>• at 24 V / rated value</li> <li>• at 110 V / rated value</li> </ul> </li> <li>• with 2 current paths in series / at DC-1 <ul style="list-style-type: none"> <li>• at 24 V / rated value</li> <li>• at 110 V / rated value</li> </ul> </li> <li>• with 3 current paths in series / at DC-1 <ul style="list-style-type: none"> <li>• at 24 V / rated value</li> <li>• at 110 V / rated value</li> </ul> </li> <li>• with 1 current path / at DC-3 / at DC-5 <ul style="list-style-type: none"> <li>• at 24 V / rated value</li> </ul> </li> </ul>	A A A A  A A  A A  A A  A	40 35 40 17  35 4.5  35 35  35 35  20

<ul style="list-style-type: none"> <li>• at 110 V / rated value</li> </ul>	A	2.5
<ul style="list-style-type: none"> <li>• with 2 current paths in series / at DC-3 / at DC-5</li> </ul>		
<ul style="list-style-type: none"> <li>• at 24 V / rated value</li> </ul>	A	35
<ul style="list-style-type: none"> <li>• at 110 V / rated value</li> </ul>	A	15
<ul style="list-style-type: none"> <li>• with 3 current paths in series / at DC-3 / at DC-5</li> </ul>		
<ul style="list-style-type: none"> <li>• at 24 V / rated value</li> </ul>	A	35
<ul style="list-style-type: none"> <li>• at 110 V / rated value</li> </ul>	A	35
<b>Service power</b>		
<ul style="list-style-type: none"> <li>• at AC-2 / at 400 V / rated value</li> </ul>	kW	18.5
<ul style="list-style-type: none"> <li>• at AC-3</li> </ul>		
<ul style="list-style-type: none"> <li>• at 400 V / rated value</li> </ul>	kW	22
<ul style="list-style-type: none"> <li>• at 500 V / rated value</li> </ul>	kW	18.5
<ul style="list-style-type: none"> <li>• at 690 V / rated value</li> </ul>	kW	22
<ul style="list-style-type: none"> <li>• at AC-4 / at 400 V / rated value</li> </ul>	kW	4.4
<b>Off-load operating frequency</b>	1/h	15
<b>Frequency of operation</b>		
<ul style="list-style-type: none"> <li>• at AC-1 / according to IEC 60947-6-2 / maximum</li> </ul>	1/h	1,000
<ul style="list-style-type: none"> <li>• at AC-2 / according to IEC 60947-6-2 / maximum</li> </ul>	1/h	1,000
<ul style="list-style-type: none"> <li>• at AC-3 / according to IEC 60947-6-2 / maximum</li> </ul>	1/h	1,000
<ul style="list-style-type: none"> <li>• at AC-4 / according to IEC 60947-6-2 / maximum</li> </ul>	1/h	300

#### Control circuit:

<b>Design of activation</b>		conventional
<b>Type of voltage / of the controlled supply voltage</b>		AC
<b>Control supply voltage frequency</b>		
<ul style="list-style-type: none"> <li>• 1 / rated value</li> </ul>	Hz	50
<ul style="list-style-type: none"> <li>• 2 / rated value</li> </ul>	Hz	60
<b>Control supply voltage / 1</b>		
<ul style="list-style-type: none"> <li>• at 50 Hz / for AC / rated value</li> </ul>	V	110
<ul style="list-style-type: none"> <li>• at 60 Hz / for AC / rated value</li> </ul>	V	110
<b>Operating range factor control supply voltage rated value / of the solenoid</b>		
<ul style="list-style-type: none"> <li>• at 50 Hz / for AC</li> </ul>		0.8 ... 1.1
<ul style="list-style-type: none"> <li>• at 60 Hz / for AC</li> </ul>		0.8 ... 1.1
<b>Apparent pull-in power / of the solenoid / for AC</b>	V·A	65
<b>Apparent holding power / of the solenoid / for AC</b>	V·A	8.5
<b>Inductive power factor</b>		
<ul style="list-style-type: none"> <li>• with the pull-in power of the coil</li> </ul>		0.82
<ul style="list-style-type: none"> <li>• with the pull-in power of the coil</li> </ul>		0.25

#### Auxiliary circuit:

<b>Product extension / auxiliary switch</b>		No
<b>Contact reliability / of the auxiliary contacts</b>		< 1 error per 100 million operating cycles
<b>Number of NC contacts / for auxiliary contacts</b>		
• instantaneous switching		3
• lagging switching		0
<b>Number of NO contacts / for auxiliary contacts</b>		
• instantaneous switching		3
• leading switching		0
<b>Operating current / of the auxiliary contacts</b>		
• at AC-12 / maximum	A	10
• at AC-15		
• at 230 V	A	6
• at 400 V	A	3
• at DC-12		
• at 48 V	A	6
• at 60 V	A	6
• at 110 V	A	3
• at 220 V	A	1
• at DC-13		
• at 24 V	A	10
• at 48 V	A	2
• at 60 V	A	2
• at 110 V	A	1
• at 220 V	A	0.3

#### Short-circuit:

##### Design of the fuse link

- for short-circuit protection of the main circuit
  - with type of assignment 1 / required
- at type of coordination 2 / required
- for short-circuit protection of the auxiliary switch / required

gL/gG LV HRC 3NA, DIAZED 5SB, NEOZED 5SE: 100 A

gL/gG LV HRC 3NA, DIAZED 5SB, NEOZED 5SE: 35 A

fuse gL/gG: 10 A

#### Installation/mounting/dimensions:

<b>Built in orientation</b>		any
<b>Type of mounting</b>		screw and snap-on mounting onto 35 mm standard mounting rail
<b>Width</b>	mm	135
<b>Height</b>	mm	101
<b>Depth</b>	mm	171







<b>Distance, to be maintained, to the ranks assembly</b>	• forwards	mm	6
	• backwards	mm	0
	• upwards	mm	6
	• downwards	mm	6
	• sideways	mm	6
<b>Distance, to be maintained, to earthed part</b>	• forwards	mm	6
	• backwards	mm	0
	• upwards	mm	6
	• downwards	mm	6
	• sideways	mm	6
<b>Distance, to be maintained, conductive elements</b>	• forwards	mm	6
	• backwards	mm	0
	• upwards	mm	6
	• downwards	mm	6
	• sideways	mm	6

#### Connections:

<b>Design of the electrical connection</b>	• for main current circuit	screw-type terminals
	• for auxiliary and control current circuit	screw-type terminals
<b>Type of the connectable conductor cross-section</b>	• for main contacts	
	• solid	2x (1 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 10 mm <sup>2</sup> )
	• stranded	2x (1 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 10 mm <sup>2</sup> )
	• finely stranded	
	• with conductor end processing	2x (1 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup>
	• for AWG conductors / for main contacts	2x (16 ... 12), 2x (14 ... 8)
	• for auxiliary contacts	
	• solid	2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )
	• finely stranded	
	• with conductor end processing	2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )
	• for AWG conductors / for auxiliary contacts	2x (20 ... 16), 2x (18 ... 14)

#### Certificates/approvals:

<b>Verification of suitability</b>	CE / UL / CSA / CCC
------------------------------------	---------------------

<b>General Product Approval</b>	<b>Test Certificates</b>
<a href="#">ROSTEST</a>	<a href="#">Manufacturer</a>
<b>Shipping Approval</b>	
 ABS	 DNV
 GL	 LRS
	 PRS
	 RINA
<b>Shipping Approval</b>	<b>other</b>
 RMRS	<a href="#">other</a>

## UL/CSA ratings

<b>Contact rating designation / for auxiliary contacts / according to UL</b>	A600 / Q600
--	-------------

## Safety:

<b>B10 value / with high demand rate</b>		1,000,000
• according to SN 31920		
<b>Failure rate (FIT value) / with low demand rate</b>		
• according to SN 31920	FIT	100
<b>Proportion of dangerous failures</b>		
• with low demand rate / according to SN 31920	%	40
• with high demand rate / according to SN 31920	%	75
<b>T1 value / for proof test interval or service life</b>		
• according to IEC 61508	a	20
<b>Protection against electrical shock</b>		finger-safe

## Further information:

### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

### Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

### CAX-Online-Generator




<http://www.siemens.com/cax>

### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RA2426-8XF32-1AG2/all>

### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3RA2426-8XF32-1AG2](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RA2426-8XF32-1AG2)

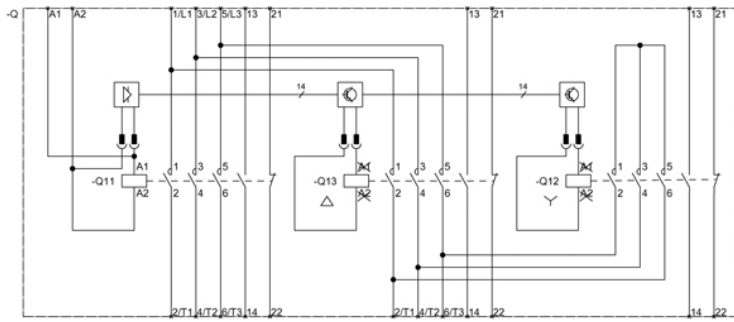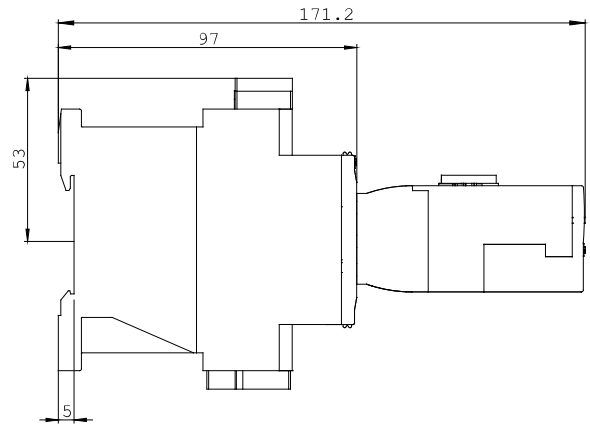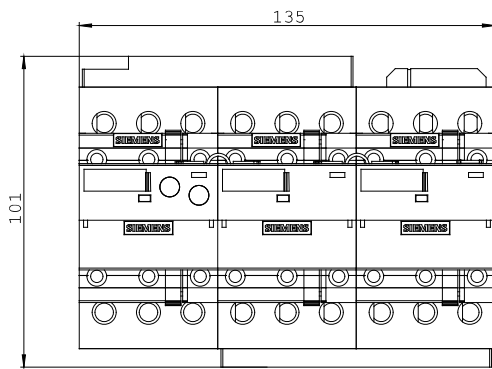

last change:

Oct 24, 2011