





RELAY,  
N-TYPE WITH 1 NO CONTACT FOR AC 230V 16A  
CONTROL AC 12V

Similar to image

| Technical data:  |     |          |
|--|-----|----------|
| Mounting depth   | mm  | 90       |
| Number of NC contacts                                  |     | 0        |
| Type of mounting                                       |     | DIN rail |
| Number of change-over switches                         |     | 0        |
| Number of NO contacts                                  |     | 1        |
| Number of pitch units for width                        |     | 1        |
| Type of voltage  |     |          |
| • of control voltage_1                                 |     | AC       |
| Switching capacity apparent power                      |     |          |
| • for uncorrected fluorescent lamp load                | V·A | 400      |
| Switching capacity real power / for filament lamp load | W   | 1,200    |
| Switching capacity current / at cos phi 0.6            | A   | 16       |
| Operating current / rated value                        | A   | 16       |
| Control voltage frequency                              |     |          |
| • _1   |     |          |
| • initial value  | Hz  | 50       |
| • final value  | Hz  | 50       |
| Control voltage/_1                                     |     |          |

|                                     |   |                      |
|-------------------------------------|---|----------------------|
| • final value                       |   |                      |
| • initial value                     | V | 12                   |
| •                                   | V | 12                   |
| Type of voltage / of supply voltage |   | AC                   |
| Relay design                        |   | partially electronic |
| Supply voltage / maximum            | V | 250                  |
| Supply voltage / minimum            | V | 250                  |

#### Certificates/approvals:

| General Product Approval  | Declaration of Conformity   | other                                       |
|---|---|---|
| <br>CCC  | <br>EG-Konf. | <a href="#">Environmental Confirmations</a> |
| <br>GOST | <br>VDE      |   |

#### Further information:

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

##### Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5TT4201-3/all>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5TT4201-3](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TT4201-3)

##### CAX-Online-Generator

<http://www.siemens.com/cax>

##### Tender specifications

[Datanorm](#) [GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

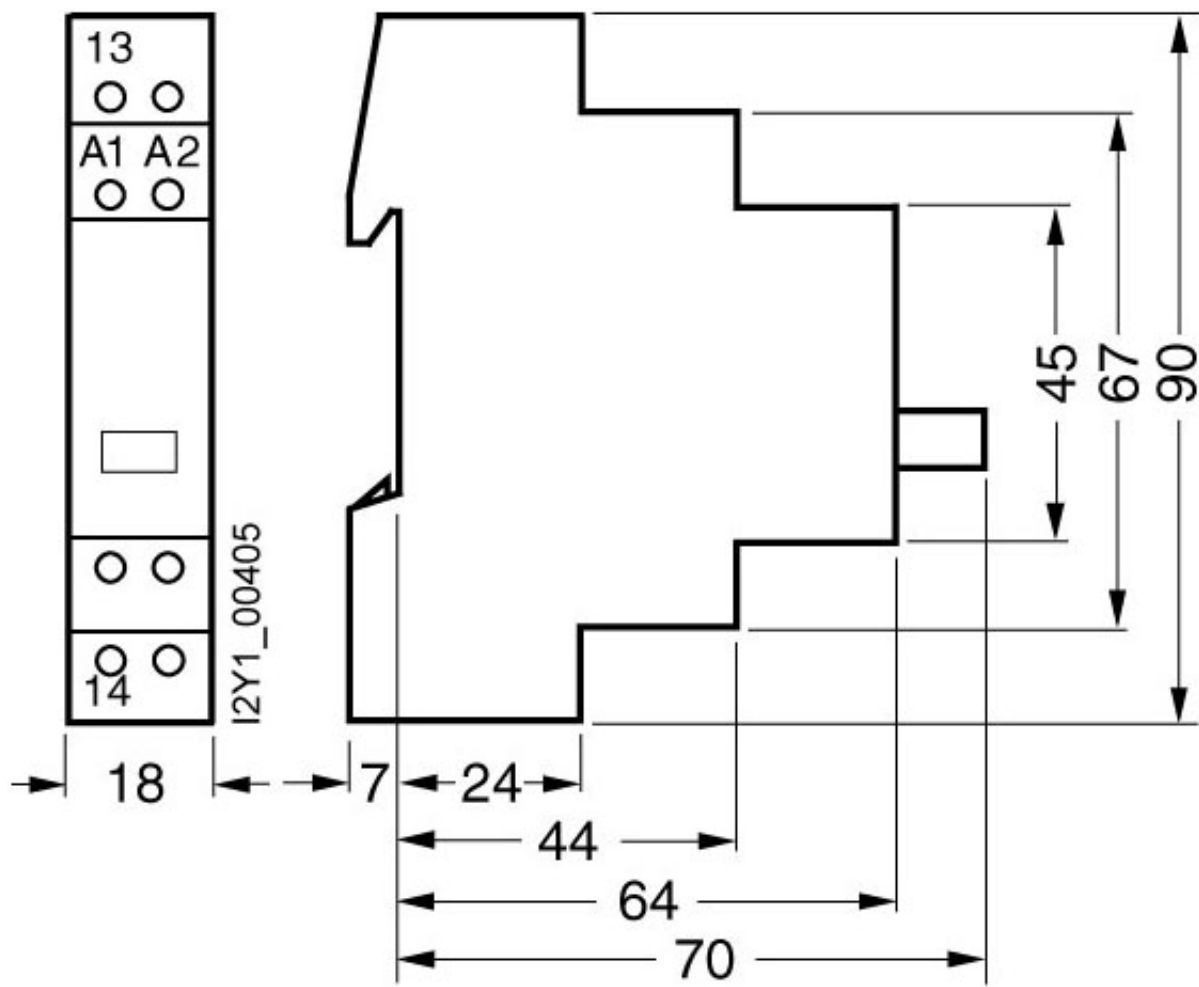

last change:

Aug 12, 2013