



RELAY,  
N-TYPE WITH 1 NO AND 1NC CONTACT FOR AC 230V  
16A CONTROL AC 12V

Similar to image

Technical data:		
Mounting depth	mm	90
Number of NC contacts		1
Mounting type		DIN rail
Number of change-over switches		0
Number of NO contacts		1
Number of width units		1
Voltage type		AC
• of control voltage_1		
Switching capacity apparent power		400
• for uncorrected fluorescent lamp load	V·A	
Switching capacity real power / for filament lamp load	W	1,200
Switching capacity current / at cos phi 0.6	A	16
Operating current / rated value	A	16
Control voltage frequency		
• _1		
• initial value	Hz	
• final value	Hz	50
Control voltage/ _1		

• final value		
• initial value	V	12
•	V	12
<b>Type of / supply voltage</b>		AC
<b>Relay design</b>		partially electronic
<b>Supply voltage / maximum</b>	V	400
<b>Supply voltage / minimum</b>	V	400

#### Certificates/approvals:

##### General Product Approval

##### Declaration of Conformity



CCC



GOST



VDE



EG-Konf.

#### Further information:

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

##### Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5TT4205-3/all>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5TT4205-3](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TT4205-3)

##### CAX-Online-Generator

<http://www.siemens.com/cax>

##### Tender specifications

[Datanorm](#) [GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

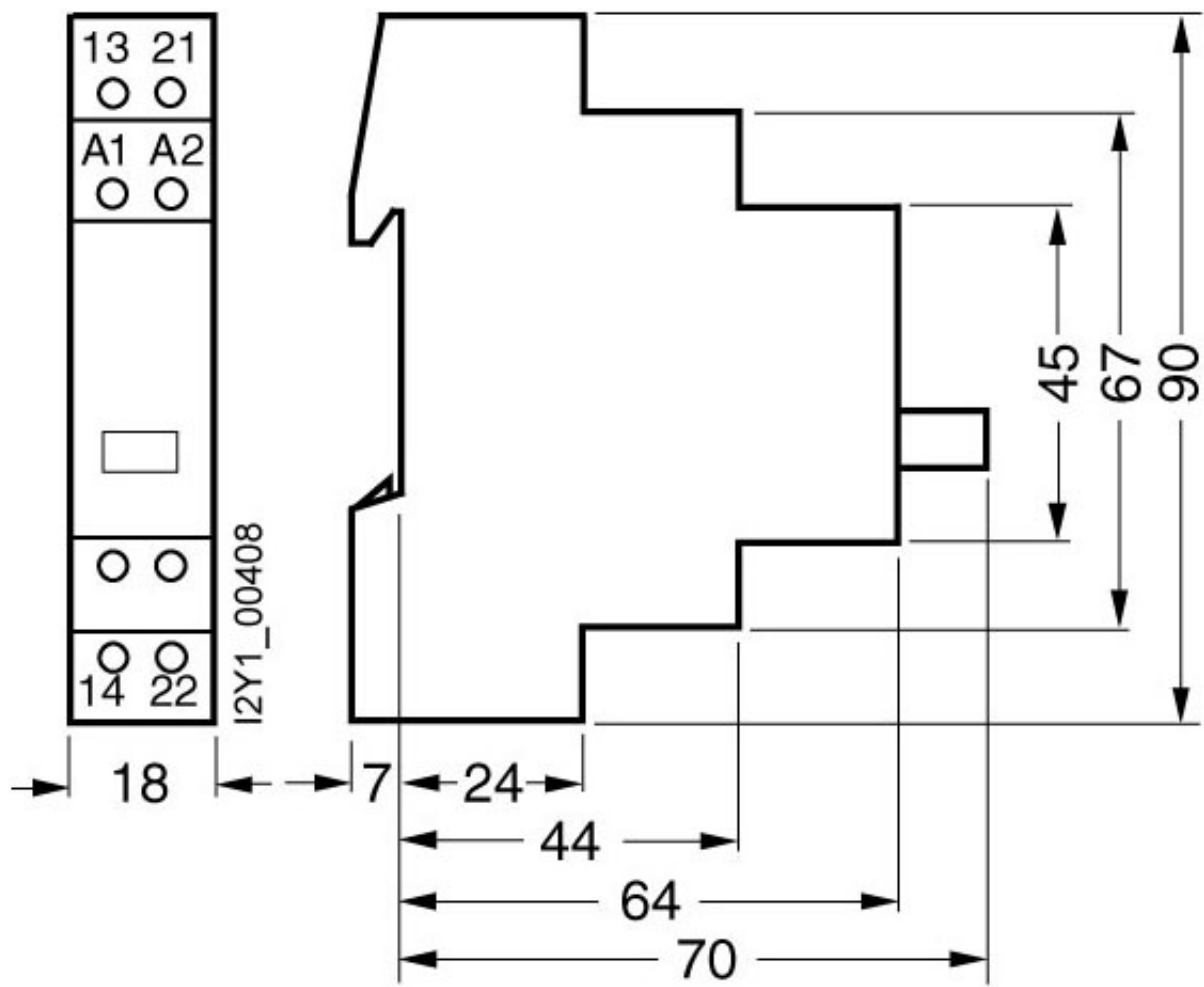

last change:

Mar 17, 2014