SIEMENS

Product data sheet 3RH2131-2VB40



COUPLING CONTACTOR RELAY, 3NO+1NC, DC 24V, 0.85..1.85*US, W/ INTEGRATED DIODE, SZ S00, SPRING-LOADED TERMINAL

| General technical data: | | |
|---|----|------------------------|
| Product brand name | | SIRIUS |
| Size of the contactor | | S00 |
| Identification number and letter for switching elements | | 31 E |
| Product extension / auxiliary switch | | No |
| Protection class IP / on the front | | IP20 |
| Protection against electrical shock | | finger-safe |
| Degree of pollution | | 3 |
| Insulation voltage / with degree of pollution 3 / rated value | V | 690 |
| Installation altitude / at a height over sea level / maximum | m | 2,000 |
| Ambient temperature / during storage | °C | -55 80 |
| Ambient temperature / during operating | °C | -25 60 |
| Shock resistance | | |
| at rectangular impulse | | |
| • at DC | | 10g / 5 ms, 5g / 10 ms |
| at sine pulse | | |
| • at DC | | 15g / 5 ms, 8g / 10 ms |
| Impulse voltage resistance / rated value | kV | 6 |
| Mechanical operating cycles as operating time | | |
| of the contactor / typical | | 30,000,000 |

| Control circuit: | | |
|---|----|---|
| Design of the surge suppressor | | with diode |
| Type of voltage / of the controlled supply voltage | | DC |
| Control supply voltage / 1 | | |
| • for DC / rated value | V | 24 |
| Operating range factor control supply voltage rated value / of the solenoid | | |
| • for DC | | 0.85 1.85 |
| Holding power / of the solenoid / for DC | W | 1.6 |
| Pull-in power / of the solenoid / for DC | W | 1.6 |
| Closing delay | | |
| • at DC | ms | 30 100 |
| Opening delay | | |
| • at DC | ms | 25 90 |
| Arcing time | s | 10 15 |
| Auxiliary circuit: | | |
| Contact reliability / of the auxiliary contacts | | 1 faulty switching per 100 million (17 V, 1 mA) |

| Auxiliary circuit: | | |
|--|---|---|
| Contact reliability / of the auxiliary contacts | | 1 faulty switching per 100 million (17 V, 1 mA) |
| Number of NC contacts / for auxiliary contacts / instantaneous switching | | 1 |
| Number of NO contacts / for auxiliary contacts / instantaneous switching | | 3 |
| Operating current / of the auxiliary contacts / at AC-12 / maximum | Α | 10 |
| Operating current / of the auxiliary contacts / at AC-15 | | |
| • at 230 V | Α | 6 |
| • at 400 V | Α | 3 |
| • at 500 V | Α | 2 |
| • at 690 V | Α | 1 |
| Operating current | | |
| • of the auxiliary contacts / with 1 current path / at DC-12 | | |
| • at 24 V | Α | 6 |
| • at 110 V | Α | 3 |
| • at 220 V | Α | 1 |
| • with 2 current paths in series / at DC-12 | | |
| at 24 V / rated value | Α | 10 |
| • at 60 V / rated value | Α | 10 |
| at 110 V / rated value | Α | 4 |
| at 220 V / rated value | Α | 2 |
| • at 440 V / rated value | Α | 1.3 |
| at 600 V / rated value | А | 0.65 |

| • with 3 current paths in series / at DC-12 | | |
|--|-----|--------|
| • at 24 V / rated value | Α | 10 |
| • at 60 V / rated value | Α | 10 |
| • at 110 V / rated value | Α | 10 |
| • at 220 V / rated value | Α | 3.6 |
| • at 440 V / rated value | Α | 2.5 |
| • at 600 V / rated value | Α | 1.8 |
| Operating current | | |
| • of the auxiliary contacts / with 1 current path / at DC-13 | | |
| • at 24 V | Α | 6 |
| • at 110 V | Α | 1 |
| • at 220 V | Α | 0.3 |
| • with 2 current paths in series / at DC-13 | | |
| • at 24 V / rated value | Α | 10 |
| • at 60 V / rated value | Α | 3.5 |
| • at 110 V / rated value | Α | 1.3 |
| • at 220 V / rated value | Α | 0.9 |
| • at 440 V / rated value | Α | 0.2 |
| • at 600 V / rated value | Α | 0.1 |
| • with 3 current paths in series / at DC-13 | | |
| • at 24 V / rated value | Α | 10 |
| • at 60 V / rated value | Α | 4.7 |
| • at 110 V / rated value | Α | 3 |
| • at 220 V / rated value | Α | 1.2 |
| • at 440 V / rated value | Α | 0.5 |
| • at 600 V / rated value | Α | 0.26 |
| Off-load operating frequency | | |
| • at AC | 1/h | 10,000 |
| • at DC | 1/h | 10,000 |
| Frequency of operation | | |
| • at AC-12 / maximum | 1/h | 1,000 |
| • at AC-14 / maximum | 1/h | 1,000 |
| • at AC-15 / maximum | 1/h | 1,000 |
| • at DC-12 / maximum | 1/h | 1,000 |
| • at DC-13 / maximum | 1/h | 1,000 |
| | | |

| Short-circuit: | |
|--|--|
| Design of the fuse link / for short-circuit protection of the auxiliary switch | |
| • required | Fuse gL/gG: 10 A, miniature circuit breaker C 6 A (short-circuit current lk < 400 A) |

| Installation/mounting/dimensions: | | |
|---|----|--|
| Built in orientation | | vertical |
| Type of mounting | | screw and snap-on mounting onto 35 mm standard mounting rail |
| Width | mm | 45 |
| Height | mm | 70 |
| Depth | mm | 73 |
| Distance, to be maintained, to the ranks assembly / sidewards | mm | 0 |

| Connections: | | |
|---|-------------------------|--|
| Design of the electrical connection | | |
| for auxiliary and control current circuit | spring-loaded terminals | |
| Type of the connectable conductor cross-section | | |
| for auxiliary contacts | | |
| • solid | 2x (0.5 4 mm²) | |
| • finely stranded | | |
| with conductor end processing | 2x (0.5 2.5 mm²) | |
| without conductor final cutting | 2x (0.5 2.5 mm²) | |
| for AWG conductors / for auxiliary contacts | 2x (20 12) | |

Certificates/approvals:

General Product Approval



ROSTEST



Test Certificates

Manufacturer

Shipping Approval



cqc





Lloyd's Registe





Shipping Approval

other





| UL/CSA ratings: | | | |
|---------------------------|-------------|--|--|
| | A600 / Q600 | | |
| | | | |
| Safety:related Parameter: | | | |
| | | | |
| | 1,000,000 | | |
| | | | |
| | | | |

| according to IEC 61508 | а | 10 |
|---|-----|-----|
| Proportion of dangerous failures | | |
| • with low demand rate / according to SN 31920 | % | 40 |
| • with high demand rate / according to SN 31920 | % | 73 |
| Failure rate (FIT value) / with low demand rate | | |
| according to SN 31920 | FIT | 100 |
| Product function / positively driven operation to IEC 60947-5-1 | | Yes |

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)

http://www.siemens.com/industrial-controls/mall

Cax online generator:


http://www.siemens.com/cax


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


http://support.automation.siemens.com/WW/view/en/3RH2131-2VB40/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

 $\underline{\text{http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RH2131-2VB40}$



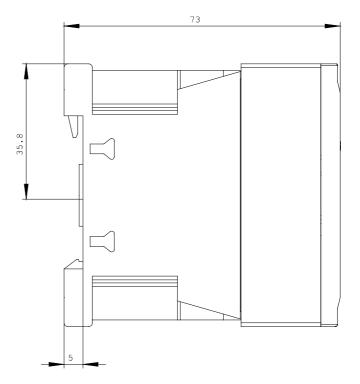

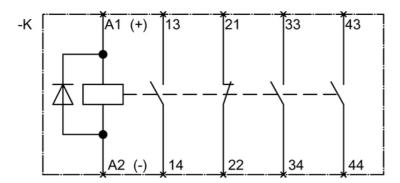

last change: Oct 24, 2011