



MOTOR STARTER SIRIUS 3RM1 REVERSING STARTER
500 V;
0,1-0,5 A;
110-230 V AC SCREW CONNECTION SYSTEM

General technical data:

product brand name		SIRIUS
Product designation		Motor starter
Design of the product		with reversing functionality and electronic overload protection
Trip class		CLASS 10A
Protection class IP		IP20
Suitability for use / device connector 3ZY12		No
Product function / intrinsic device protection		Yes
Type of the motor protection		solid-state
Product function / adjustable current limitation		Yes
Installation altitude / at a height over sea level / maximum	m	4,000
Ambient temperature		
• during operating	°C	-25 ... +60
• during transport	°C	-40 ... +70
• during storage	°C	-40 ... +70
Resistance against shock		6g / 11 ms
Resistance against vibration		1 ... 6 Hz, 15 mm; 20 m/s², 500 Hz
Impulse voltage resistance / rated value	kV	6
Insulation voltage / rated value	V	600

Mechanical operating cycles as operating time / typical		30,000,000
Conductor-bound parasitic coupling conductor-conductor SURGE / according to IEC 61000-4-5		1 kV
Conductor-bound parasitic coupling BURST / according to IEC 61000-4-4		3 kV / 5 kHz
Conducted interference as high-frequency radiation according to IEC 61000-4-6		10 V
Electrostatic discharge / according to IEC 61000-4-2		4 kV contact discharge / 8 kV air discharge
Field-bound HF-interference emission / according to CISPR11		Class B for domestic, business and commercial environments; Class A for industrial environments at 110 V DC
Conductor-bound HF-interference emission / according to CISPR11		Class B for domestic, business and commercial environments; Class A for industrial environments at 110 V DC
Maximum permissible voltage for safe disconnection		
• between main circuit and auxiliary circuit	V	500
• between control and auxiliary circuit	V	250
Reference code		
• according to DIN 40719 extended according to IEC 204-2 / according to IEC 750		Q
• according to DIN EN 61346-2		Q

Safety related data:

Protection against electrical shock

finger-safe

Main circuit:

Number of poles / for main current circuit		3
Operating voltage / rated value / maximum	V	500
Operating frequency		
• 1	Hz	50
• 2	Hz	60
Operating current / at 400 V / for AC / rated value	A	0.5
Minimum load in % of I_M	%	20
Active power loss / typical	W	0.02
Adjustable response current		
• of the current-dependent overload release	A	0.1 ... 0.5
Service power / for three-phase servomotors / at 400 V		
• at 50 Hz	kW	0 ... 0.12
Operating cycles / maximum	1/s	1

Control circuit/ Control:

Voltage type / of control feed voltage		AC/DC
Control supply voltage / 1		
• for DC / rated value	V	110

<ul style="list-style-type: none"> • at 50 Hz <ul style="list-style-type: none"> • for AC • at 60 Hz <ul style="list-style-type: none"> • for AC 	V	110 ... 230
	V	110 ... 230
Operating range factor control supply voltage rated value <ul style="list-style-type: none"> • for DC • at 50 Hz <ul style="list-style-type: none"> • for AC • at 60 Hz <ul style="list-style-type: none"> • for AC 		0.85 ... 1.1 0.85 ... 1.1 1.1 ... 0.85
Control current <ul style="list-style-type: none"> • with AC <ul style="list-style-type: none"> • at 230 V <ul style="list-style-type: none"> • with standby operating mode • during operation • when switching on • at 110 V <ul style="list-style-type: none"> • with standby operating mode • during operation • on switching on • with DC <ul style="list-style-type: none"> • in standby mode • during operation • on switching on 	mA mA mA mA mA mA mA mA mA	9 22 33 16 36 55 6 30 15
Input voltage / at the digital input <ul style="list-style-type: none"> • with signal <1> <ul style="list-style-type: none"> • for DC • with AC • with signal <0> <ul style="list-style-type: none"> • with AC • with DC 	V V V V	79 ... 121 93 ... 253 0 ... 40 0 ... 40
Input voltage / at digital input <ul style="list-style-type: none"> • with signal <1> <ul style="list-style-type: none"> • with AC <ul style="list-style-type: none"> • at 230 V • at 110 V • with DC • with signal <0> <ul style="list-style-type: none"> • with AC <ul style="list-style-type: none"> • at 230 V 	mA mA mA mA	2.3 1.1 1.5 0.4

• at 110 V	mA	0.2
• with DC	mA	0.25
ON-delay time	ms	60 ... 90
OFF-delay time	ms	60 ... 90

Auxiliary circuit:

Number of changeover contacts / for auxiliary contacts		1
Design of the switching contact / as make contact / for reporting function		Electronic
Operating current / of the auxiliary contacts		
• at AC-15	A	3
• at DC-13	A	1

Installation/ mounting/ dimensions:

mounting position		vertical, horizontal, standing
Mounting type		screw and snap-on mounting onto 35 mm standard mounting rail
Width	mm	22.5
Height	mm	100
Depth	mm	141.6

Connections/ terminals:

Design of the electrical connection		
• for main current circuit		screw-type terminals
• for auxiliary and control current circuit		screw-type terminals
Type of the connectable conductor cross-section		
• for main contacts		
• solid		1x (0,5 ... 4 mm ²), 2x (0,5 ... 2,5 mm ²)
• finely stranded		
• with conductor end processing		1x (0,5 ... 2,5 mm ²), 2x (0,5 ... 1,5 mm ²)
• for AWG conductors		1x (20 ... 12), 2x (20 ... 14)
Type of the connectable conductor cross-section		
• for auxiliary contacts		
• solid		1x (0,5 ... 2,5 mm ²), 2x (1,0 ... 1,5 mm ²)
• finely stranded		
• with conductor end processing		1x (0,5 ... 2,5 mm ²), 2x (0,5 ... 1 mm ²)
• for AWG conductors		1x (20 ... 14), 2x (18 ... 16)

UL ratings:

Full-load current (FLA) / for 3-phase motor / at 480 V / rated value	A	0.5
---	---	-----

Certificates/ approvals:

General Product Approval



CCC



GOST



UL



EG-Konf.

Test Certificates

[Type Test
Certificates/Test
Report](#)

other

[Environmental
Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator


<http://www.siemens.com/cax>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RM1201-1AA14/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RM1201-1AA14

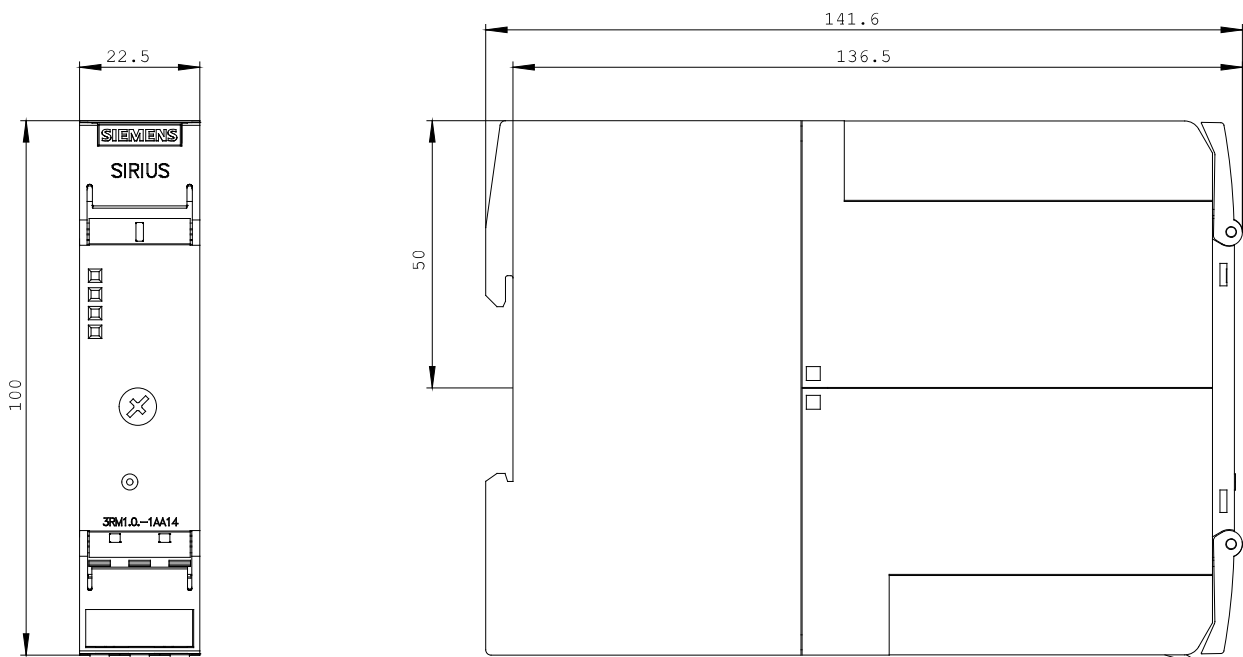

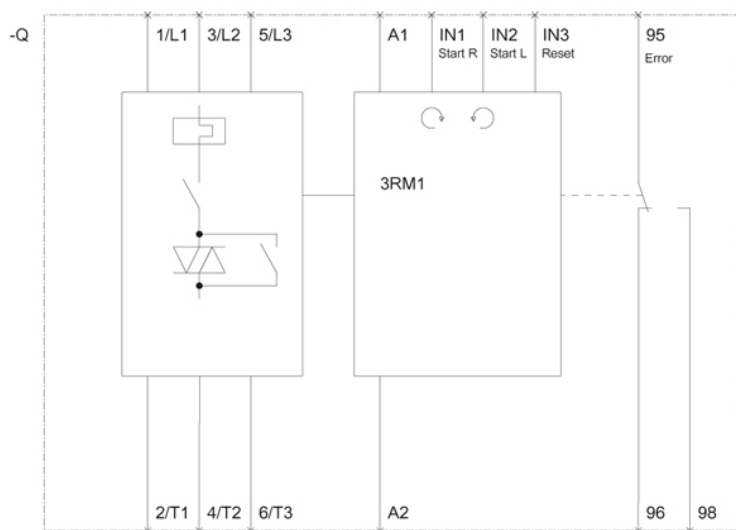

last change:

Mar 17, 2014