SIEMENS

Data sheet 3RV2021-1BA15



CIRCUIT-BREAKER SZ S0, FOR MOTOR PROTECTION, CLASS 10, A-REL. 1.4...2A, N-RELEASE 26A, SCREW CONNECTION, STANDARD SW. CAPACITY W. TRANSVERSE AUX. SWITCH 1NO+1NC

Figure similar

Product brand name	SIRIUS
Product designation	Circuit breaker
Design of the product	For motor protection
Product type designation	3RV2

General technical data	
Size of the circuit-breaker	S0
Size of contactor can be combined company-specific	S00, S0
Product extension	
Auxiliary switch	Yes
Power loss [W] total typical	6 W
Insulation voltage with degree of pollution 3 rated	690 V
value	
Surge voltage resistance rated value	6 kV
maximum permissible voltage for safe isolation	
 in networks with grounded star point between 	400 V
main and auxiliary circuit	
• in networks with grounded star point between	400 V
main and auxiliary circuit	

Protection class IP	
• on the front	IP20
of the terminal	IP20
Shock resistance	
• acc. to IEC 60068-2-27	25g / 11 ms
Mechanical service life (switching cycles)	
of the main contacts typical	100 000
 of auxiliary contacts typical 	100 000
Electrical endurance (switching cycles)	
• typical	100 000
Type of protection	Increased safety
Certificate of suitability relating to ATEX	on request
Protection against electrical shock	finger-safe
Equipment marking acc. to DIN EN 81346-2	Q
Ambient conditions	
Installation altitude at height above sea level	
• maximum	2 000 m
Ambient temperature	
 during operation 	-20 +60 °C
during storage	-50 +80 °C
during transport	-50 +80 °C
Temperature compensation	-20 +60 °C
Relative humidity during operation	10 95 %
Main circuit	
Number of poles for main current circuit	3
Number of poles for main current circuit Adjustable pick-up value current of the current-	3 1.4 2 A
Number of poles for main current circuit Adjustable pick-up value current of the current- dependent overload release	
Number of poles for main current circuit Adjustable pick-up value current of the current- dependent overload release Operating voltage	1.4 2 A
Number of poles for main current circuit Adjustable pick-up value current of the current- dependent overload release Operating voltage • rated value	1.4 2 A 690 V
Number of poles for main current circuit Adjustable pick-up value current of the current- dependent overload release Operating voltage • rated value • at AC-3 rated value maximum	1.4 2 A 690 V 690 V
Number of poles for main current circuit Adjustable pick-up value current of the current- dependent overload release Operating voltage • rated value • at AC-3 rated value maximum Operating frequency rated value	1.4 2 A 690 V 690 V 50 60 Hz
Number of poles for main current circuit Adjustable pick-up value current of the current- dependent overload release Operating voltage • rated value • at AC-3 rated value maximum Operating frequency rated value Operating current rated value	1.4 2 A 690 V 690 V
Number of poles for main current circuit Adjustable pick-up value current of the current- dependent overload release Operating voltage • rated value • at AC-3 rated value maximum Operating frequency rated value Operating current rated value Operating current	1.4 2 A 690 V 690 V 50 60 Hz
Number of poles for main current circuit Adjustable pick-up value current of the current- dependent overload release Operating voltage • rated value • at AC-3 rated value maximum Operating frequency rated value Operating current rated value Operating current • at AC-3	1.4 2 A 690 V 690 V 50 60 Hz 2 A
Number of poles for main current circuit Adjustable pick-up value current of the current- dependent overload release Operating voltage • rated value • at AC-3 rated value maximum Operating frequency rated value Operating current rated value Operating current • at AC-3 — at 400 V rated value	1.4 2 A 690 V 690 V 50 60 Hz
Number of poles for main current circuit Adjustable pick-up value current of the current- dependent overload release Operating voltage • rated value • at AC-3 rated value maximum Operating frequency rated value Operating current rated value Operating current • at AC-3 — at 400 V rated value Operating power	1.4 2 A 690 V 690 V 50 60 Hz 2 A
Number of poles for main current circuit Adjustable pick-up value current of the current- dependent overload release Operating voltage • rated value • at AC-3 rated value maximum Operating frequency rated value Operating current rated value Operating current • at AC-3 — at 400 V rated value Operating power • at AC-3	1.4 2 A 690 V 690 V 50 60 Hz 2 A
Number of poles for main current circuit Adjustable pick-up value current of the current- dependent overload release Operating voltage • rated value • at AC-3 rated value maximum Operating frequency rated value Operating current rated value Operating current • at AC-3 — at 400 V rated value Operating power • at AC-3 — at 230 V rated value	1.4 2 A 690 V 690 V 50 60 Hz 2 A 2 A
Number of poles for main current circuit Adjustable pick-up value current of the current- dependent overload release Operating voltage • rated value • at AC-3 rated value maximum Operating frequency rated value Operating current rated value Operating current • at AC-3 — at 400 V rated value Operating power • at AC-3 — at 230 V rated value — at 400 V rated value	1.4 2 A 690 V 690 V 50 60 Hz 2 A 2 A 370 W 750 W
Number of poles for main current circuit Adjustable pick-up value current of the current- dependent overload release Operating voltage • rated value • at AC-3 rated value maximum Operating frequency rated value Operating current rated value Operating current • at AC-3 — at 400 V rated value Operating power • at AC-3 — at 230 V rated value	1.4 2 A 690 V 690 V 50 60 Hz 2 A 2 A

at AC-3 maximum	15 1/h

Auxiliary circuit	
Design of the auxiliary switch	transverse
Number of NC contacts	
for auxiliary contacts	1
Number of NO contacts	
for auxiliary contacts	1
Number of CO contacts	
• for auxiliary contacts	0
Operating current of auxiliary contacts at AC-15	
● at 24 V	2 A
● at 120 V	0.5 A
● at 125 V	0.5 A
● at 230 V	0.5 A
Operating current of auxiliary contacts at DC-13	
● at 24 V	1 A
● at 60 V	0.15 A
Protective and monitoring functions	
Product function	
Ground fault detection	No
Phase failure detection	Yes
Trip class	CLASS 10
Design of the overload release	thermal
Operational short-circuit current breaking capacity (Ics) at AC	
• at 240 V rated value	100 kA
• at 400 V rated value	100 kA
● at 500 V rated value	100 kA
● at 690 V rated value	10 kA
Maximum short-circuit current breaking capacity (Icu)	
• at AC at 240 V rated value	100 kA
• at AC at 400 V rated value	100 kA
• at AC at 500 V rated value	100 kA
• at AC at 690 V rated value	10 kA
Breaking capacity short-circuit current (lcn)	
• at 1 current path at DC at 150 V rated value	10 kA
 with 2 current paths in series at DC at 300 V rated value 	10 kA
 with 3 current paths in series at DC at 450 V rated value 	10 kA
Response value current	
• of instantaneous short-circuit trip unit	26 A

UL/CSA ratings	
Full-load current (FLA) for three-phase AC motor	
• at 480 V rated value	2 A
• at 600 V rated value	2 A
Yielded mechanical performance [hp]	
 for single-phase AC motor 	
— at 230 V rated value	0.125 hp
 for three-phase AC motor 	
— at 460/480 V rated value	0.75 hp
— at 575/600 V rated value	1 hp
Contact rating of auxiliary contacts according to UL	C300 / R300

Short-circuit protection	
Product function Short circuit protection	Yes
Design of the short-circuit trip	magnetic
Design of the fuse link	
 for short-circuit protection of the auxiliary switch required 	Fuse gL/gG: 10 A, miniature circuit breaker C 6 A (short-circuit current lk < 400 A)

nstallation/ mounting/ dimensions		
Mounting position	any	
Mounting type	screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715	
Height	97 mm	
Width	45 mm	
Depth	96 mm	
Required spacing		
with side-by-side mounting		
— forwards	0 mm	
— Backwards	0 mm	
— upwards	50 mm	
— downwards	50 mm	
— at the side	0 mm	
• for grounded parts		
— forwards	0 mm	
— Backwards	0 mm	
— upwards	50 mm	
— at the side	30 mm	
— downwards	50 mm	
• for live parts		
— forwards	0 mm	
— Backwards	0 mm	
— upwards	50 mm	

— downwards	50 mm
— at the side	30 mm

Connections/Terminals	
Product function	
 removable terminal for auxiliary and control circuit 	No
Type of electrical connection	
for main current circuit	screw-type terminals
 for auxiliary and control current circuit 	screw-type terminals
Arrangement of electrical connectors for main current circuit	Top and bottom
Type of connectable conductor cross-sections	
• for main contacts	
— single or multi-stranded	2x (1 2,5 mm²), 2x (2,5 10 mm²)
 finely stranded with core end processing 	2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²
 at AWG conductors for main contacts 	2x (16 12), 2x (14 8)
Type of connectable conductor cross-sections	
 for auxiliary contacts 	
— single or multi-stranded	2x (0,5 1,5 mm²), 2x (0,75 2,5 mm²)
 finely stranded with core end processing 	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
 at AWG conductors for auxiliary contacts 	2x (20 16), 2x (18 14)
Tightening torque	
 for main contacts with screw-type terminals 	2 2.5 N·m
 for auxiliary contacts with screw-type terminals 	0.8 1.2 N·m
Design of screwdriver shaft	Diameter 5 to 6 mm
Size of the screwdriver tip	Pozidriv 2
Design of the thread of the connection screw	
• for main contacts	M4
 of the auxiliary and control contacts 	M3
Safety related data	
B10 value	
• with high demand rate acc. to SN 31920	5 000
Proportion of dangerous failures	
• with low demand rate acc. to SN 31920	50 %
• with high demand rate acc. to SN 31920	50 %
Failure rate [FIT]	

IEC 61508 Display version

• for switching status

• with low demand rate acc. to SN 31920

T1 value for proof test interval or service life acc. to

50 FIT

Handle

10 y

General Product Approval

For use in hazardous locations











		IFC

Declaration of	Test Certificates	Marine / Shipping
Conformity		



Type Test Certificates/Test Report

Special Test Certificate





other



Marine / Shipping









Confirmation



other Railway

Miscellaneous Vibration and Shock

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)


https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2021-1BA15


Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2021-1BA15


Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3RV2021-1BA15

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2021-1BA15&lang=en

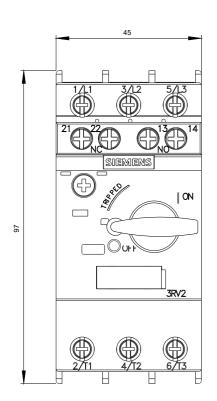

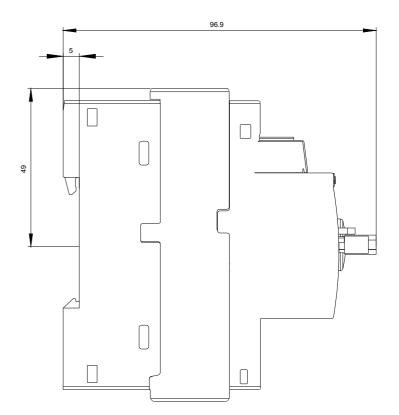

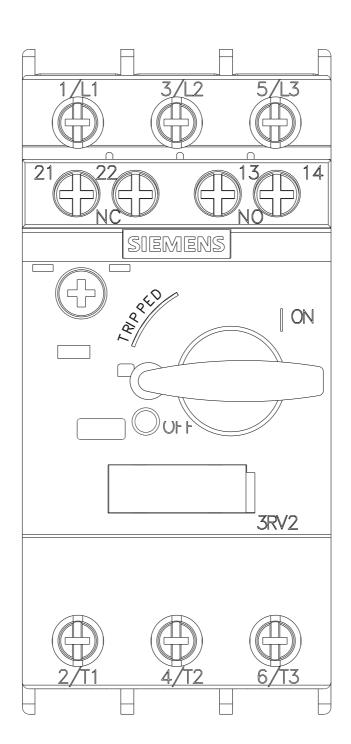

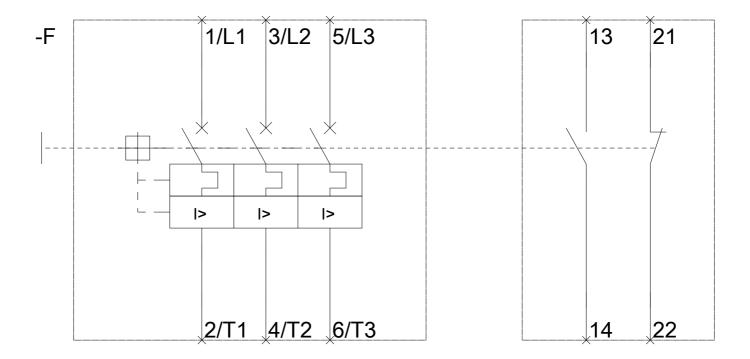

last modified: 10/13/2017