SIEMENS

Data sheet

3RW5235-2AC04

SIRIUS soft starter 200-480 V 143 A, 24 V AC/DC spring-type terminals Analog output



Figure similar

Product brand name	SIRIUS
Product category	Hybrid switching devices
Product designation	Soft starter
Manufacturer's article number	
• of HMI module usable	3RW5980-0HS00
 of HMI-Modul high-feature usable 	3RW5980-0HF00
 of communication module PROFINET standard usable 	<u>3RW5980-0CS00</u>
 of communication module PROFIBUS usable 	3RW5980-0CP00
• of communication module Modbus TCP usable	3RW5980-0CT00
 of circuit breaker usable at 400 V 	3VA2220-7MN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10
 of circuit breaker usable at 400 V at inside-delta circuit 	3VA2325-7MN32-0AA0; Type of coordination 1, Iq = 65 kA, CLASS 10
 of the gG fuse usable up to 690 V 	3NA3244-6; Type of coordination 1, Iq = 65 kA
 of the gG fuse usable at inside-delta circuit up to 500 V 	3NA3244-6; Type of coordination 1, Iq = 65 kA
 of full range R fuse link for semiconductor protection usable up to 690 V 	3NE1227-0; Type of coordination 2, Iq = 65 kA

• of back-up R fuse link for semiconductor protection usable up to 690 V

General technical data	
Starting voltage [%]	30 100 %
Start-up ramp time of soft starter	0 20 s
Product component	
 is supported HMI-Standard 	Yes
 is supported HMI-High Feature 	Yes
Product feature integrated bypass contact system	Yes
Number of controlled phases	3
Trip class	CLASS 10A (default) / 10E / 20E; acc. to IEC 60947-4-2
Insulation voltage	
 rated value 	600 V
Degree of pollution	3
Impulse voltage rated value	6 kV
Blocking voltage of the thyristor maximum	1 400 V
Service factor	1
Surge voltage resistance rated value	6 kV
maximum permissible voltage for safe isolation	
 between main and auxiliary circuit 	600 V
Protection class IP	IP00; IP20 with additional terminal covers for vertical touching from the front
Usage category acc. to IEC 60947-4-2	AC 53a
Shock resistance	15 g / 11 ms, from 12 g / 11 ms with potential contact lifting
Vibration resistance	15 mm to 6 Hz; 2g to 500 Hz
Reference code acc. to DIN EN 81346-2	Q
Product function	
 ramp-up (soft starting) 	Yes
 ramp-down (soft stop) 	Yes
Soft Torque	Yes
 Adjustable current limitation 	Yes
 pump ramp down 	Yes
 Intrinsic device protection 	Yes
 motor overload protection 	Yes; Electronic motor overload protection
 Evaluation of thermistor motor protection 	No
• inside-delta circuit	Yes
Auto-reset	Yes
Manual RESET	Yes
• remote reset	Yes; By turning off the control supply voltage
 communication function 	Yes
 via software configurable 	Yes
• firmware update	Yes

- removable terminal for control circuit
- analog output

Yes; 4 ... 20 mA (default) / 0 ... 10 V (parameterizable with High Feature HMI)

Power Electronics	
Operating current	
• at 40 °C rated value	143 A
• at 50 °C rated value	128 A
• at 60 °C rated value	118 A
Operating current at inside-delta circuit	
• at 40 °C rated value	248 A
• at 50 °C rated value	222 A
• at 60 °C rated value	204 A
Operating voltage	
 rated value 	200 480 V
 at inside-delta circuit rated value 	200 480 V
Relative negative tolerance of the operating voltage	-15 %
Relative positive tolerance of the operating voltage	10 %
Relative negative tolerance of the operating voltage at inside-delta circuit	-15 %
Relative positive tolerance of the operating voltage at inside-delta circuit	10 %
Operating power for three-phase motors	
 at 230 V at 40 °C rated value 	37 kW
 at 230 V at inside-delta circuit at 40 °C rated 	75 kW
value	
• at 400 V at 40 °C rated value	75 kW
 at 400 V at inside-delta circuit at 40 °C rated value 	132 kW
Operating frequency 1 rated value	50 Hz
Operating frequency 2 rated value	60 Hz
Relative negative tolerance of the operating frequency	-10 %
Relative positive tolerance of the operating frequency	10 %
Adjustable motor current	
• minimum	68 A
 at inside-delta circuit minimum 	118 A
Minimum load [%]	15 %; Relative to smallest settable le
Power loss [W] for rated value of the current at AC	
• at 40 °C to power-up	55 W
● at 50 °C to power-up	50 W
• at 60 °C to power-up	47 W
Control circuit/ Control	

Yes

Control supply voltage at AC 24 V • at 50 Hz rated value 24 V • at 60 Hz rated value 24 V Relative negative tolerance of the control supply voltage at AC at 50 Hz 20 % Relative positive tolerance of the control supply voltage at AC at 50 Hz 20 % Relative positive tolerance of the control supply voltage at AC at 60 Hz 20 % Relative positive tolerance of the control supply voltage at AC at 60 Hz 20 % Relative positive tolerance of the control supply voltage at AC at 60 Hz 20 % Relative positive tolerance of the control supply voltage frequency 50 60 Hz Relative positive tolerance of the control supply voltage frequency 10 % Control supply voltage 24 V Relative positive tolerance of the control supply voltage frequency 20 % Control supply voltage 20 % • at DC rated value 24 V Relative negative tolerance of the control supply voltage at DC 20 % Relative positive tolerance of the control supply voltage at DC 20 % Relative positive tolerance of the control supply voltage 20 % Voltage at DC 20 % Control supply current in standby mode rated value 160 mA Holding current in	Type of voltage of the control supply voltage	AC/DC
• at 50 Hz rated value 24 V • at 60 Hz rated value 24 V • at 60 Hz rated value 24 V Relative negative toierance of the control supply -20 % voltage at AC at 50 Hz 20 % Relative toierance of the control supply 20 % voltage at AC at 50 Hz 20 % Relative toierance of the control supply -20 % voltage at AC at 60 Hz 20 % Relative negative tolerance of the control supply -20 % voltage at AC at 60 Hz 20 % Control supply voltage frequency 50 60 Hz Relative negative tolerance of the control supply -10 % voltage frequency 50 60 Hz Relative negative tolerance of the control supply -10 % voltage frequency 24 V Relative positive tolerance of the control supply -20 % voltage at DC -20 % Control supply voltage -20 % e at DC rated value 24 V Relative positive tolerance of the control supply -20 % voltage at DC -20 % Control supply current in standby mode rated value 160 mA Holding cur		
a it 60 Hz rated value 24 V Relative negative tolerance of the control supply voltage at AC at 50 Hz 20 % Relative negative tolerance of the control supply voltage at AC at 50 Hz 20 % Relative negative tolerance of the control supply voltage at AC at 60 Hz 20 % Relative negative tolerance of the control supply voltage at AC at 60 Hz 20 % Control supply voltage frequency 50 60 Hz Relative negative tolerance of the control supply voltage frequency 10 % Relative negative tolerance of the control supply voltage frequency 10 % Relative negative tolerance of the control supply voltage frequency 10 % Relative negative tolerance of the control supply voltage frequency 20 % Control supply voltage 24 V Relative positive tolerance of the control supply voltage at DC 20 % Control supply current in standby mode rated value 160 mA Holding current in the by-pass mode operating rated value 380 mA Starting current at close of by-pass contact maximum innush current peak at connect of control supply 3.3 A Duration of innush current peak at connect of control supply voltage 2.1 ms Design of the overvoltage protection Varistor Design of short-circuit protection for control circuit		24 \/
Relative negative tolerance of the control supply voltage at AC at 50 Hz -20 % Relative positive tolerance of the control supply voltage at AC at 50 Hz 20 % Relative positive tolerance of the control supply voltage at AC at 60 Hz -20 % Relative positive tolerance of the control supply voltage at AC at 60 Hz -20 % Relative negative tolerance of the control supply voltage frequency 50 60 Hz Relative negative tolerance of the control supply voltage frequency 10 % Relative negative tolerance of the control supply voltage frequency 10 % Relative negative tolerance of the control supply voltage frequency 10 % Relative negative tolerance of the control supply voltage frequency 20 % Relative negative tolerance of the control supply voltage at DC 20 % Relative negative tolerance of the control supply voltage at DC 20 % Control supply current in standby mode rated value 160 mA Holding current in the by-pass mode operating rated value 380 mA Starting current at close of by-pass contact maximum 7.6 A Duration of inrush current peak at connect of control supply voltage not inrush current peak at connect of control supply voltage 2.1 ms Design of the overvoltage protection Varistor Design of short-circuit protection for control circuit torus torus current peak at connect of control circuit supply voltage 4 Å gG fuse (Icu=1 kA), 6 Å quick-acting fus		
voltage at AC at 50 Hz 20 % Relative positive tolerance of the control supply voltage at AC at 60 Hz 20 % Relative negative tolerance of the control supply voltage at AC at 60 Hz -20 % Relative positive tolerance of the control supply voltage at AC at 60 Hz -20 % Relative positive tolerance of the control supply voltage at AC at 60 Hz -0 % Control supply voltage frequency 50 60 Hz Relative negative tolerance of the control supply voltage frequency -10 % Relative positive tolerance of the control supply voltage frequency -0 % Control supply voltage • at DC rated value 24 V Relative negative tolerance of the control supply voltage at DC -20 % Relative negative tolerance of the control supply voltage at DC -20 % Control supply current in standby mode rated value 160 mA Relative positive tolerance of the control supply voltage at DC 380 mA Control supply current in the by-pass mode operating rated value 3.3 A Starting current in the by-pass contact maximum inrush current peak at connect of control supply voltage maximum 7.6 A Duration of inrush current peak at connect of control supply voltage maximum 2.1 ms Design of the overvoltage protection		
voltage at AC at 50 Hz -20 % Relative negative tolerance of the control supply -20 % Relative positive tolerance of the control supply 20 % Control supply voltage frequency 50 60 Hz Relative positive tolerance of the control supply -10 % Voltage frequency -10 % Relative negative tolerance of the control supply -10 % voltage frequency -10 % Relative negative tolerance of the control supply -0 % voltage frequency -20 % Relative negative tolerance of the control supply -0 % voltage frequency -0 % Relative negative tolerance of the control supply -20 % voltage at DC -20 % Relative negative tolerance of the control supply -20 % voltage at DC -20 % Control supply current in standby mode rated value 160 mA Holding current in the by-pass mode operating rated 380 mA Starting current at close of by-pass contact maximum 7.6 A Inrush current peak at connect of control supply -21 ms Duration of inrush current peak at connect of control supply -21 ms Design of short-circuit protect	voltage at AC at 50 Hz	-20 %
voltage at AC at 60 Hz 20 % Relative positive tolerance of the control supply voltage at AC at 60 Hz 20 % Control supply voltage frequency 50 60 Hz Relative negative tolerance of the control supply voltage frequency -0 % Relative positive tolerance of the control supply voltage frequency 10 % Relative positive tolerance of the control supply voltage frequency 24 V Control supply voltage at DC 20 % Relative positive tolerance of the control supply voltage at DC 20 % Relative positive tolerance of the control supply voltage at DC 20 % Relative positive tolerance of the control supply voltage at DC 20 % Control supply current in standby mode rated value 160 mA Holding current at close of by-pass contact maximum 7.6 A Inrush current peak at connect of control supply voltage maximum 12.1 ms Duration of innush current peak at connect of control supply voltage maximum 12.1 ms Duration of innush current peak at connect of control circuit 4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply	Relative positive tolerance of the control supply voltage at AC at 50 Hz	20 %
voltage at AC at 60 Hz 50 60 Hz Control supply voltage frequency 50 60 Hz Relative negative tolerance of the control supply voltage frequency -10 % Relative positive tolerance of the control supply voltage frequency 10 % Control supply voltage • at DC rated value 24 V Relative negative tolerance of the control supply voltage at DC -20 % Relative positive tolerance of the control supply voltage at DC 20 % Control supply current in standby mode rated value 160 mA Holding current in the by-pass mode operating rated value 380 mA Starting current at close of by-pass contact maximum 7.6 A Duration of inrush current peak at connect of control supply voltage 12.1 ms Duration of inrush current peak at connect of control supply voltage Varistor Design of short-circuit protection for control circuit 4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply	Relative negative tolerance of the control supply voltage at AC at 60 Hz	-20 %
Relative negative tolerance of the control supply -10 % Relative positive tolerance of the control supply 10 % Control supply voltage 10 % • at DC rated value 24 V Relative negative tolerance of the control supply -20 % voltage at DC -20 % Relative positive tolerance of the control supply -20 % voltage at DC -20 % Relative positive tolerance of the control supply -20 % voltage at DC -20 % Control supply current in standby mode rated value 160 mA Holding current in the by-pass mode operating rated value 380 mA Starting current at close of by-pass contact maximum 7.6 A Inrush current peak at connect of control supply voltage 3.3 A Duration of inrush current peak at connect of control supply voltage 21.1 ms supply voltage Varistor Design of short-circuit protection for control circuit 4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply mputs/ Outputs	Relative positive tolerance of the control supply voltage at AC at 60 Hz	20 %
voltage frequency 10 % Relative positive tolerance of the control supply voltage frequency 10 % Control supply voltage • at DC rated value 24 V Relative negative tolerance of the control supply voltage at DC -20 % Relative positive tolerance of the control supply voltage at DC 20 % Relative positive tolerance of the control supply voltage at DC 20 % Control supply current in standby mode rated value 160 mA Holding current in the by-pass mode operating rated value 380 mA Starting current at close of by-pass contact maximum 7.6 A Inrush current peak at connect of control supply voltage maximum 3.3 A Duration of inrush current peak at connect of control supply voltage 12.1 ms Design of the overvoltage protection Varistor Design of short-circuit protection for control circuit 4 A gG fuse (lcu=1 kA), 6 A quick-acting fuse (lcu=1 kA), C1 miniature circuit breaker (lcu= 600 A), C6 miniature circuit breaker (lcu= 300 A); Is not part of scope of supply mputs/ Outputs Tot part of scope of supply	Control supply voltage frequency	50 60 Hz
voltage frequency	Relative negative tolerance of the control supply voltage frequency	-10 %
• at DC rated value 24 V Relative negative tolerance of the control supply voltage at DC -20 % Relative positive tolerance of the control supply voltage at DC 20 % Control supply current in standby mode rated value 160 mA Holding current in the by-pass mode operating rated value 380 mA Starting current at close of by-pass contact maximum 7.6 A Inrush current peak at connect of control supply voltage 3.3 A Duration of inrush current peak at connect of control supply voltage 12.1 ms Design of the overvoltage protection Varistor Design of short-circuit protection for control circuit 4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply nputs/ Outputs	Relative positive tolerance of the control supply voltage frequency	10 %
Relative negative tolerance of the control supply voltage at DC -20 % Relative positive tolerance of the control supply voltage at DC 20 % Control supply current in standby mode rated value 160 mA Holding current in the by-pass mode operating rated value 380 mA Starting current at close of by-pass contact maximum 7.6 A Inrush current peak at connect of control supply voltage 3.3 A Duration of inrush current peak at connect of control supply voltage 12.1 ms Design of the overvoltage protection Varistor Design of short-circuit protection for control circuit 4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply	Control supply voltage	
voltage at DC20 %Relative positive tolerance of the control supply voltage at DC20 %Control supply current in standby mode rated value160 mAHolding current in the by-pass mode operating rated value380 mAStarting current at close of by-pass contact maximum voltage maximum7.6 AInrush current peak at connect of control supply voltage3.3 ADuration of inrush current peak at connect of control supply voltage12.1 msDesign of the overvoltage protection Design of short-circuit protection for control circuit4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 300 A); Is not part of scope of supplynputs/ Outputs300 A);	• at DC rated value	24 V
voltage at DC160 mAControl supply current in standby mode rated value160 mAHolding current in the by-pass mode operating rated value380 mAStarting current at close of by-pass contact maximum Inrush current peak at connect of control supply voltage maximum7.6 ADuration of inrush current peak at connect of control supply voltage12.1 msDesign of the overvoltage protectionVaristorDesign of short-circuit protection for control circuit4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply	Relative negative tolerance of the control supply voltage at DC	-20 %
Holding current in the by-pass mode operating rated value380 mAStarting current at close of by-pass contact maximum Inrush current peak at connect of control supply voltage maximum7.6 AInrush current peak at connect of control supply voltage maximum3.3 ADuration of inrush current peak at connect of control supply voltage12.1 msDesign of the overvoltage protectionVaristorDesign of short-circuit protection for control circuit4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply	Relative positive tolerance of the control supply voltage at DC	20 %
valueT.6 AInrush current peak at connect of control supply voltage maximum3.3 ADuration of inrush current peak at connect of control supply voltage12.1 msDesign of the overvoltage protectionVaristorDesign of short-circuit protection for control circuit4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply	Control supply current in standby mode rated value	160 mA
Inrush current peak at connect of control supply voltage maximum 3.3 A Duration of inrush current peak at connect of control supply voltage 12.1 ms Design of the overvoltage protection Varistor Design of short-circuit protection for control circuit 4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply nputs/ Outputs Nutputs	Holding current in the by-pass mode operating rated value	380 mA
voltage maximum 12.1 ms Duration of inrush current peak at connect of control supply voltage 12.1 ms Design of the overvoltage protection Varistor Design of short-circuit protection for control circuit 4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply nputs/ Outputs Imputs/ Outputs	Starting current at close of by-pass contact maximum	7.6 A
supply voltage Varistor Design of short-circuit protection for control circuit 4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply nputs/ Outputs	Inrush current peak at connect of control supply voltage maximum	3.3 A
Design of short-circuit protection for control circuit 4 A gG fuse (Icu=1 kA), 6 A quick-acting fuse (Icu=1 kA), C1 miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply nputs/ Outputs	Duration of inrush current peak at connect of control supply voltage	12.1 ms
miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker (Icu= 300 A); Is not part of scope of supply	Design of the overvoltage protection	Varistor
	Design of short-circuit protection for control circuit	miniature circuit breaker (Icu= 600 A), C6 miniature circuit breaker
	Inputs/ Outputs	
	Number of digital inputs	1

Number of digital inputs	1
Number of digital outputs	3
 not parameterizable 	2
Digital output version	2 normally-open contacts (NO) / 1 changeover contact (CO)
Number of inputs for thermistor connection	0
Number of analog outputs	1
Switching capacity current of the relay outputs	
• at AC-15 at 250 V rated value	3 A
• at DC-13 at 24 V rated value	1 A

Installation/ mounting/ dimensions	
Mounting position	with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back
Mounting type	screw fixing
Height	306 mm
Width	185 mm
Depth	203 mm
Required spacing with side-by-side mounting	
• forwards	10 mm
Backwards	0 mm
• upwards	100 mm
 downwards 	75 mm
• at the side	5 mm
Installation altitude at height above sea level	5 000 m; Derating as of 1000 m, see catalog
maximum	
Weight without packaging	6.6 kg
Connections/Terminals	
Type of electrical connection	
 for main current circuit 	screw-type terminals
 for control circuit 	spring-loaded terminals
Type of connectable conductor cross-sections	
 for DIN cable lug for main contacts stranded 	2x (16 95 mm²)
 for DIN cable lug for main contacts finely stranded 	2x (25 120 mm²)
Type of connectable conductor cross-sections at AWG conductors for control circuit	
• solid	2x (24 16)
 finely stranded with core end processing 	2x (24 16)
Wire length	
 between soft starter and motor maximum 	800 m
 at the digital inputs at AC maximum 	100 m
 at the digital inputs at DC maximum 	1 000 m
Ambient conditions	
Ambient temperature	
 during operation 	-25 +60 °C
 during storage and transport 	-40 +80 °C
Environmental category	
 during operation acc. to IEC 60721 	3K6 (no ice formation, only occasional condensation), 3C3 (no salt mist), 3S2 (sand must not get into the devices), 3M6
• during storage acc. to IEC 60721	1K6 (only occasional condensation), 1C2 (no salt mist), 1S2 (sand must not get inside the devices), 1M4
 during transport acc. to IEC 60721 	2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)

EMC emitted interference acc. to IEC 60947-1

CISPR11, ambience A (industrial sector)

Yes Yes Yes Type: Class RK5 / K5, max. 350 A; Standard fault, Iq = 10 kA Type: Class RK5 / K5, max. 350 A
Yes Yes Type: Class RK5 / K5, max. 350 A; Standard fault, Iq = 10 kA
Yes Yes Type: Class RK5 / K5, max. 350 A; Standard fault, Iq = 10 kA
Yes Type: Class RK5 / K5, max. 350 A; Standard fault, Iq = 10 kA
Type: Class RK5 / K5, max. 350 A; Standard fault, Iq = 10 kA
Type: Class RK5 / K5, max. 350 A
40 hp
40 hp
100 hp
75 hp
75 hp
150 hp
R300-B300
Declaration of other Conformity
Confirmation
4 7 1

Further information

Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW5235-2AC04

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW5235-2AC04


Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3RW5235-2AC04


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) $http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW5235-2AC04\& lang=enderset and the set of the se$


Characteristic: Tripping characteristics, I²t, Let-through current https://support.industry.siemens.com/cs/ww/en/ps/3RW5235-2AC04/char

Characteristic: Installation altitude

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RW5235-2AC04&objecttype=14&gridview=view1

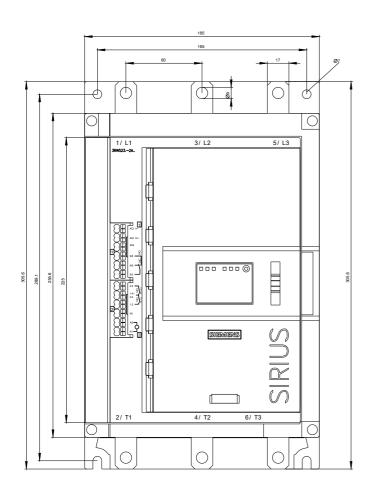

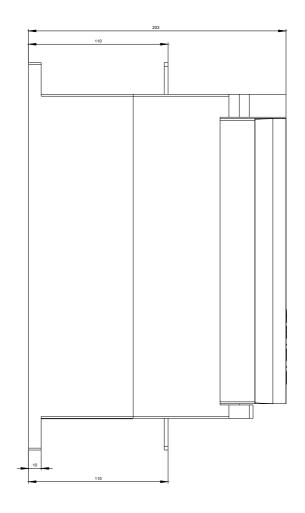

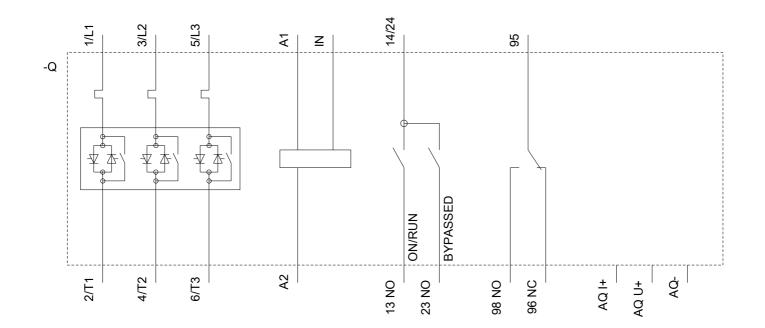

last modified:

07/04/2018