

MLFB-Ordering data

6SL3210-1KE17-5AF1



Figure similar

Client order no. :	Item no. :
Order no. :	Consignment no. :
Offer no. :	Project :
Damas eles .	

Remarks :	'	Toject .		
Rated data		General tech. specifications		
Input		Power factor λ	0.7	0 0.85
Number of phases	3 AC	Offset factor cos φ	0.9	5
Line voltage	380 480 V +10 % -20 %	Efficiency η	0.9	7
Line frequency	47 63 Hz	Sound pressure level (1m)	52	dB
Rated current (LO)	9.50 A	Power loss	0.1	4 kW
Rated current (HO)	8.20 A	Ambient conditions		
Output		Allibleii	Condition	15
Number of phases	3 AC	Cooling	Air cooling	g using an integrated fan
Rated voltage	400 V	Cooling air requirement	0 005 m³/	's (0.177 ft³/s)
Rated power IEC 400V (LO)	3.00 kW	Installation altitude		
Rated power NEC 480V (LO)	4.00 hp	Ambient temperature	1000 m (3	3280.84 ft)
Rated power IEC 400V (HO)	2.20 kW	·		
Rated power NEC 480V (HO)	3.00 hp	Operation		°C (14 104 °F)
Rated current (IN)	7.50 A	Transport		°C (-40 158 °F)
Rated current (LO)	7.30 A	Storage	-40 70 °	°C (-40 158 °F)
Rated current (HO)	5.60 A	Relative humidity		
Max. output current	11.20 A	95 % At 40 °C (104 °F), conde Max. operation and icing not permissible		
Pulse frequency	4.000 kHz			
Output frequency for vector control	0 240 Hz	Closed-loop c	ontrol tech	nniques
Output frequency for V/f control	0 550 Hz	V/f linear / square-law / paramet	erizable	Yes
		V/f with flux current control (FC	C)	Yes
		V/f ECO linear / square-law		Yes
Overload capability		Sensorless vector control		Yes
Low Overload (LO) 150 % base load current IL for 3 s, followed by 110 % base load current IL for 57 s in a 300 s cycle time		Vector control, with sensor		No
		Encoderless torque control		No
High Overload (HO)		Torque control, with encoder		No
200 %	450 %	_		

300 s cycle time

200 % base load current IH for 3 s, followed by 150 % base load current IH for 57 s in a

Communication

PROFINET / EtherNet/IP

Communication



MLFB-Ordering data

6SL3210-1KE17-5AF1



03	L3210 IRE17 3/111		Figure similar	
Mechanical data		Connections		
Degree of protection	IP20 / UL open type	Signal cable		
Size	FSA	Conductor cross-section	0.15 1.50 mm² (AWG 24 AWG 16)	
Net weight	1.70 kg (3.75 lb)	Line side		
Width	73 mm (2.87 in)	Version	Plug-in screw terminals	
Height	196 mm (7.72 in)	Conductor cross-section	1.00 2.50 mm² (AWG 18 AWG 14)	
Depth	225 mm (8.86 in)	Motor end		
Inputs / out	tputs	Version	Plug-in screw terminals	
Standard digital inputs		Conductor cross-section	1.00 2.50 mm² (AWG 18 AWG 14)	
Number	6	DC link (for braking resistor)		
Switching level: 0→1	11 V	Version	Plug-in screw terminals	
Switching level: 1→0	5 V	Conductor cross-section	1.00 2.50 mm² (AWG 18 AWG 14)	
Max. inrush current	15 mA	Line length, max.	15 m (49.21 ft)	
Fail-safe digital inputs		PE connection	On housing with M4 screw	
Number	1	Max. motor cable length		
Digital outputs		Shielded	150 m (492.13 ft)	
Number as relay changeover contact	1	Unshielded	150 m (492.13 ft)	
Output (resistive load)	DC 30 V, 0.5 A	Standards		
Number as transistor	1	Compliance with standards	UL, cUL, CE, C-Tick (RCM)	
Output (resistive load)	DC 30 V, 0.5 A		FMC Divertive 2004/100/FC Levy Veltage	
Analog / digital inputs		CE marking	EMC Directive 2004/108/EC, Low-Voltage Directive 2006/95/EC	
Number	1 (Differential input)			
Resolution	10 bit			
Switching threshold as digital in	put			
0→1	4 V			
1→0	1.6 V			

Number

Analog outputs

1 (Non-isolated output)

PTC/ KTY interface

1 motor temperature sensor input, sensors that can be connected: PTC, KTY and Thermo-Click, accuracy $\pm 5~^{\circ}\text{C}$




MLFB-Ordering data

6SL3210-1KE17-5AF1

Figure similar

Converter losses to EN 50598-2*

Efficiency class	IE2
Comparison with the reference converter (90% / 100%)	-68.30 %

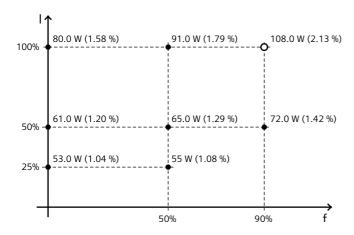

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard EN 50598) of the relative torque generating current (I) over the relative motor stator frequency(f). The values are valid for the basic version of the converter without options/components.

^{*}converted values