

MLFB-Ordering data

6SL3210-1NE23-2AG1



Figure similar

Client order no. :

Order no. :

Offer no. :

Remarks :

Item no. :

Consignment no. :

Project :

Rated data		General tech. specifications	
Input		Power factor λ	0.90
Number of phases	3 AC	Offset factor $\cos \varphi$	0.95
Line voltage	380 ... 480 V ± 10 %	Efficiency η	0.97
Line frequency	47 ... 63 Hz	Sound pressure level (1m)	65 dB
Rated current (LO)	33.10 A	Power loss	0.35 kW
Rated current (HO)	27.00 A	Ambient conditions	
Output		Cooling	Internal air cooling
Number of phases	3 AC	Cooling air requirement	0.019 m ³ /s
Rated voltage	400 V	Installation altitude	1000 m
Rated power (LO)	15.00 kW / 20.00 hp	Ambient temperature	
Rated power (HO)	11.00 kW / 15.00 hp	Operation LO	-10 ... 40 °C (14 ... 104 °F)
Rated current (LO)	32.00 A	Operation HO	-10 ... 50 °C (14 ... 122 °F)
Rated current (HO)	26.00 A	Transport	-40 ... 70 °C (-40 ... 158 °F)
Max. output current	52.00 A	Storage	-40 ... 70 °C (-13 ... 131 °F)
Pulse frequency	4 kHz	Relative humidity	
Output frequency for vector control	0 ... 200 Hz	Max. operation	95 % RH, condensation not permitted
Output frequency for V/f control	0 ... 550 Hz		

Overload capability

Low Overload (LO)

1.1 x rated output current (i.e. 110 % overload) for 57 s with a cycle time of 300 s 1.5 x rated output current (i.e. 150 % overload) for 3 s with a cycle time of 300 s

High Overload (HO)

1.5 x output current rating (i.e., 150 % overload) for 57 s with a cycle time of 300 s 2 x output current rating (i.e., 200 % overload) for 3 s with a cycle time of 300 s

SIEMENS

Data sheet for SINAMICS Power Module PM230


MLFB-Ordering data

6SL3210-1NE23-2AG1



Mechanical data	Connections
Degree of protection	Line side
Size	Version
Net weight	Conductor cross-section
Width	Motor end
Height	Version
Depth	Conductor cross-section
Converter losses to EN 50598-2*	

Efficiency class	IE2
Comparison with the reference converter (90% / 100%)	-68.73 %

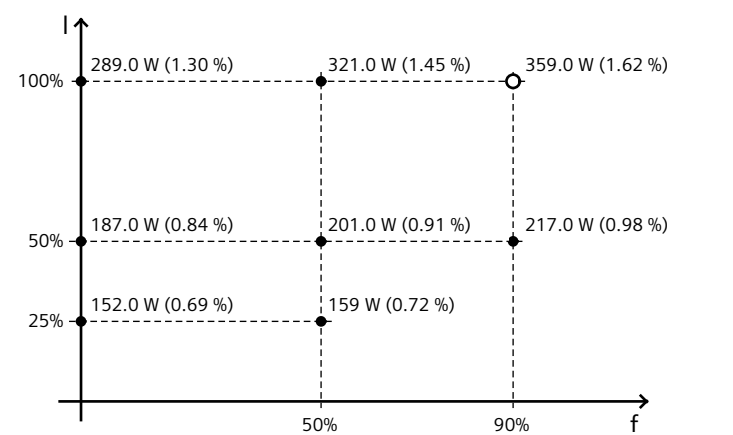

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard EN 50598) of the relative torque generating current (I) over the relative motor stator frequency(f). The values are valid for the basic version of the converter without options/components.

*calculated values; increased by 10% according to the standard

Connections	
Line side	
Version	Plug-in screw terminals
Conductor cross-section	6.00 ... 16.00 mm²
Motor end	
Version	Plug-in screw terminals
Conductor cross-section	6.00 ... 16.00 mm²

Max. motor cable length	
Shielded	25 m
Unshielded	100 m

Standards	
Compliance with standards	UL, CE, C-Tick (RCM), KCC
CE marking	Low-voltage directive 2006/95/EC