

MLFB-Ordering data

6SL3223-0DE21-5AG1



Figure similar

Client order no. :

Order no. :

Offer no. :

Remarks :

Item no. :

Consignment no. :

Project :

Rated data		General tech. specifications	
Input		Power factor λ	0.90
Number of phases	3 AC	Offset factor $\cos \varphi$	0.95
Line voltage	380 ... 480 V ± 10 %	Efficiency η	0.95
Line frequency	47 ... 63 Hz	Sound pressure level (1m)	62 dB
Rated current (LO)	4.20 A	Power loss	0.08 kW
Rated current (HO)	3.20 A	Ambient conditions	
Output		Cooling	Internal air cooling
Number of phases	3 AC	Cooling air requirement	0.007 m ³ /s
Rated voltage	400 V	Installation altitude	1000 m
Rated power (LO)	1.50 kW / 2.00 hp	Ambient temperature	
Rated power (HO)	1.10 kW / 1.50 hp	Operation LO	-10 ... 40 °C (14 ... 104 °F)
Rated current (LO)	4.10 A	Operation HO	-10 ... 50 °C (14 ... 122 °F)
Rated current (HO)	3.10 A	Transport	-40 ... 70 °C (-40 ... 158 °F)
Max. output current	6.20 A	Storage	-25 ... 55 °C (-13 ... 131 °F)
Pulse frequency	4 kHz	Relative humidity	
Output frequency for vector control	0 ... 200 Hz	Max. operation	95 % RH, condensation not permitted
Output frequency for V/f control	0 ... 550 Hz		

Overload capability

Low Overload (LO)

1.1 x rated output current (i.e. 110 % overload) for 57 s with a cycle time of 300 s 1.5 x rated output current (i.e. 150 % overload) for 3 s with a cycle time of 300 s

High Overload (HO)

1.5 x output current rating (i.e., 150 % overload) for 57 s with a cycle time of 300 s 2 x output current rating (i.e., 200 % overload) for 3 s with a cycle time of 300 s

SIEMENS

Data sheet for SINAMICS Power Module PM230


MLFB-Ordering data

6SL3223-0DE21-5AG1



Mechanical data		Connections	
Degree of protection	IP55 / UL type 12	Line side	
Size	FSA	Version	Plug-in screw terminals
Net weight	4.30 kg	Conductor cross-section	1.00 ... 2.50 mm²
Width	154.0 mm	Motor end	
Height	460.0 mm	Version	Plug-in screw terminals
Depth	249.0 mm	Conductor cross-section	1.00 ... 2.50 mm²
Converter losses to EN 50598-2*			

Efficiency class	IE2
Comparison with the reference converter (90% / 100%)	-72.59 %

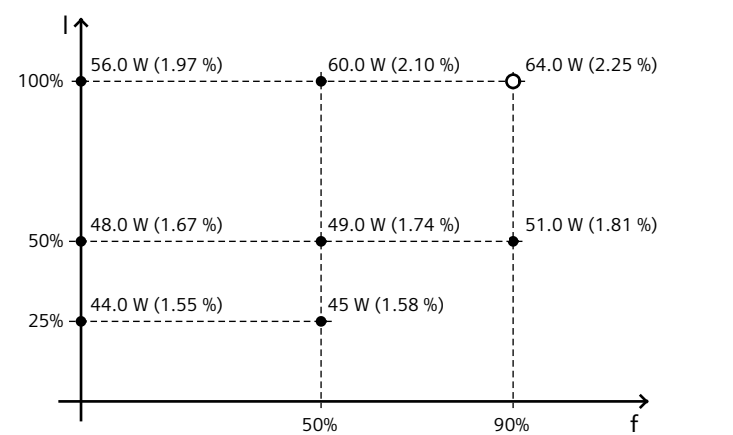

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard EN 50598) of the relative torque generating current (I) over the relative motor stator frequency(f). The values are valid for the basic version of the converter without options/components.

*converted values

Connections
Line side
Version
Conductor cross-section
Motor end
Version
Conductor cross-section

Max. motor cable length
Shielded
Unshielded

Standards
Compliance with standards
CE marking