## SIEMENS

## **Product data sheet**


## 8WD4420-5DD




SIGNALLING COLUMN ROTATING-BEACON YELLOW, 24V AC/DC

Product brand name		SIRIUS
product designation		signaling columns element, optica
Product component / fluorescent materials	_	Yes
Design of the optical signal	_	rotating light
Type of voltage	_	
of the operating voltage		AC/DC
of the supply voltage		
of the fluorescent material		AC/DC
Operating frequency	_	
• 1 / rated value	Hz	50
• 2 / rated value	Hz	60
Operating voltage	_	
• 1 / for DC / rated value	V	24
• 1 / at 50 Hz / for AC / rated value	V	24
• 1 / at 60 Hz / for AC / rated value	V	24
Consumed current / for rated value of supply voltage	mA	70
Supply voltage		
$\bullet$ 1 / of the fluorescent material / at 50 Hz / for AC / rated value	V	24
• 1 / of the fluorescent material / at 60 Hz / for AC / rated value	V	24

• 1 / of the fluorescent material / for DC / rated value	V	24	
Item designation	_		
<ul> <li>according to DIN 40719 extendable after IEC 204-2 / according to IEC 750</li> </ul>		н	
according to DIN EN 61346-2		Ρ	
Mechanical design:			
Color / of the optical signal element		yellow	
External diameter / of the signal column element	mm	70	
Lamp:			
Nature of fluorescent material		LED	
Ambient conditions:			
Ambient temperature			
during operating	°C	-20 50	
Protection class IP	_	IP65	
Depth	mm	70	
Height	mm	56	
Width	mm	70	
Certificates/approvals:			
General Product Approval Shipping Approval		other	
ROSTEST UL UL UL UL UL UL UL UL UL UL UL UL UL		<u>Manufacturer</u>	
Information- and Downloadcenter (Catalogs, Brochures,)			
http://www.siemens.com/industrial-controls/catalogs			
Industry Mall (Online ordering system) http://www.siemens.com/industrial-controls/mall			
Cax online generator: http://www.siemens.com/cax			
Service&Support (Manuals, Certificates, Characteristics, FAQs, http://support.automation.siemens.com/WW/view/en/8WD4420-5DD/			
Image database (product images, 2D dimension drawings, 3D mehttp://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8WD4		circuit diagrams,)	

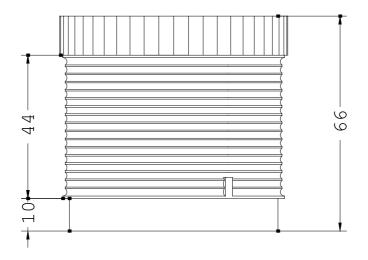

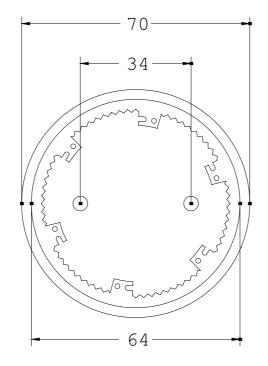

last change:

Nov 4, 2011