


Datablad | Varenummer: 2273-500

Monteringsholder; til stik i 1 og 2 rækker; Serie 2273; til DIN 35-skinne monteret/ skrue monteret; orange

<https://www.wago.com/2273-500>

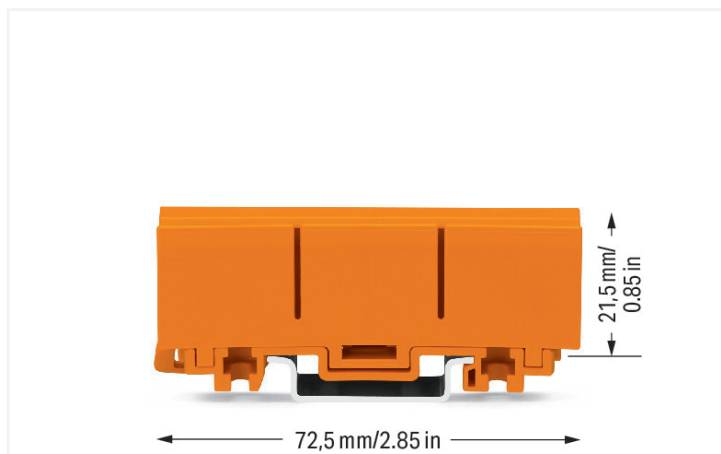

Farve: ■ orange



Notes

Note

En enkelt holder kan indholde op til 24 klemenheder på meget trang plads. Tidligere var dette kun muligt ved brug af skinnemonterede rækkeklammer.

Fordele:

- Holderen monteres på DIN 35-skinne eller med skruer - let og hurtigt
- Få plads til 3 stk 2,5 mm² serie 2273-stik i en enkelt holder
- Udskift let stik
- Stort opmærkningsområde til selvkæbende strimler eller til direkte opmærkning med permanent tusch

Geometrische Daten

Bredde	18,5 mm / 0.728 tommer
Højde	72,5 mm / 2.854 tommer
Dybde fra øvre kant af DIN-skinne	21,5 mm / 0.846 tommer

Mekaniske data

Montagetype	DIN 35-skinne Skrue monteret
Passende	for single- and double-row connectors (2273 Series)

Materiale Data (engelsk)

Note på materiel data

[Information on material specifications can be found here](#)

Farve	orange
Brand last	0.31 MJ
Vægt	10.7 g



Kommercielle data	
Product Group	7 (Push Wire Conn.)
eCl@ss 10.0	27-14-11-92
eCl@ss 9.0	27-14-11-92
ETIM 8.0	EC002848
ETIM 7.0	EC002848
PU (SPU)	50 (10) Stykke
Emballage type	Box
Oprindelsesland	DE
GTIN	4050821101871
Told tarifnummer	39269097900

Godkendelser / certifikater

Godkendelser til marineapplikationer



Godkendelse	Yderligere godkendelsestekst	Certifikatnavn
DNV GL Det Norske Veritas, Germanischer Lloyd	EN 60998	TAE000015T

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 2273-500

↓

Documentation			
Bid Text			
2273-500	19.02.2019	xml 2.58 KB	↓
2273-500	17.05.2017	doc 23.50 KB	↓
ausschreiben.de 2273-500			↓

CAD/CAE-Data

CAD data	
2D/3D Models 2273-500	



CAE data	
EPLAN Data Portal 2273-500	
WSCAD Universe 2273-500	
ZUKEN Portal 2273-500	

1 Kompatible produkter
1.1 Valgfrit tilbehør
1.1.1 Opmærkning
1.1.1.1 Opmærkningsstrimmel




Artikelnr.: 210-834
Opmærkningsstrimler; på spole; 5 mm
bred; almindelig; selvklæbende; hvid

Betjeningsvejledning



The mounting carrier is suitable for both connector heights.

To adjust the mounting carrier, unlock the latch via operating tool (5.5 mm blade) and move the clamping slide to the required width by rotating the tool.



The mounting carrier is suitable for both connector widths and can be adjusted by unlocking the latch via operating tool (5.5 mm blade) and moving the clamping slide to the required width by rotating the tool.

The mounting carrier is suitable for both connector widths.