


Accessories

Connecting pipe

Description S1W-M12A8/BW-2PU

Article number **6075689086**

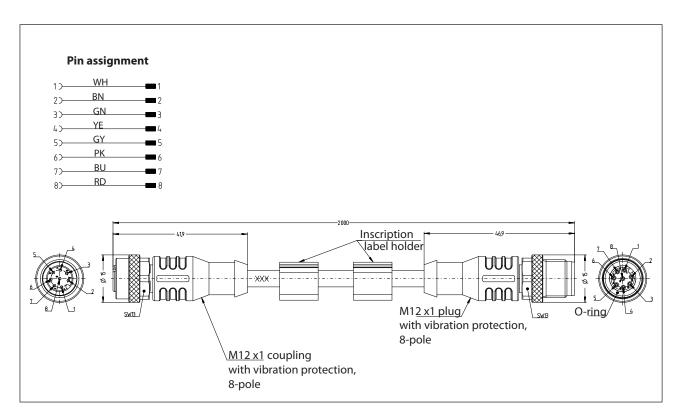

Electrical Data	
Operating voltage	max. 30 V
Current rating	2 A at 40 °C
Insulation resistancw	≥100 MΩ

Mechanical Data	
Connection	M12x1, 8-pole (A-Coded)
Cable	LiF9YH-11YH 8 x 0,25 mm ² x 2 m +50 mm, outer-jacket PUR UL, black
Overmolding	TPU
Ambient temperature	-30 °C +90 °C
Degree of pollution	3
Type of protection	IP68 (only in fully snapped-in position with it's plugs)