



New

| Guard One

Air curtain for small entrances

Modern unique design
Plug&Play - built-in automatics
Silent work
Effective barrier



sonniger.com

Guard One new

more at
sonniger.com



manual

GUARD ONE AIR CURTAIN		
TECHNICAL PARAMETERS		
		GUARD ONE 100C
index		CG0028
unit length	m	1,1
maximum effective range	m	2,9
heat output	kW	-
air output	m ³ /h	1200/1600/2100
sound level	dB A	43/48/56
unit weight	kg	11,7
power supply parameters V/Hz 230/50	W/A	100/0,7
		GUARD ONE 100E
		CG0029 coming soon
unit length	m	1,1
maximum effective range	m	2,5
heat output	kW	3
air output	m ³ /h	1050/1400/1950
sound level	dB A	42/46/56
unit weight	kg	12,9
power supply parameters V/Hz 230/50	W/A	100/0,7

Functions



Plug & Play

- ready to work
- built-in automatics
- power cord and holders included




Motion sensor


- built-in solution
- adjustable range
- on/off switch

Air flow range

(maximum installation height)

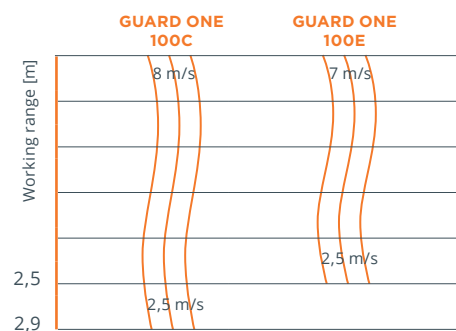

Automatics

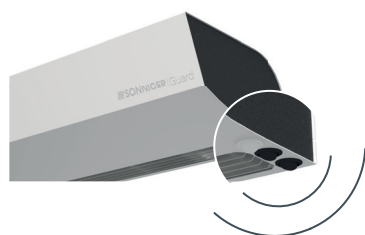

Built-in controls


- motion sensor
- min/max speed
- heater switch (only in E version)



Panel Comfort option (WAA0054N)

- unique SONNIGER design
- min/mid/max speed
- built-in thermostat
- control up to 5 units

Dimensions

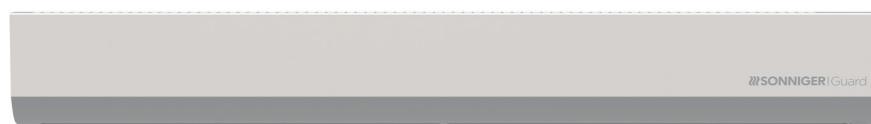

1100 mm



281 mm

155 mm



Easy
installation



Plug & Play



Silent work
Effective barrier



Built-in
motion sensor



Best
price