

ECO-S Line Positioners

Welding Positioner ECO-S100

Features

- Tilting range up to 90° manually infinitely adjustable via crank handle
- Foot switch Start/Stop.
- Switch for cw/ccw turning.
- Rotation time adjustable.
- The turntable speed is adjustable from 0,5 to 5 U/min.
- Controlling of the welding machine by integ. control system
- 350A ground connection



Model	ECO S100
Supply voltage	1PH/230 V – 50/60 Hz DC PCB
Rotation motor	125 W
hollow shaft ø	45 mm
Tilting range	0° - 90°
Worktable diameter	400 mm
Rotation speed	0,5 - 5 rpm
Max. horizont load	100 kg
Max. vertical load	50 kg
Tilting methode	manuell
horizontal height	505 mm
Center height of tilt	390 mm
Weight	55 kg
Item no.	02.30.01.00010

Scope of delivery:

- 1 control system (integ.)
- 1 Foot switch

ECO-S Line Positioners

Welding Positioner ECO-S100


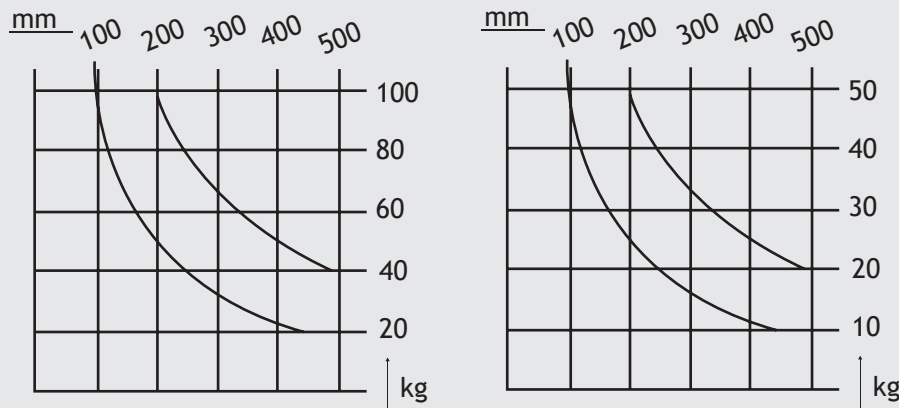


Diagram: ECO S100

When choosing your positioner, please consider:

- the center of gravity of your workpiece
- the weight of your tensioning device(chuck)

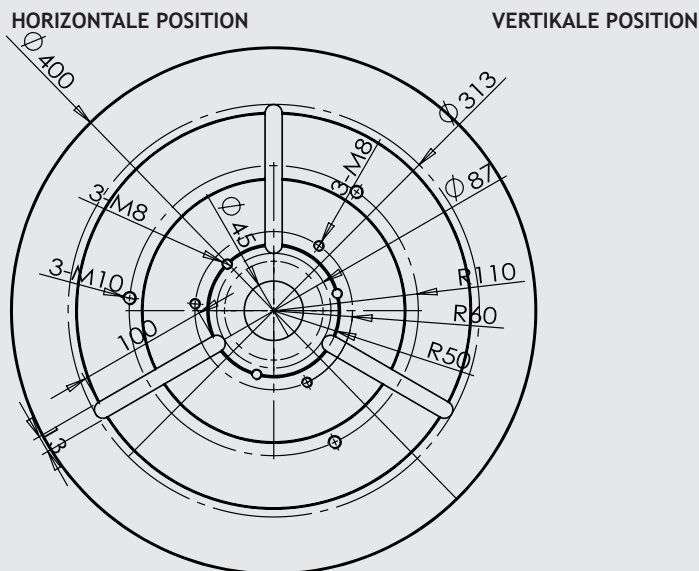

Turntable plate ECO S100 and ECO S200

Note

Suitable quick action chuck for ECO-S100
Chuck 200JW*, Chuck 300JW and Chuck 400 JW

Page: 131

Chuck 200 JW
Item no.: 02.20.10.01020
(old: 91919110)

