


Monteringsledninger, PVC-isolerede

Wires, PVC insulated

Standard: HD 21.3

Standard: HD 21.3

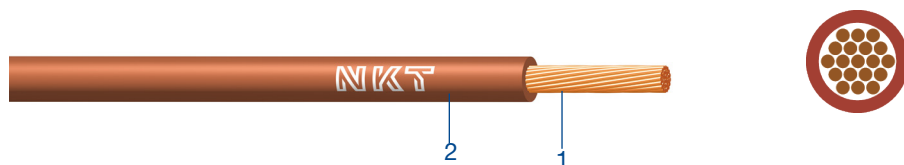

Konstruktion:

Construction:

1 Kobberleder, mangetrådet kl. 5
Copper conductor, stranded, cl. 5

2 Isolation, blyfri PVC
Insulation, lead-free PVC

Anvendelse:

Application:

PVT H07V-K anvendes som monteringsledning i indre ledninger, i brugsgenstande, belysningsgenstande samt indendørs installationer, elektriske anlæg, tavler etc.

PVT H07V-K is used as a mounting cable in internal wiring, in utility items, lighting items and indoor installations, electrical systems, switchboards, etc.

Egenskaber:

Properties:

Mærkespænding AC Rated voltage AC	450/750 V
Prøvespænding DC Test voltage DC	2,5 kV AC
Max. drifttemperatur Max. operating temperature	70 °C
Max. kortslutningstemperatur Max. short-circuit temperature	160 °C
Min. håndteringstemperatur Min. handling temperature	5 °C
Max. lagertemperatur Max. storage temperature	40 °C

Brandprøve Fire test	IEC 60332-1
Min. bøjeradius Min. bending radius	6 x kabeldiameter 6 x cable diameter
CE-overensstemmelse CE-conformity	Lavspændingsdirektivet Low Voltage Directive
Certificering Certificat	HAR HAR
RoHS RoHS	Ja Yes

Tekniske data (G):

Technical data (G):

Dimension No. of cores and cross-section	Farve Color	Levering Delivery	Udvendig dimen- sion, nom. Outer diameter, nom.	Udvendig dimen- sion max. Outer diameter max.	Ca. vægt Cable mass approx.	El-nr. Product number	EAN-nr. EAN-nr.
mm ²		m	mm	mm	kg/km		
1G1,5	Grøn/gul Green/yellow	Rg 100	2,9	3,4	19	30 32 306 533	
1G1,5	Grøn/gul Green/yellow	Tb 1800	2,9	3,4	19	30 32 306 135	
1X1,5	Blå Blue	Rg 100	2,9	3,4	19	30 32 306 559	
1X1,5	Blå Blue	Tb 1800	2,9	3,4	19	30 32 306 342	
1X1,5	Brun Brown	Rg 100	2,9	3,4	19	30 32 302 016	
1X1,5	Brun Brown	Tb 1800	2,9	3,4	19	30 32 306 339	
1X1,5	Orange Orange	Rg 100	2,9	3,4	19	30 32 306 562	
1x1,5	Rød Red	Rg 100	2,9	3,4	19	30 32 306 546	
1X1,5	Sort Black	Rg 100	2,9	3,4	19	30 32 302 003	
1G2,5	Grøn/gul Green/yellow	Rg 100	3,5	4,1	29	30 32 302 045	
1X2,5	Grøn/gul Green/yellow	Tb 1200	3,5	4,1	29	30 32 307 192	
1x2,5	Blå Blue	Rg 100	3,5	4,1	29	30 32 302 032	
1X2,5	Brun Brown	Rg 100	3,5	4,1	30	30 32 306 520	
1X2,5	Orange Orange	Rg 100	3,5	4,1	29	30 32 221 469	
1X2,5	Rød Red	Rg 100	3,5	4,1	29	30 32 306 517	
1X2,5	Sort Black	Rg 100	3,5	4,1	29	30 32 302 029	
1X2,5	Sort Black	Tb 1200	3,5	4,1	44	30 32 306 313	
1X4	Sort Black	Rg 100	4,1	4,8	44	30 32 305 026	
1X4	Sort Black	Tb 1000	4,1	4,8	44	30 32 306 274	

NKT® er et registreret varemærke ejet af NKT. Ophavsretten i dette dokument tilhører NKT på tidspunktet for udgivelse. Informationen i dokumentet er alene informativ og indeholder således ingen bindende forpligtelser eller erklæringer og ingen garantier.

NKT® is a registered trademark of NKT. © The copyright of this document is vested in NKT. All rights reserved at the time of issuance. This data was prepared for informational purposes only and does not contain any representations, legally binding declarations or guarantees.