




## BESKRIVELSE

**750R**

Vinkelløbende regulerbar returkobling  
med O-ring.

Indvendigt gevind. Forniklet.

## DIMENSIONER

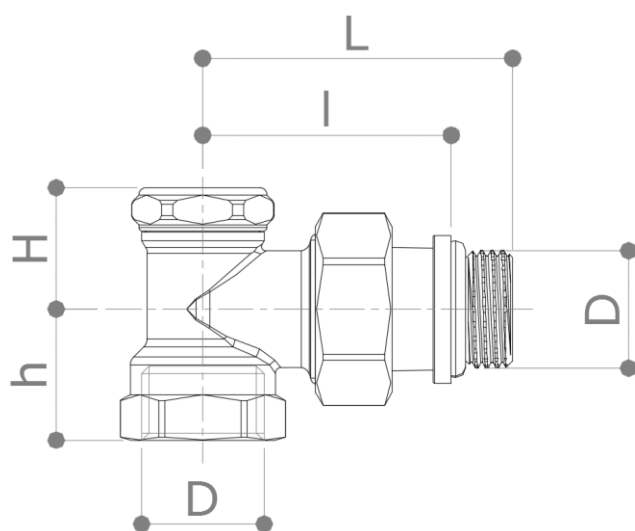

| D   | 3/8" | 1/2" |
|-----|------|------|
| H   | 23   | 21.5 |
| h   | 20   | 23   |
| L   | 51   | 54   |
| I   | 41   | 45   |
| Gr. | 190  | 230  |

Dimensioner i mm. Alle gevind er i overensstemmelse  
med ISO 7 eller ISO 228 standarder.

## MATERIALER


|                  |                             |
|------------------|-----------------------------|
| <b>Ventilhus</b> | CW617N (EN 12165) CuZn40Pb2 |
| <b>Nippel</b>    | CW617N (EN 12165) CuZn40Pb2 |
| <b>Møtrik</b>    | CW617N (EN 12165) CuZn40Pb2 |
| <b>O-ring</b>    | EPDM                        |
| <b>Klap</b>      | CW614N (EN 12164) CuZn39Pb3 |
| <b>Hætte</b>     | CW614N (EN 12164) CuZn39Pb3 |

## ANBEFALET DRIFTSTEMPERATUR / MAKSIMALTRYK

10 bar - 100°C - non shock

Nominal pressure: 10 bar

## TRYKTABSDIAGRAM

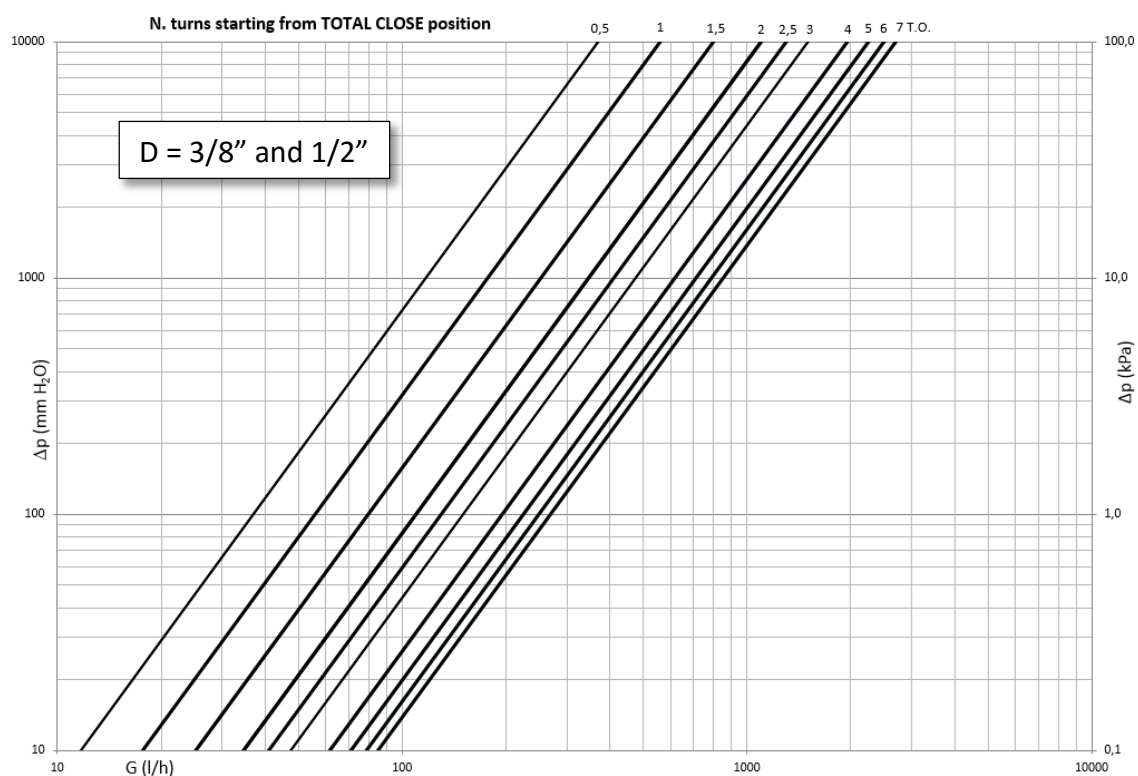

| Turns | 0.5  | 1    | 1.5  | 2   | 2.5 | 3   | 4    | 5    | 6   | 7 T.O. |
|-------|------|------|------|-----|-----|-----|------|------|-----|--------|
| Kv    | 0.37 | 0.56 | 0.80 | 1.1 | 1.3 | 1.5 | 1.95 | 2.25 | 2.5 | 2.7    |

T.O.: Total Open