



HYBRID ADAPTERSTIK TYPE H1

Adaptor fra apparater med dansk jord til stikkontakter med sidejord eller pindjord. Med denne adaptor kan man lave de almindelige danske jord stik, om til et tysk (Schuko/EU) jordstik, eller fransk pindjord, uden at udskifte apparatets stikprop. En sikker og nem løsning til apparater der kræver beskyttelsesjord.

Montering og tilslutning

Sæt stikproppen med dansk jordsystem i hybridadapteren. Sæt derefter

hybrid adapteren i vægstikkontakten med tysk sidejord eller fransk pind-jordssystem. Dit apparat vil nu være forsynes med beskyttelsesjord. Bemærk at adapterstikket skal monteres direkte i stikkontakt. Sæt ikke adapteren ind i en anden adapter!

Garanti

2 års garanti, jævnfør gældende salgs- og leveringsbetingelser. Disse er til enhver tid tilgængelige på Elworks A/S hjemmeside.



PRODUKTINFORMATION:

Varetype:	H1
Beskrivelse:	Hybrid adapterstik dansk til fransk pind jordsystem
Anvendelsesområde:	Indendørs i normal tørre rum
Farve:	Hvid RAL9016. Andre farver på bestilling.
IP klasse:	IP20 (Ingen særlig beskyttelse mod indtrængen af vand)
Beskyttelsesjord:	Ja, dobbelt jord system (2P+E)
Børnesikret:	Ja, forsynet med pillesikring
Max. belastning:	16 Ampere
Max. spænding:	250 V AC ~
Max. forbrug:	3600 Watt
Frekvens:	50 Hz
Materiale primær:	Polyamid 6 PA6 FR 
Brandhæmmende UL94:	Ja, V-0
Materiale jordklemme:	Messing
Materiale L+N klemme:	Fosfor Bronze
Materiale stikben:	Messing
Vægt produkt:	0,043 kg.
Dimension (diameter x D):	Ø44 x 63 mm

MILJØ OG BÆREDYGTIGHED:

Varetype:	H1
Omgivelsestemperatur:	+30° til +55° C.
Halogenfri:	Ja
UV resistent:	Ja
EU RoHS direktiv:	Ja
Kinesisk RoHS regulativ	Ja
REACH direktiv:	Ja
Dokumenteret kvalitetsstyring:	Bureau Veritas ISO 9001
Dokumenteret social ansvarlighed:	Bureau Veritas SA 8000:2014



Teknisk dokumentation:

Designet i Danmark. OEM fremstillet i Kina af Holst Andersen Manufacturing Zhuhai Limited.


Sikkerhedskontrolleret af tredjepart efter nedenstående europæiske standarder:

Lavspændingsdirektivet (LVD): IEC 60884-1:2002+A1:2006+A2:2013, DS/IEC 60884-2-5:2017 og DS 60884-2-D1:2017.

Begrænsning af anvendelsen af visse farlige stoffer (RoHS): IEC 62321-8:2017



TEKNISKE TEGNINGER

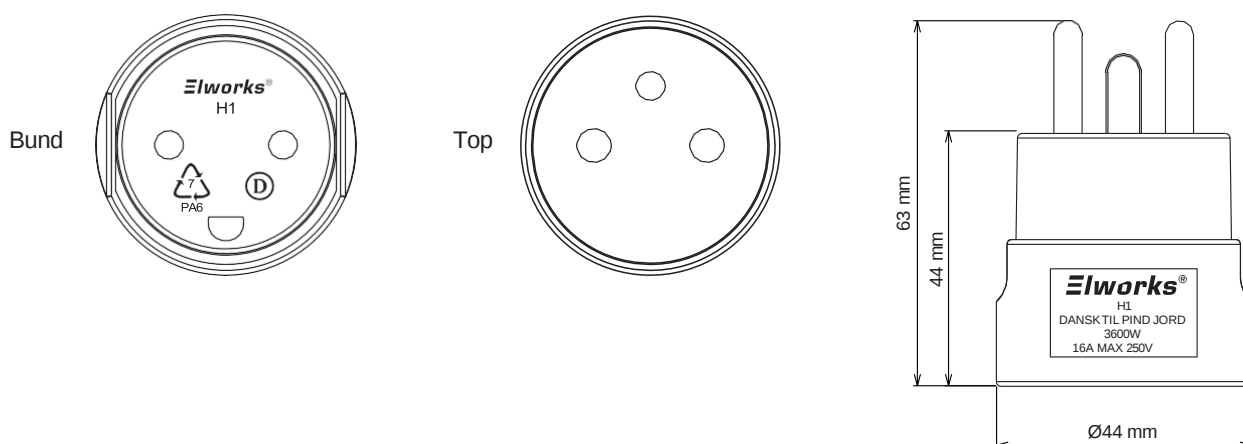

PAKKE INFORMATION:

Blisterpakning B0 med papirindlæg				
H1WH	Størrelse (BxHxD)	Vægt	EAN13 stregkode	Miljøsortering
Blisterpak PET (1 stk.)	8,0 x 10,4 x 4,8 cm	0,054 kg.	571947006913	22+01
Kollipose PE-LD (6 stk.)	25,5 x 13,5 x 5,5 cm	0,330 kg.	N/A	04
Kasse (120 stk.)	40 x 33 x 34 cm	7,500 kg.	N/A	20

Blisterpakning B1-E genluk med papirindlæg og vejledning				
H1WH	Størrelse (BxHxD)	Vægt	EAN13 stregkode	Miljøsortering
Blisterpak PET (1 stk.)	8,0 x 15,6 x 5,2 cm	0,063 kg.	5708481006911	22+01
Kollipose PE-LD (6 stk.)	29 x 16 x 8 cm	0,400 kg.	N/A	04
Kasse (84 stk.)	39 x 39 x 37 cm	6,000 kg.	N/A	20

Krympeplastpose med label				
H1WH	Størrelse (BxHxD)	Vægt	EAN13 stregkode	Miljøsortering
Posepak POF (1 stk.)	6,4 x 4,5 x 4,5 cm	0,045 kg.	57091747906916	07
Kollipose PE-LD (10 stk.)	25 x 12,5 x 4,5 cm	0,460 kg.	N/A	04
Kasse (250 stk.)	39 x 29 x 30 cm	11,500 kg.	N/A	20



HYBRID ADAPTOR TYPE H1

Hybrid Adapter for appliances with Pin Earth (French) earth to socket outlets with Danish earth. With this adapter you can adapt Pin earth plugs, into Danish earth plug, without replacing the appliance's plug. A safe solution for appliances that require protective earth.

Installation

Insert the plug with the Pin earth system into the hybrid adapter. Then plug

the hybrid adapter into the wall outlet with Danish ground. Your appliance will now be provided with protective earth. Note that the hybrid adapter must mounted directly in the socket. Do not insert the adapter into another adapter!

Guarantee

2 year limited warranty according to sales and delivery conditions. These are available at Elworks A/S's website.



PRODUCT INFORMATION:

Model type:	H1
Description:	Hybrid Adaptor Danish to French pin earth system
Work environment:	Indoor use (applicable for dry environment)
Colour:	White RAL9016. Others colours available upon order.
IP rating:	IP20 (Not protected against ingress of water)
Protective earth:	Yes, double earthing system (2P+E)
Child safety:	Yes, socket-outlet with shutters
Maximum current:	16 Ampere
Maximum voltage:	250 V AC ~
Maximum power:	3600 watts
Frequency:	50 Hz
Primary material:	Polyamide 6 PA6 FR 
Flame retardant UL94:	Yes, V-0
Material earth receptacle:	Brass
Material L+N receptacle:	Phosphor Bronze
Material pins:	Brass
Product weight:	0.043 kg.
Dimension (diameter x D):	Ø44 x 63 mm

ENVIRONMENTAL AND SOCIAL ACCOUNTABILITY:

Model type:	H1
Surrounding temperature:	+30° to +55° C.
Halogen free:	Yes
UV resistant:	Yes
EU RoHS directive:	Yes
China RoHS regulation	Yes
REACH directive:	Yes
Documented quality control:	Bureau Veritas ISO 9001
Documented social responsibility:	Bureau Veritas SA 8000:2014



Bibliography:

Danish design. OEM production in the P.R.C. by Holst Andersen Manufacturing Zhuhai Limited.


Safety controlled by third parties according to the following European standards:

Low Voltage Directive (LVD): IEC 60884-1:2002+A1:2006+A2:2013, DS/IEC 60884-2-5:2017 and DS 60884-2-D1:2017.

Restriction of the use of certain Hazardous Substances (RoHS): IEC 62321-8:2017.



TECHNICAL DRAWINGS

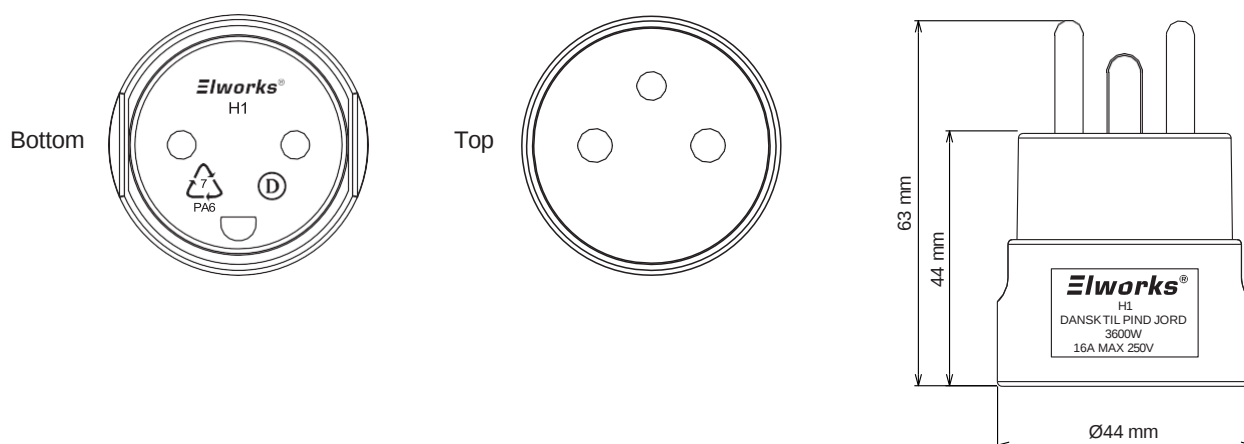

PACKING INFORMATION:

Welded blister pack B0 with paper insert

H1WH	Size (WxHxD)	Weight	EAN13 barcode	Recycling
Blister PET (1 pc.)	8.0 x 10.4 x 4.8 cm	0.054 kg.	571947006913	22+01
Colli bag PE-LD (6 pcs.)	25.5 x 13.5 x 5.5 cm	0.330 kg.	N/A	04
Carton (120 pcs.)	40 x 33 x 34 cm	7.500 kg.	N/A	20

Clamshell blister pack B1-E re-open/close with paper insert and instruction

H1WH	Size (WxHxD)	Weight	EAN13 barcode	Recycling
Blister PET (1 pc.)	8.0 x 15.6 x 5.2 cm	0.063 kg.	5708481006911	22+01
Colli Bag PE-LD (6 pcs.)	29 x 16 x 8 cm	0.400 kg.	N/A	04
Carton (84 pcs.)	39 x 39 x 37 cm	6.000 kg.	N/A	20

Heatshrink bag with label

H1WH	Size (WxHxD)	Weight	EAN13 barcode	Recycling
Bag POF (1 pc.)	6.4 x 4.5 x 4.5 cm	0.045 kg.	57091747906916	07
Colli Bag PE-LD (10 pcs.)	25 x 12.5 x 4.5 cm	0.460 kg.	N/A	04
Carton (250 pcs.)	39 x 29 x 30 cm	11.500 kg.	N/A	20