




92623

EAN: 4007529926237

Indoor 180-R covering included

- ✓ Voltage: 110 – 240 V AC 50 / 60 Hz
- ✓ Dimensions: 92623= covering included 87 x 87 x 61 mm
- ✓ Power consumption: approx. 0.5 W

10 m

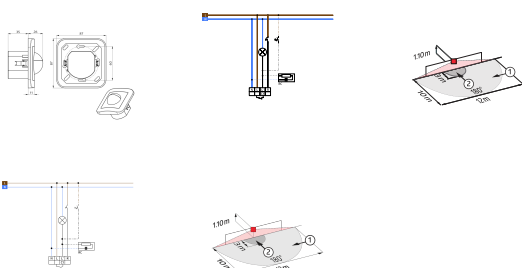

Features

Voltage	110 – 240 V AC 50 / 60 Hz
Dimensions	92623= covering included 87 x 87 x 61 mm
Power consumption	approx. 0.5 W
Detection area	horizontal 180° (Wall mounting)
Range	max. 10 m across max. 3 m towards
Monitored area (tangential movement)	150 m² / 1.1 m mounting height
Mounting height min./max./recommended	1 m / 2.2 m / 1.1 m
Degree / class of protection	92623= IP20 / Class II
Impact strength	IK05
Ambient temperature	-25 °C to +50 °C
Housing	polycarbonate, UV-resistant
Material color	pure white mat, similar to RAL9010
Channel 1 (lighting control)	
Switching power	2300 W, cos φ = 1 1150 VA, cos φ = 0.5 300 W LED max. inrush current I _p (20 ms) = 165 A max. inrush current I _p (200 μ s) = 800 A
Type of contact (k)	1x μ -contact, NO contact with tungsten pre-make contact
Follow-up time	15 sec – 16 min, Pulse
Switch-on threshold	10 – 2000 Lux

Description

Wall motion detector with acoustic sensor

Relay version with three-wire technology

Acoustic sensor independently adjustable

Noise automatically extends follow-up time

Manual switching via push-button possible

Available with covering (centre plate dimensions 60 x 60 mm) or without covering for use with covering (centre plate dimensions 50 x 50 mm) in 5 different colours

In combination with centre plates usable with current frame systems of various manufacturers

B.E.G. frames and centre plates for combination with other frame systems available

Application examples:

entrance halls, corridors/hallways, staircases, toilets, equipment rooms