

BD2A-400-ZL-X*/Y*/Z* Z UNIT LEFT X/Y 0,36M-0,60M, Z 0,14M-1,25M 160-400A

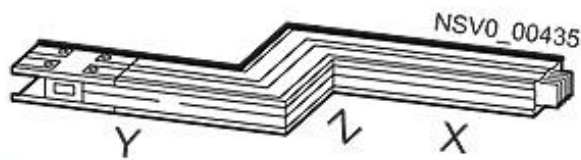


Figure similar

Model	
Product designation	L unit (junction unit) for BD2 busbar trunking system
Protection class	
Protection class IP	IP52
Main circuit	
Operating frequency / rated value	
• minimum	50 Hz
• maximum	60 Hz
Operating voltage / at AC	
• at 50 Hz / rated value / maximum	690 V
• at 60 Hz / rated value / maximum	690 V
Operating current	
• for circuit 1 / at AC / at 50 Hz / rated value / maximum	400 A
• for circuit 1 / at AC / at 60 Hz / rated value / maximum	400 A

Connections

Conductor cross section / of the (PE)N	205 mm ²
--	---------------------

Mechanical Design

Height	68 mm
Width	1 250 mm
Mounting type	ceiling / wall
Material / of the busbar	aluminium

Declaration of Conformity



EG-Konf.

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=BVP:261820>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/BVP:261820>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=BVP:261820

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>