

Figure similar

MLFB-Ordering data 1FK2210-4AC10-1SA0

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Basic motor data		Mechanical data	
Motor type	Permanent-magnet synchronous motor, Natural cooling, IP64	Design acc. to Code I	IM B5 (IM V1, IM V3)
Motor type	Compact	Vibration severity grade	Grade A
Static torque	40.00 Nm	Shaft height	100
Static current	15.0 A	Flange size (AB)	192 mm
Maximum torque	120.00 Nm	Centering ring (N)	180 mm
Maximum current	55.0 A	Hole circle (M)	215 mm
Maximum speed	3300 rpm	Screw-on hole (S)	14.0 mm
Rotor moment of inertia	133.000 kgcm²	Overall length (LB)	282 mm
Weight	31.0 kg	Diameter of shaft (D)	38 mm
Rated data		Length of shaft (E)	80 mm
		Length of flange diagonal (P)	244 mm
		Shaft extension	Fitted key

SINAMICS S210, 3AC 400V

Rated speed	2000 rpm
Rated torque	30.50 Nm
Rated current	11.8 A
Rated power	6.40 kW

Encoder system	
Encoder system	Encoder AS22DQC: Absolute encoder single turn 22 bit

Motor connection	
Connection type	OCC for S210
Connector size	M23

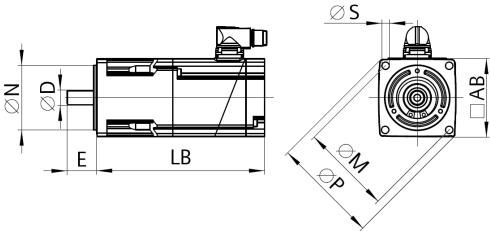


Figure similar

1FK2210-4AC10-1SA0

Figure similar

¹⁾ Up to three consecutive emergency stops and up to 25% of all emergency stops as a Wmax high energy stop possible.

²⁾ Typical value for 20°C ambient temperature. At -15°C the break-induced currents can be increased by up to 30%.