



BIS RapidStrut® Fixing Rail (BUP1000)

suspension and support




Features and benefits

- universal rail system
- with continuous perforation (on request without perforation)
- distance between rail end and first hole is always equal
- a continuous graduated centimetre scale on one side
- with inward formed flanges with serrated profile for extra grip
- material: steel 1.0242
- surface protection:
 - product is part of the BIS UltraProtect® 1000 system
 - suitable for in- and outdoor applications
 - stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- for more information about the max. allowed load (Fa,z) please refer to the loading tables or our online datasheet 'Technical Details BIS RapidStrut®'



Part No.	Model	L	B (mm)	H (mm)	s (mm)	S (mm)	RAL	BndS	BndL	App.
6501 8 227	Perforated	2 m	41	21	2,50	22	RAL ¹	20	200	m.
6501 8 327	Perforated	3 m	41	21	2,50	22	RAL ¹	30	150	m.
6501 8 627	Perforated	6 m	41	21	2,50	22	RAL ¹	60	600	m.
6501 8 242	Perforated	2 m	41	41	2,00	22	RAL ¹	20	100	m.
6501 8 342	Perforated	3 m	41	41	2,00	22	RAL ¹	30	150	m.
6501 8 642	Perforated	6 m	41	41	2,00	22	RAL ¹	60	300	m.
6501 8 247	Perforated	2 m	41	41	2,50	22	RAL ¹	20	200	m.
6501 8 347	Perforated	3 m	41	41	2,50	22	RAL ¹	30	150	m.
6501 8 647	Perforated	6 m	41	41	2,50	22	RAL ¹	60	300	m.
6501 8 667	Perforated	6 m	41	62	2,50	22	-	6	180	m.
6501 8 687	Perforated	6 m	41	82	2,50	22	-	6	180	m.

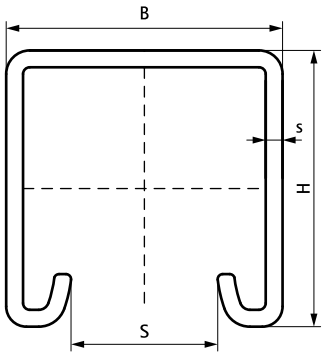

For detailed technical information about our RAL marked products, please see the RAL datasheet in our web catalogue: www.walraven.com/library/repository/rnd/documents/RAL-Certified-Products-data-sheet-EN.pdf.
For more information about the max. allowed load (Fa,z) please refer to the loading tables or our online datasheet 'Technical Details BIS RapidStrut®'.

Subject to modifications