



10-meter HCI/LTE-Kabel

TNC han og N han connector
(7460LMR) + 7335LMR)

Kabel: FF200 Feedflex, Low Loss,
50ohm, sort kabel



EAN: 5704717011247




FF 200 PE LOW LOSS 50 OHM COAXIAL CABLE

Technical Data


Product Number	6068	
CONDUCTOR	CONSTITUTION	18 AWG (1 / 1,12 mm)
	MATERIAL	BARE COPPER WIRE
	MATERIAL	GAS INJECTED FOAMED POLYETHYLENE
INSULATION	THICKNESS	0.91 mm Nom.
	O.D.	2.95 ± 0.10 mm
	COLOR	NATURAL
SHIELD	FOIL	AL-MYLAR TAPE IS LONGITUDINALLY WRAPPED OVERALL THE CABLE
	BRAID	96 / 0.12 mm TINNED COPPER WIRES. WITH 85% COVERAGE Min.
	MATERIAL	PE (80°C RoHS)/UV-Resistent
JACKET	THICKNESS	0.64 mm Nom.
	O.D.	4.95 ± 0.20 mm
	COLOR	BLACK
WEIGHT		36.2 Kg / 1Km
MARDING		... M ... FEEDFLEX® FF 200 PE LOW LOSS 50 OHM COAXIAL CABLE ... M ...

PERFORMANCE PROPERTIES

IMPEDANCE		50 ± 2 Ω											
CAPACITANCE		80.4 p F/M Nom.											
VELOCITY OF PROPAGATION		83 % Nom.											
MAX. OPERATING TEMPERATURE. (°C)		-40 / 60°C											
MIN. BEND RADIUS		12.7 mm											
ATTENUATION	MHz	30	50	150	220	450	900	1500	1800	2000	2500	5800	
(dB/100m)	dB	5.8	7.5	13.1	15.9	22.8	32.6	42.4	46.6	49.3	55.4	86.5	
AVERAGE POWER	kW (at 20°C)	1.02	0.79	0.45	0.37	0.26	0.18	0.14	0.13	0.12	0.10	0.05	
INNER CONDUCTOR RESISTANCE		17.6 Ω / Km Nom											
INSULATION RESISTANCE		100 M Ω-Km Min											
DIELECTRIC STRENGTH		1.0 KV / 1 min. Min.											

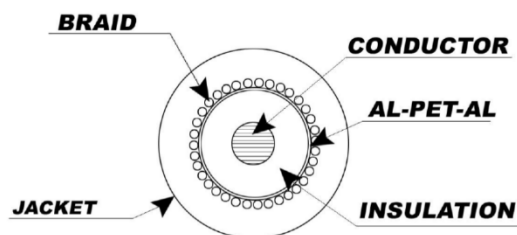

7460LMR - TNC male crimp for LMR200

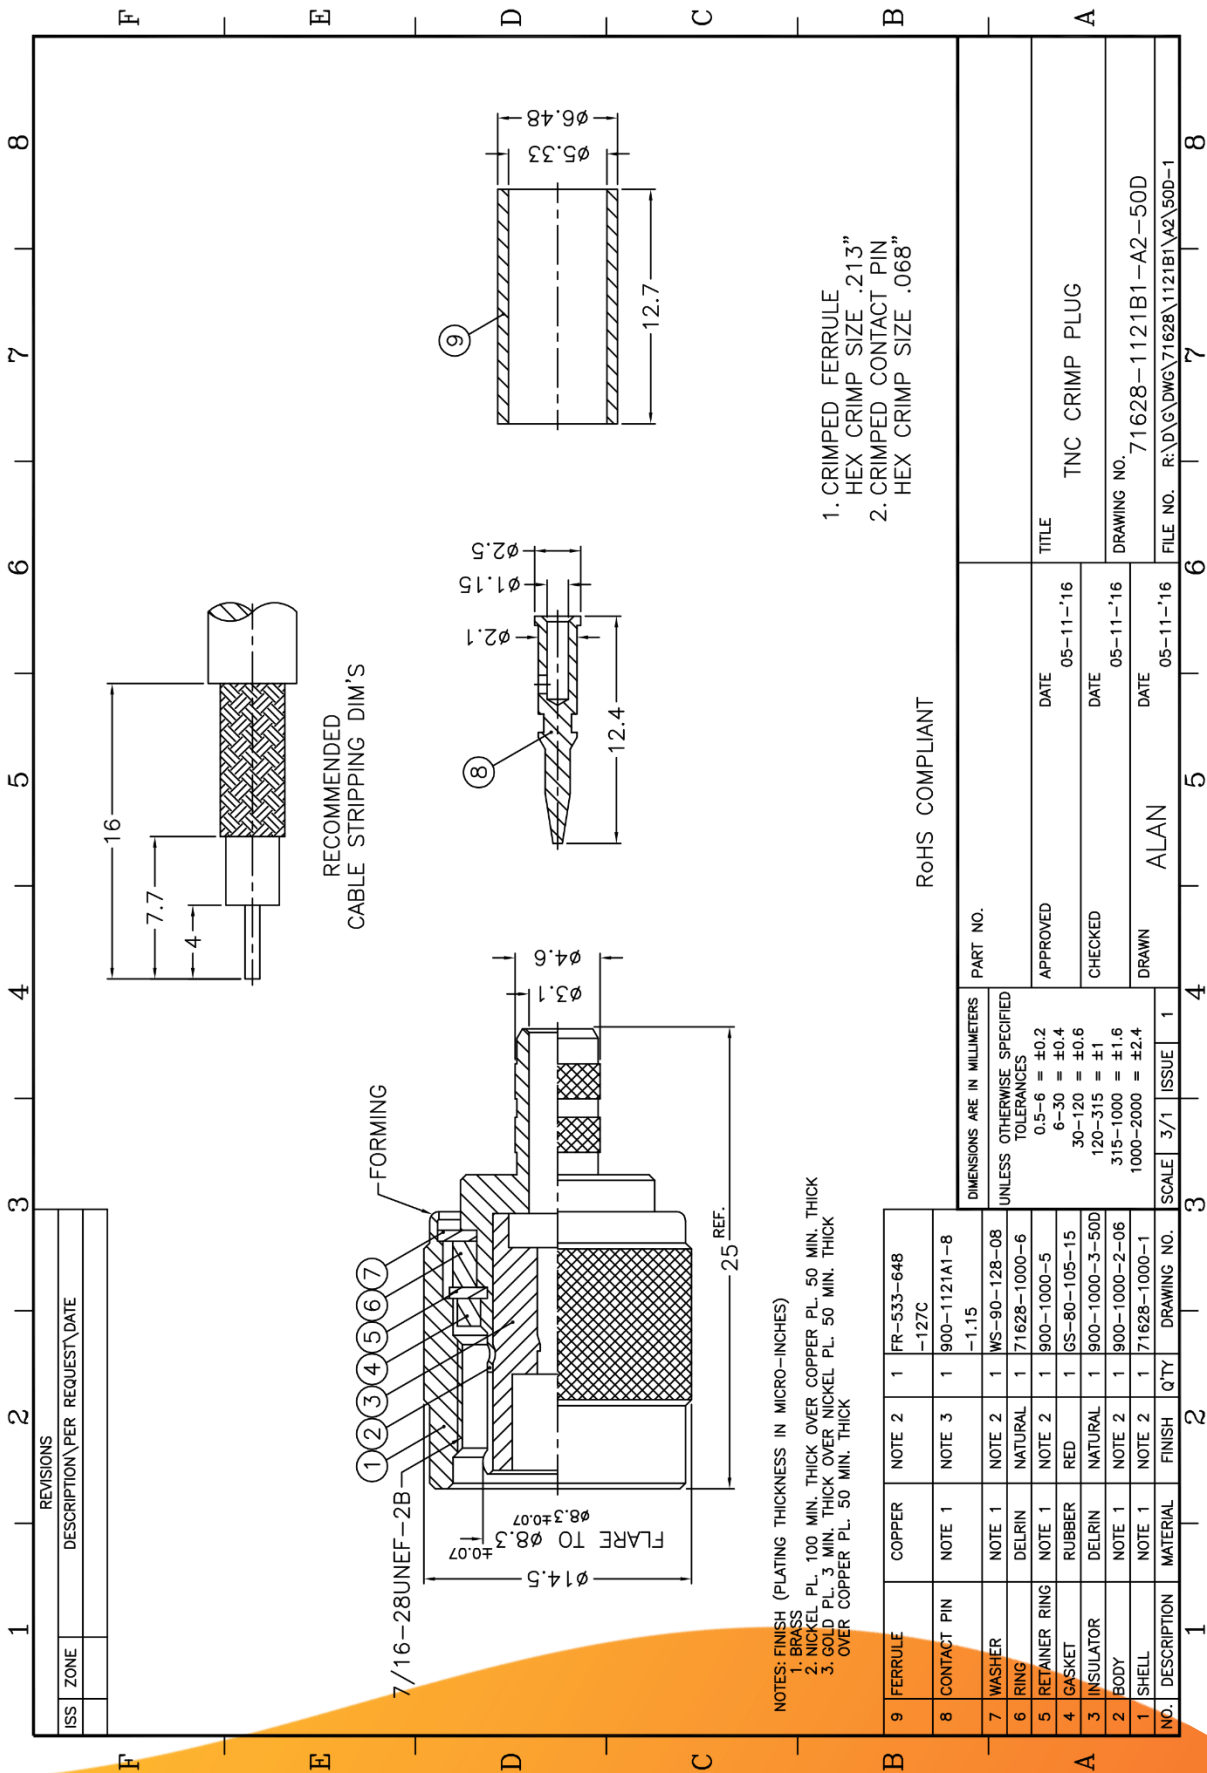

7335LMR - N male crimp for LMR200

[illegible]