


Product data						
Product code	VC01-0011		STK-code	1912019	EAN-code	641001912019
Product name	OL2x50-150					
Wires	2xAl/Cu 50-150	mm²				
Technical data						
Nominal current	Cu	-	A			
	Al	-	A			
Nominal voltage		-	V			
Man Commant (116)	Cu	-	A			
Max. Current (US)	Al	-	A			
Max. Voltage (US)		-	V			
Number of pole		1				
Max. Cross section		150	mm²		2 300	
Tightening torque	50-150 mm²	40	Nm			
Max. Operating temp	erature	80	°C			
Weight 240		g		1	( C V	
IP-protection		-				(E <sub>RoHS</sub>
Standards UL 486E		UL 486E				
Color/ Material StainI		Stainless st	eel/ Tin plated copper			
Mounting/ Connection Screw M:		Screw M10				

OL-connectors are designed to be used connecting aluminium and cobber conductors. Frames are made of stainless steel and busbars are tin-plated copper.

## Drawing

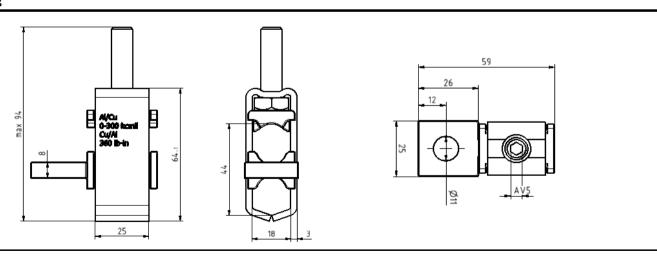

Package										
Package	Вох	pcs/ package	3	Weight [Kg]	0,74					
Length (mn	nl <b>86</b>	Width [mm]	68	Height [mm]	82					