



RAM-TR



RAM-TW

## Strap-on Thermostats

Electromechanical TR and TW

**RAM-TR...**  
**RAM-TW...**

- Temperature control or limitation with single-pole changeover microswitch
- Switching capacity contact connection C-1: 0.2...16 A, AC 250 V  
contact connection C-2: 0.2...16 A, AC 250 V
- Mounting choices: surface-mounted on pipes or storage tanks

### Use

Typical applications:

- In heat generation plant (control or supervision of the water temperature, control of pumps, valves, etc.)
- For general use in heating, ventilation and air conditioning plant

### Function


Changeover switch  
(S.P.D.T)

When the externally adjustable setpoint of the control thermostat (TR) is reached on rising medium temperature, contact connection C-1 changes over to C-2.

When the internally adjustable switch-off temperature of the thermal reset limit thermostat (TW) is reached on rising medium temperature, contact connection C-1 changes over to C-2.

When the temperature of the medium falls by the value of the switching differential, the contact connection reverts (C-1 closes, C-2 opens).

## Changeover contact

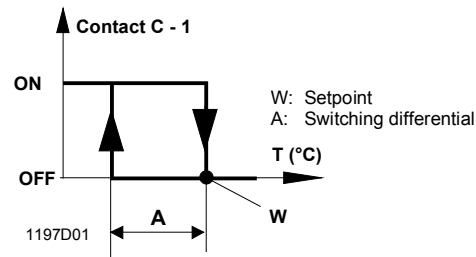

## Type summary

Standard set	Setpoint or switch-off temperature range	Scope of delivery
RAM-TR.2000M	0...90 $^{\circ}\text{C}$ , externally adjustable	Fixing spring, Mounting Instructions
RAM-TW.2000M	0...90 $^{\circ}\text{C}$ , internally adjustable	Fixing spring, Mounting Instructions

## Ordering

When ordering, please give type reference according to <<Type summary>>.

## Mechanical design

The housing of the thermostat is made of PA6 (reinforced) and is designed for surface mounting. The bimetal sensing element is mounted on a steel plate.

## Notes

Mounting aid

Installation Instructions are enclosed in the package.

Mounting location

Ensure that there is sufficient clearance above the thermostat for adjusting the setpoint resp. the switch-off temperature and for removing and replacing the device, if required.

Pipe mounting

Attach the fixing spring to the mounting plate. It must be properly tightened to ensure that the entire length of the sensing element is in close contact with the pipe's surface. With the delivered spring clip the thermostat can be mounted on pipes with diameters between 16 mm and 115 mm.

⚠ Temperature adjustment

With the TW, the switch-off temperature may only be adjusted by qualified staff.

⚠ Wiring

The thermostat must be wired by qualified staff. The cables used must meet the insulation requirements for mains voltage.

Stripping





Max. 9 mm

⚠ Max. AC 250 V


Wiring must be made in accordance with the connection diagram and in compliance with local regulations.

Caution: Before opening the housing, disconnect the thermostat from the mains supply.

## Technical data

Switching mechanism	Switching capacity	
	Nominal voltage range	AC 24...250 V
	Nominal current range I (I <sub>M</sub> )	
	Terminals C-1	0.2...16 A
	Terminals C-2	0.2...16 A
	External fuse	16 A
	Life expectancy at nominal rating	min. 200,000 switching cycles
	Safety class	I to EN 60 730
	Degree of protection	IP 40 to EN 60 529
	Adjustable temperature range	
Norms and standards	RAM-TR and RAM-TW	0...90 °C
	Thermal switching differential	approx. 8 °C ± 2 °C
	 conformity	
	Electromagnetic compatibility	2004/108/EC
	Low-voltage directive	2006/95/EC
Product standards	C-tick	 N474
	Automatic electrical controls for household and similar use	EN 60 730-11
	Special requirements for temperature-dependent controls	EN 60 730-2-11
Environmental conditions	Type 2 action	BL
	Radio interference protection	click rate N ≤5 to EN 55 014
	Operation	class 3K5 to IEC 60 721-3-3
	Max. temperature at the sensing element	110 K
	Ambient temperature	max. 85 °C (T85)
	Humidity	< 95 % r.h.
	Mechanism	class 3M2 to IEC 60 721-3-3
	Storage and transport	class 2K3 to IEC 60 721-3-2
	Ambient temperature	-25...+70 °C
	Humidity	< 95 % r.h.
Accuracy	Max. temperature at the base	110 °C
	Degree of pollution	2 normal to EN 60 730
	Controlled medium:	water, oil
	Calibration deviation	±2 °C
	Manufacturing deviation temperature range	T.Min. ± 4 °C / T.Max. ± 6 °C
Connection	Influence of the ambient temperature	-0.2 °C / °C
	Electrical connection	screw terminals for wires 0,75 to 1,5 mm <sup>2</sup>
	Cable entry	cable 7.5 mm dia.
General data	Housing color	RAL 7035 (light-grey)
	Sensing element	bimetal
	Weight of standard set RAM-TR	0.13 kg
	RAM-TW	0.13 kg

## Connection diagram



## Dimensions

