


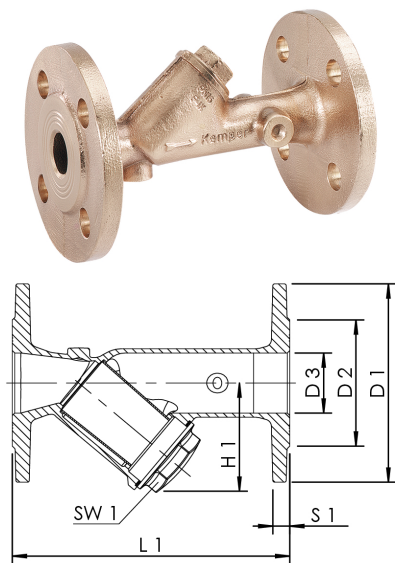

Product Features

- wetted metal parts made from dezincification-free and corrosion-resistant gunmetal, resistant against aggressive water
- easily replaceable double mesh made of stainless steel
- flange connection
- for any installation position

Standards and Approvals

- DIN EN 558-1

Technical Data

- pressure rating PN 16
- max. operating temperature 200 °C
- mesh width outer supporting sieve 0.6 mm
- mesh width inner screen 0.3 mm

Part No.	DN	number of boreholes	D1 (mm)	D2 (mm)	D3 (mm)	H1 (mm)	L1 (mm)	S1 (mm)	SW1 (mm)	kvs (m³/h)	Zeta
6050005000	50	4	165	102	50	91	230	14	50	47.1	4.4
6050006500	65	4	185	122	65	101	290	15	60	81.6	4.2
6050008000	80	8	200	138	80	112	310	16	60	128	3.9
6050010000	100	8	220	158	100	151	350	18	70		

Accessories

- backing ring for stub flange, figure 410 00
- stub flange, figure 425 00
- threaded flange, figure 426 00
- gasket, figure 428 00