

## CASA RELAIS

The relay has 2 potential-free contacts. Depending on the contact, the max. Power to be switched. Furthermore, both contacts are independently controllable.




## TECHNICAL DATA

ART.-NO. **CO-CASARELAIS**

Electrical data	
Input Voltage	230 V AC
max. switching Voltage	250 V AC / 28 V DC
Powerfactor	0,4
maximum switching power	1500 VA (AC) / 165 W(DC)
Standby	0,15 W
Terminal cross-section	max. 1,5 mm <sup>2</sup>
Cycles of operation	50.000
Appliance	ohm resistive load
Temperature range in use	-20 C° - +50 C°
Certifications	
Certificates	CE, RoHS
Protection class	IP20
Dimensions / Material	
Size	143 x 38 x 27 mm
Material	Plastic
Max. body temperature	60 C°
Storage temperature	-25 C° - +75 C°

## CONNECTION PLAN

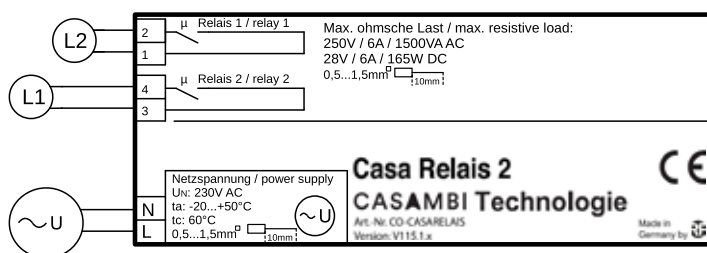

### NOTE

Subject to technical changes and printing errors.  
Installation only by an experienced technician.