

C315S

Internal Door Phone Monitor



Overview:

The Akuvox C315S Premium touch screen provides Audio and Video communication with all Akuvox IP Door Phones via SIP 2.0 protocol.

Delivering the ultimate touch screen experience in an unobtrusive, space saving design featuring a 7" capacitive touch screen display.

The C315S has an ultra-clear and stylish appearance incorporating a thin profile and small footprint. Perfect for installation in office spaces or in private residential building spaces.

The Ability to have 2-Way communication with other intrernal monitors in a network is seamless based on the SIP v2.0 protocol. the C315S is powered by PoE(Power over Ethernet) allowing for simple installation.



VANDERBILT

C315S

Internal Door Phone Monitor

C315S Internal Door Phone Monitor:

✓ IP AUDIO & VIDEO

The C315S provides audio and visual communication with all of Akuvox's IP door phones.

✓ 7" TOUCHSCREEN

The C315S is an elegant 7" touch screen. The 7" display can present information and user navigation option customizable for you business or residential building.

✓ POE IEEE802.3AF, POWER-OVER-ETHERNET

The Akuvox Range of products are all POE (Power over Ethernet) devices or 12 Volt power supply. POE Switches Sold Separately**

✓ HD Quality Video

The C315S Receives HD Quality video when receiving IP calls from the Akuvox door phones.

POE Switches are not provided with any Akuvox device



Additional Features:

Video:

- Streaming Formats: H.264
- Resolution: up to 1080p

Interface:


- Ethernet: 2 x 10/100 Mbps ports, auto-switching, auto-discovery, auto-negotiating, full/half duplex, DHCP, IEEE802.3af compliant
- Relay Out: 1 x relay out (NO/COM/NC)
- Bell in: 1 x Bell input terminal
- RS485: 1 x RS485 Communication port



Internal Door Phone Monitor

Technical Data

Vanderbilt Material Number	N54524-Z100-A100
Power	IEEE 802.3af Power-over-Ethernet
Input Voltage	12V DC (when not using POE)
Operating Environment	Internal wall mounting
Humidity	10% to 90% (Non Condensing)
Nett Weight	0.443 inclusive of mounting bracket
Dimensions (H x W x D mm)	200x132x17.5mm
Material: Body	ABS Plastic
Display	Active Matrix TFT
Display Size	7"(176mm)
Aspect Ratio:	16:9
Resolution	1024 x 600
Illumination	Edge Lit LED
Colour Depth	24-Bit, 16M Colours
Viewing angle	+/-70° Horizontal, +/-70° Vertical
Interface	RS485 x 1 Communication port
Memory Ram	1GB
Memory Flash	8GB

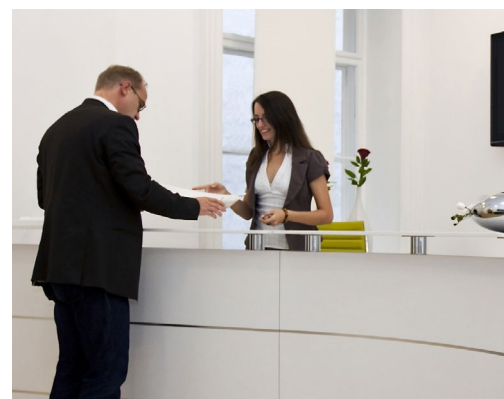



Internal Door Phone Monitor

Ordering Information:

Type	Art. No.	Description	Weight*
C315S	N54524-Z100-A100	C315S Internal Door Phone Monitor	0.550kg

Other Available Products

Type	Art. No.	Description	Weight*
R20A	N54524-Z101-A100	R20A Intercom with Video & Card Reader	0.503kg
R27A	N54524-Z102-A100	R27A Intercom w.Video,Card Reader&Keypad	1.030kg
R27A MOUNTING KIT	N54524-Z105-A100	R27A Mounting Kit- Surface Mount	0.650KG

* Gross weight of the product inclusive of the weight of its accessories and packaging.

an **ACRE**
company

vanderbiltindustries.com


 @VanderbiltInd

 Vanderbilt Industries

Vanderbilt International Ltd.

Clonshaugh Business and Technology Park

Clonshaugh, Dublin D17 KV 84, Ireland

 +353 1 437 2560