


Product data							
Product code	VC01-0002		STK-code	1914191	EAN-code	6410019141917	
Product name	OL 6-70 D=7 M8	3x25					
Wires	1xAl/Cu 6-70 m	m²					
Technical data							
Nominal current	Cu	270	A				
	Al	270	A				
Nominal voltage		-	V				
Max. Current (US)	Cu	-	A				
	Al	-	A				
Max. Voltage (US)		-	V		3		
Number of pole		1				,	
Max. Cross section		70	mm²				
Tightening torque	6-70 mm²	5,6	Nm		THE P	l .	
Max. Operating temperature		80	°C				
Weight		44	g				
IP-protection		-				(EROHS	
Standards SFS2		SFS2663:19	975/ UL 486E				
Color/ Material Stair		Stainless st	tainless steel/ Tin plated copper				
Mounting/ Connection Sc		Screw M8					
Description							

OL-connectors are designed to be used connecting aluminium and cobber conductors. Frames are made of stainless steel and busbars are tin-plated copper.

## Drawing

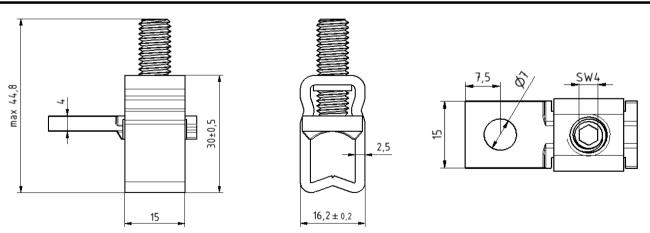

Package									
Package	Вох	pcs/ package	30	Weight [Kg]	1,35				
Length [mm	] 85	Width [mm]	144	Height [mm]	85				