




# Laserliner®

## AutoCross-Laser 3C



Crossline laser with 3 super-bright laser lines and additional plumb laser.

Rev.0412

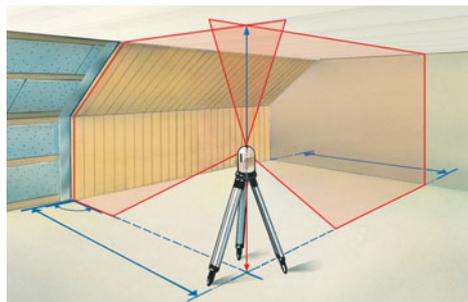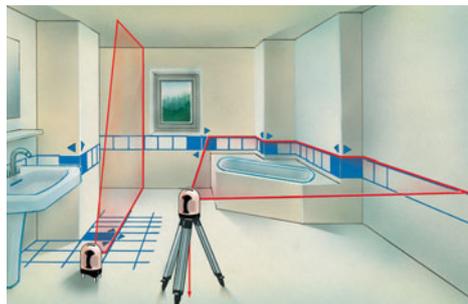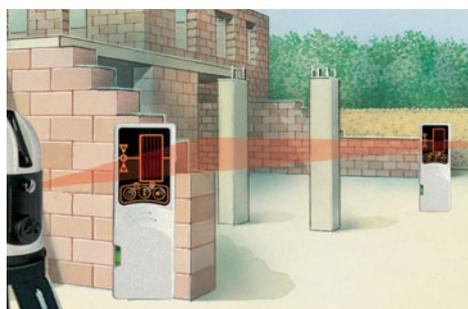


- **PowerBright-Laser:** Special high-performance laser diodes project extremely visible laser lines.
- This unit produces **3 very visible laser lines** which make it outstanding for the alignment of tiles, wall studding, windows, doors, etc.
- **Automatic Level:** automatic alignment by virtue of a magnetic pendulum system.
- The **2 vertical lines** are aligned at right angles to one another.
- A simple, precise plumb function is afforded by the **additional plumb laser** at the bottom and the laser cross at the top.
- **Individually switchable** laser lines.
- **Out-Of-Level:** is indicated by optical signals when the unit is outside its self-levelling range.
- **RX-Ready:** The integrated hand receiver mode detects the laser lines with the optional laser receiver RX up to a max. of 50 m radius – ideal for all interior and exterior applications.
- The pivoted housing can be turned with a **vernier adjustment mechanism** to permit exact positioning of laser lines.
- **Illuminated vial** and **height-adjustable feet** for preliminary adjustment of the unit.
- **Removable rubber caps.**
- **Transport lock:** A pendulum lock protects unit during transport.
- **Simple, uniform operating techniques.**

### TECHNICAL DATA

<b>ACCURACY</b> 2 mm per 10 m
<b>SELF-LEVELLING RANGE</b> ± 2,5°
<b>LEVELLING</b> automatic
<b>LASER RECEPTION RANGE (optional)</b> max. 50 m radius
<b>LASER WAVELENGTH</b> 635 nm
<b>LASER</b> line lasers, class 2M, < 5 mW plumb laser, class 2, < 1 mW
<b>POWER SUPPLY</b> batteries, approx. 16 hrs operating time
<b>WEIGHT</b> 1.4 kg
<b>DIMENSIONS</b> 120 x 190 x 120 mm (W x H x D)

### 1H 2V 1D

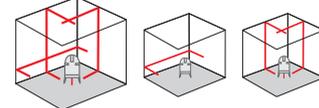

### AutoCross-Laser 3C

- including carrying case
- + tripod adapter
- + laser enhancement glasses
- + rubber caps
- + quick charger
- + high-performance rechargeable batteries (NIMH)



### AutoCross-Laser 3C RX

- Set content like above without laser enh. glasses with RangeXtender RX
- + universal mount
- + battery



**Packing dimension** (W x H x D)  
295 x 285 x 243 mm



Stable metal base with vernier adjustment

Illuminated vial for pre-adjustment

High-quality external Quick-Charger

ARTICLE	ARTICLE NO	EAN-CODE	PU
AutoCross-Laser 3C	031.212A	4 021563 668465	1
AutoCross-Laser 3C RX	031.211A	4 021563 667062	1

