

Data sheet for SIMOTICS S-1FK2



Figure similar

MLFB-Ordering data

1FK2206-2AF11-1MA0

Client order no. :

Order no. :

Offer no. :

Remarks :

Item no. :

Consignment no. :

Project :

Basic motor data		Mechanical data	
Motor type	Permanent-magnet synchronous motor, Natural cooling, IP65	Design acc. to Code I	IM B5 (IM V1, IM V3)
Motor type	Compact	Vibration severity grade	Grade A
Static torque	6.50 Nm	Shaft height	63
Static current	5.0 A	Flange size (AB)	125 mm
Maximum torque	18.00 Nm	Centering ring (N)	110 mm
Maximum current	17.8 A	Hole circle (M)	130 mm
Maximum speed	6000 rpm	Screw-on hole (S)	9.0 mm
Rotor moment of inertia	9.400 kgcm ²	Overall length (LB)	205 mm
Weight	7.9 kg	Diameter of shaft (D)	24 mm
		Length of shaft (E)	50 mm
		Length of flange diagonal (P)	158 mm
		Shaft extension	Fitted key

Rated data

SINAMICS S210, 3AC 400V

Rated speed	3000 rpm
Rated torque	5.40 Nm
Rated current	4.4 A
Rated power	1.71 kW

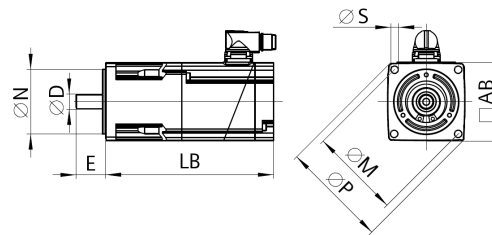


Figure similar

Encoder system

Encoder system	Encoder AM22DQC: Absolute encoder 22 bit + 12 bit multiturn
----------------	---

Motor connection

Connection type	OCC for S210
Connector size	M23



Figure similar

MLFB-Ordering data 1FK2206-2AF11-1MA0

Holding brake	
Holding torque	13.00 Nm
Opening time	70 ms
Closing time	30 ms
Maximum single switching energy ¹⁾	1550.0 J
Service life, operating energy	774000 J
Holding current	0.35 A
Break-induced current for 500 ms ²⁾	1.1 A

¹⁾ Up to three consecutive emergency stops and up to 25% of all emergency stops as a Wmax high energy stop possible.

²⁾ Typcial value for 20°C ambient temperature. At -15°C the break-induced currents can be increased by up to 30%.