



Figure similar

### MLFB-Ordering data

6SL3220-3YE16-0AF0

Client order no. :

Order no. :

Offer no. :

Remarks :

Item no. :

Consignment no. :

Project :

Rated data			General tech. specifications	
<b>Input</b>			<b>Power factor <math>\lambda</math></b>	0.70 ... 0.85
Number of phases	3 AC		<b>Offset factor <math>\cos \varphi</math></b>	0.96
Line voltage	380 ... 480 V +10 % -20 %		<b>Efficiency <math>\eta</math></b>	0.98
Line frequency	47 ... 63 Hz		<b>Sound pressure level (1m)</b>	55 dB
Rated voltage	400V IEC	480V NEC	<b>Power loss</b>	0.080 kW
Rated current (LO)	5.50 A	4.60 A	<b>Filter class (integrated)</b>	RFI suppression filter for Category C2
Rated current (HO)	3.82 A	3.00 A	<b>Ambient conditions</b>	
<b>Output</b>			<b>Cooling</b>	Air cooling using an integrated fan
Number of phases	3 AC		<b>Cooling air requirement</b>	0.005 m³/s (0.177 ft³/s)
Rated voltage	400V IEC	480V NEC	<b>Installation altitude</b>	1000 m (3280.84 ft)
Rated power (LO)	2.20 kW	3.00 hp	<b>Ambient temperature</b>	
Rated power (HO)	1.50 kW	2.00 hp	<b>Operation</b>	-20 ... 45 °C (-4 ... 113 °F)
Rated current (LO)	5.90 A	4.80 A	<b>Transport</b>	-40 ... 70 °C (-40 ... 158 °F)
Rated current (HO)	4.10 A	3.40 A	<b>Storage</b>	-25 ... 55 °C (-13 ... 131 °F)
Rated current (IN)	6.10 A		<b>Relative humidity</b>	
Max. output current	6.40 A		<b>Max. operation</b>	95 % At 40 °C (104 °F), condensation and icing not permissible
Pulse frequency	4 kHz		<b>Closed-loop control techniques</b>	
Output frequency for vector control	0 ... 200 Hz		<b>V/f linear / square-law / parameterizable</b>	Yes
Output frequency for V/f control	0 ... 550 Hz		<b>V/f with flux current control (FCC)</b>	Yes
<b>Overload capability</b>			<b>V/f ECO linear / square-law</b>	Yes
<b>Low Overload (LO)</b>			<b>Sensorless vector control</b>	Yes
110% base load current IL for 60 s in a 300 s cycle time			<b>Vector control, with sensor</b>	No
<b>High Overload (HO)</b>			<b>Encoderless torque control</b>	Yes
150% x base load current IH for 60 s within a 600 s cycle time			<b>Torque control, with encoder</b>	No



Figure similar

### Mechanical data

Degree of protection	IP20 / UL open type
Size	FSA
Net weight	3 kg (7.50 lb)
Width	73 mm (2.87 in)
Height	232 mm (9.13 in)
Depth	209 mm (8.23 in)

### Inputs / outputs

#### Standard digital inputs

Number	6
Switching level: 0→1	11 V
Switching level: 1→0	5 V
Max. inrush current	15 mA

#### Fail-safe digital inputs

Number	1
--------	---

#### Digital outputs

Number as relay changeover contact	2
Output (resistive load)	DC 30 V, 5.0 A
Number as transistor	0

#### Analog / digital inputs

Number	2 (Differential input)
Resolution	10 bit

#### Switching threshold as digital input

0→1	4 V
1→0	1.6 V

#### Analog outputs

Number	1 (Non-isolated output)
--------	-------------------------

#### PTC/ KTY interface

1 motor temperature sensor input, sensors that can be connected: PTC, KTY and Thermo-Click, accuracy ±5 °C
--

### Communication

Communication	PROFINET / EtherNet/IP
---------------	------------------------

### Connections

#### Signal cable

Conductor cross-section	0.15 ... 1.50 mm² (AWG 24 ... AWG 16)
-------------------------	---------------------------------------

#### Line side

Version	screw-type terminal
---------	---------------------

Conductor cross-section	1.50 ... 2.50 mm² (AWG 18 ... AWG 14)
-------------------------	---------------------------------------

#### Motor end

Version	Screw-type terminals
---------	----------------------

Conductor cross-section	1.50 ... 2.50 mm² (AWG 18 ... AWG 14)
-------------------------	---------------------------------------

#### DC link (for braking resistor)

PE connection	On housing with M4 screw
---------------	--------------------------

#### Max. motor cable length

Shielded	200 m (656.17 ft)
Unshielded	300 m (984.25 ft)

### Standards

Compliance with standards	UL, cUL, CE, C-Tick (RCM), EAC, KCC, SEMI F47, REACH
---------------------------	--

CE marking	EMC Directive 2004/108/EC, Low-Voltage Directive 2006/95/EC
------------	---

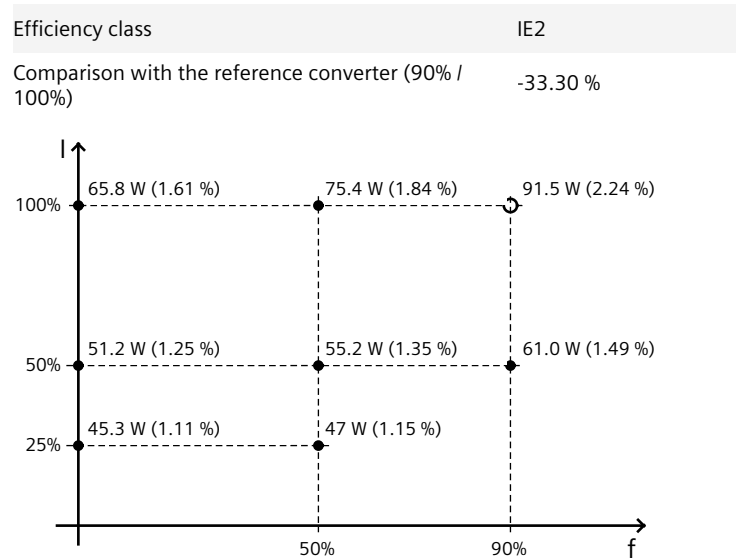


Figure similar

MLFB-Ordering data

6SL3220-3YE16-0AF0

Converter losses to EN 50598-2\*



The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard EN 50598) of the relative torque generating current (I) over the relative motor stator frequency(f). The values are valid for the basic version of the converter without options/components.

\*converted values

Operator panel: Intelligent Operator Panel (IOP-2)

Screen	Ambient conditions																
<table><tr><td>Display design</td><td>LCD colors</td></tr><tr><td>Screen resolution</td><td>320 x 240 Pixel</td></tr></table>	Display design	LCD colors	Screen resolution	320 x 240 Pixel	<table><tr><td colspan="2">Ambient temperature during</td></tr><tr><td>Operation</td><td>0 ... 50 °C (32 ... 122 °F) 55 °C only with door mounting kit</td></tr><tr><td>Storage</td><td>-40 ... 70 °C (-40 ... 158 °F)</td></tr><tr><td>Transport</td><td>-40 ... 70 °C (-40 ... 158 °F)</td></tr><tr><td colspan="2">Relative humidity at 25°C during</td></tr><tr><td>Max. operation</td><td>95 %</td></tr></table>	Ambient temperature during		Operation	0 ... 50 °C (32 ... 122 °F) 55 °C only with door mounting kit	Storage	-40 ... 70 °C (-40 ... 158 °F)	Transport	-40 ... 70 °C (-40 ... 158 °F)	Relative humidity at 25°C during		Max. operation	95 %
Display design	LCD colors																
Screen resolution	320 x 240 Pixel																
Ambient temperature during																	
Operation	0 ... 50 °C (32 ... 122 °F) 55 °C only with door mounting kit																
Storage	-40 ... 70 °C (-40 ... 158 °F)																
Transport	-40 ... 70 °C (-40 ... 158 °F)																
Relative humidity at 25°C during																	
Max. operation	95 %																
Mechanical data																	
<table><tr><td>Degree of protection</td><td>IP55 / UL type 12</td></tr><tr><td>Net weight</td><td>0.13 kg (0.30 lb)</td></tr><tr><td>Width</td><td>70.0 mm (2.76 in)</td></tr><tr><td>Height</td><td>106.85 mm (4.21 in)</td></tr><tr><td>Depth</td><td>19.65 mm (0.77 in)</td></tr></table>	Degree of protection	IP55 / UL type 12	Net weight	0.13 kg (0.30 lb)	Width	70.0 mm (2.76 in)	Height	106.85 mm (4.21 in)	Depth	19.65 mm (0.77 in)	<table><tr><td colspan="2">Approvals</td></tr><tr><td>Certificate of suitability</td><td>CE, cULus, EAC, KCC, RCM</td></tr></table>	Approvals		Certificate of suitability	CE, cULus, EAC, KCC, RCM		
Degree of protection	IP55 / UL type 12																
Net weight	0.13 kg (0.30 lb)																
Width	70.0 mm (2.76 in)																
Height	106.85 mm (4.21 in)																
Depth	19.65 mm (0.77 in)																
Approvals																	
Certificate of suitability	CE, cULus, EAC, KCC, RCM																