

DURA ECO LA-BAT 24V 12AH**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

The Weidmüller battery modules consist of high-quality Panasonic batteries. These are sealed, maintenance-free lead-fleece batteries. The battery modules are fitted with a temperature sensor to provide optimum battery charging and battery life. This facilitates temperature-compensated charging of the batteries.

The neat design as well as the plug-in connections for the battery connection and the temperature sensor allow the batteries to be fitted safely and quickly.

General ordering data

Version	Battery
Order No.	2789920000
Type	DURA ECO LA-BAT 24V 12AH
GTIN (EAN)	4064675068679
Qty.	1 pc(s).

DURA ECO LA-BAT 24V 12AH**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Dimensions and weights**

Depth	135 mm	Depth (inches)	5.315 inch
Height	158 mm	Height (inches)	6.22 inch
Width	229 mm	Width (inches)	9.016 inch
Net weight	9,700 g		

Temperatures

Storage temperature	-20 °C...60 °C	Humidity	5...95 % RH
---------------------	----------------	----------	-------------

Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

Operating interfaces and control inputs

Temperature probe	NTC 100 kΩ
-------------------	------------

Input

Charging current, max.	1.8 A	Nominal capacity	12 Ah
Rated input voltage	24 V DC		

Output

Output current, max.	50 A	Overload and short circuit protection	2x25 A fuse
Parallel connection option	Yes	Temperature probe	NTC 100 kΩ

General data

Ambient temperature	Charge: -15...+50°C, Discharge: -20...+60°C	Humidity	5...95 % RH
Life expectancy	5.65 year	Shock wall acc. to IEC 68227	30 g
Vibration DIN rail/wall in accordance with IEC 68-2-6	- / 0.7 g		

Insulation coordination

Protection class	III, with no ground connection, for SELV
------------------	--

Connection data (input)

Conductor cross-section, AWG/kcmil , max.	6	Conductor cross-section, AWG/kcmil , min.	24
Conductor cross-section, flexible , min.	0.5 mm ²	Conductor cross-section, rigid , max.	16 mm ²
Conductor cross-section, rigid , min.	0.5 mm ²	Wire connection cross section, flexible (input), max.	10 mm ²

Connection data (signal)

Number of terminals	2	Wire connection method	Pluggable screw connection
Wire cross-section, AWG/kcmil , max.	16	Wire cross-section, AWG/kcmil , min.	24
Wire cross-section, solid , max.	1.5 mm ²	Wire cross-section, solid , min.	0.2 mm ²

DURA ECO LA-BAT 24V 12AH**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Approvals**

Certificate no. (cULus)	E258476	Institute (cULus)	CULUS
-------------------------	---------	-------------------	-------

Classifications

ETIM 6.0	EC002850	ETIM 7.0	EC002850
ETIM 8.0	EC002850	ECLASS 9.0	27-04-06-92
ECLASS 9.1	27-04-92-01	ECLASS 10.0	27-04-06-92
ECLASS 11.0	27-04-06-92	ECLASS 12.0	27-04-06-92

Approvals

Approvals



ROHS	Conform
UL File Number Search	E258476

Downloads


Approval/Certificate/Document of Conformity	Declaration of Conformity
Engineering Data	CAD data – STEP
Engineering Data	EPLAN
User Documentation	Instruction sheets

DURA ECO LA-BAT 24V 12AH

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings

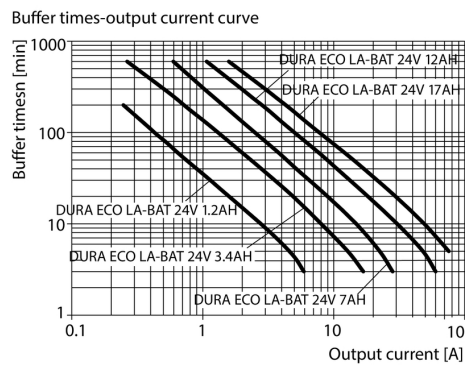

Buffer Time