

for safety lighting circuits,
for equipotential bonding conductors



DK 0404 R

- 1.5-4 mm², Cu 3~


IP
66

- terminal with 2 clamping units per pole
- 5-pole per pole 8 x 1,5 mm² sol / f, 6 x 2,5 mm² sol / f, 4 x 4 mm² sol / f, 2 x 6 mm² sol / f
- with red lid RAL 3000
- for safety lighting circuits,
for equipotential bonding conductors
- with elastic membranes, which can be removed for cable entry via cable glands, sealing range 9.0-17.0 mm
- with one cable entry in the bottom, sealing range Ø 6.0-15.0 mm
- lid fasteners sealable without accessories
- retaining strap and external brackets for wall fixing included
- Colour: grey, RAL 7035

rated insulation voltage	U _i = 690 V a.c./d.c.
rated current:	32 A
tightening torque for terminal	0.7 Nm
material	PP (polypropylene)
degree of protection:	IP 66
width	104 mm
height	104 mm
depth	70 mm
weight	0,161 kg
in accordance with	IEC 60670-22

Drawings

Dimension drawing

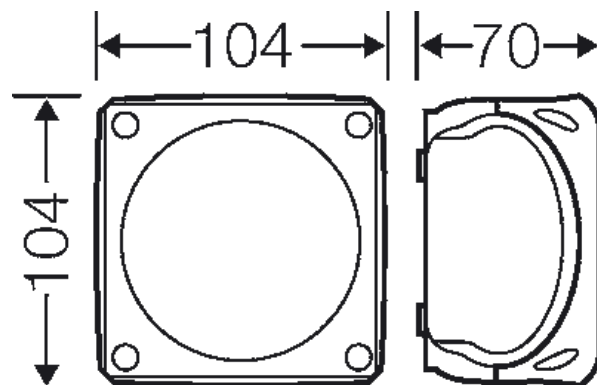

for safety lighting circuits,
for equipotential bonding conductors




DK 0404 R


- 1.5-4 mm², Cu 3~

IP
66

Detail mass

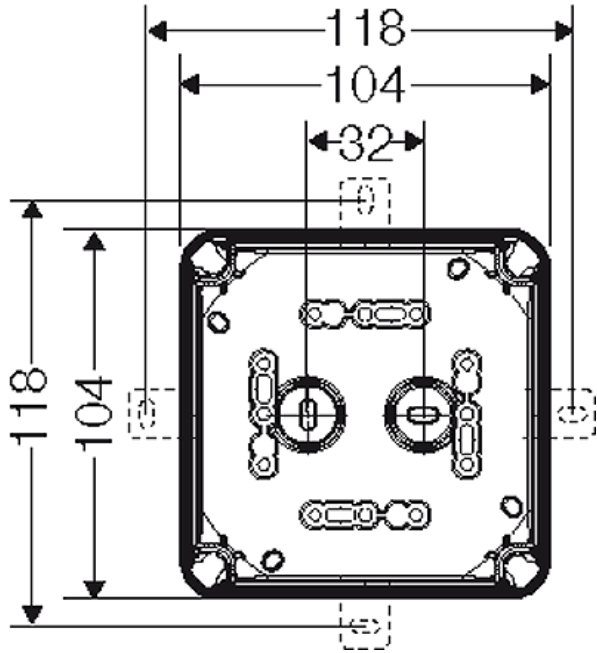

Box walls

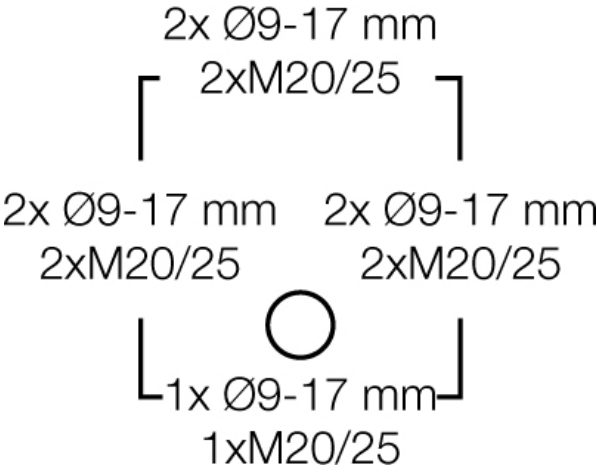

Operating and ambient conditions

Application area	Suitable for indoor installation and outdoor installation, protected against weather influences
Ambient temperature	Average value over 24 hours + 35 °C Maximum value + 40 °C Minimum value - 25 °C
Relative humidity	50% at 40° C short-time 100% at 25° C
Fire protection in the event of internal faults	Demands placed on electrical devices from standards and laws Minimum requirements - Glow wire test in accordance with IEC 60695-2-11: - 650°C for boxes and cable glands - 850°C for parts of insulating material necessary to retain current carrying parts in position

for safety lighting circuits,
for equipotential bonding conductors



DK 0404 R

- 1.5-4 mm², Cu 3~

IP

66

Burning behaviour	Glow wire test IEC 60695-2-11: 750 °C UL Subject 94: V-2 flame-retardant self-extinguishing
Degree of protection against mechanical load	IK07 (2 Joule)
Toxic behaviour	halogen-free silicone-free "halogen-free" in accordance with the examination of the cables and insulated wires - corrosiveness of fumes - as per IEC 60 754-2
Note:	For material properties see technical data.