

U.I. Lapp GmbH	PRODUCT INFORMATION	
	UNITRONIC® BUS ASI FD	12.09.2012

Highly flexible application

The new BUS ASI LD 2 x 2.5 (Long Distance) allows even modules located further away to be connected. AS-I power supplies can be reduced. The BUS ASI LD is downwards-compatible with version 1.5.

For highly flexible applications (power chains, moving machine parts)

High oil-resistance

LAPP KABEL STUTTGART UNITRONIC® BUS ASI FD

LAPP KABEL STUTTGART UNITRONIC® BUS ASI FD



Info

"FD" = suitable for power chains

"LD" = Long Distance

Application range

Communication at sensor/actuator level

UNITRONIC® Fieldbus sensor-/actuator wiring

Design

Extra-fine wire, tinned copper strands

Core insulation: blue and brown

Profiled outer sheath: TPE or PUR

Colour: yellow (RAL 1023) or black (RAL 9005)

Approvals (Norm references)

ASI is standardised Europe-wide in EN 50295 and internationally in IEC 62026-2.

TPE variant: UL AWM Style 2103 CSA AWM II A/B

PUR versions: UL AWM Style 20549

Product features

PUR versions are halogen-free according to IEC 60754-1

Flame-retardant according to IEC 60332-1-2, UL FT-2 flame test

Data and power are transmitted via an unscreened, geometrically coded two-core flat cable (protection against polarity reversal).

The conductor is contacted by "piercing technology" within the ASI modules.

The sensors are connected to the ASI modules (coupling modules) using round cables (connection cables).

Remark

Unless specified otherwise, the shown product values are nominal values. Detailed values (e.g. tolerances) are available upon request.

Copper price basis: EUR 150/100kg. Refer to Appendix T17 for the definition and calculation of copper-related surcharges.

Please find our standard lengths at: www.lappkabel.de/en/cable-standardlengths

Lapp Kabel is a member of the AS-International Association

Photographs are not to scale and do not represent detailed images of the respective products.

Product Management	Document: LAPP_PRO147967EN.pdf	1 / 4
--------------------	--------------------------------	-------

U.I. Lapp GmbH	PRODUCT INFORMATION	 LAPP GROUP
	UNITRONIC® BUS ASI FD	12.09.2012


Technical Data

Peak operating voltage:	300 V (not for power applications)
Conductor resistance:	1.5 mm ² : max. 13.7 Ohm/km 2.5 mm ² : max. 8.21 Ohm/km
Minimum bending radius:	Fixed installation: 12 mm Flexing without fixing: 24 mm Flexing with fixing: 60 mm (15 x D)
Test voltage:	Core/core: 2000 V
Temperature range:	Fixed installation: -40 °C to +80 °C (TPE +105 °C) Flexing – without fixing: -30 °C to +70 °C (TPE +105 °C)

Product Management	Document: LAPP_PRO147967EN.pdf	2 / 4
--------------------	--------------------------------	-------

Part number	Article designation	Outer sheath material	Outer sheath colour	Application	Number of cores and mm² per conductor	Copper index (kg/km)	Weight (kg/km)
For highly flexible applications (power chains, moving machine parts)							
2170357	UNITRONIC® BUS ASI FD P FRNC	PUR UL/CSA (AWM)	yellow	Data and power transmission	2 x 1,5	29.0	64
2170358	UNITRONIC® BUS ASI FD P FRNC	PUR UL/CSA (AWM)	black	Transmission of 30 V DC auxiliary power	2 x 1,5	29.0	64
2170317	UNITRONIC® BUS ASI LD FD P	PUR UL/CSA (AWM)	yellow	Data and power transmission	2 x 2,5	48.0	74
2170318	UNITRONIC® BUS ASI LD FD P	PUR UL/CSA (AWM)	black	Transmission of 30 V DC auxiliary power	2 x 2,5	48.0	74
2170830	UNITRONIC® BUS ASI FD (TPE) A	TPE UL/CSA (AWM)	yellow	Data and power transmission	2 x 1,5	29.0	64
2170831	UNITRONIC® BUS ASI FD (TPE) A	TPE UL/CSA (AWM)	black	Transmission of 30 V DC auxiliary power	2 x 1,5	29.0	64

U.I. Lapp GmbH	PRODUCT INFORMATION	 LAPP GROUP
	UNITRONIC® BUS ASI FD	12.09.2012

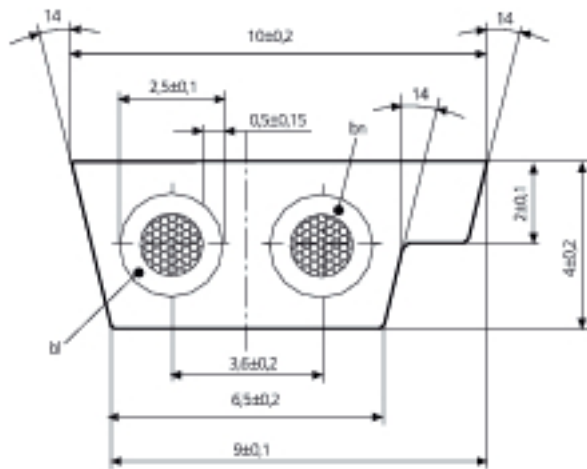

Product Management	Document: LAPP_PRO147967EN.pdf	4 / 4
--------------------	--------------------------------	-------