


Datablad (2016-08-02)

CC-bøjler – 40 mm

Til montering af rør med isolering af elastomer på væggen eller loftet for at forhindre varmetab.

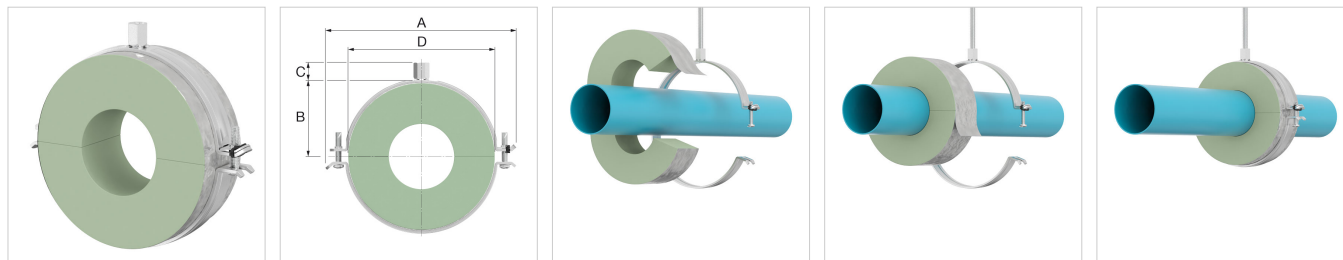

Type	Ø Rør		Maks. vertikale driftsbelastning [N]	Båndmål [mm]	Dimensioner					Best. nr.
	[mm]	Nom. [°]			A [mm]	B [mm]	C [mm]	D [mm]		
CC 40 x 15	15		100	20 x 2,0	134	49	15	95	10	39850
CC 40 x 18 - 3/8	18	3/8	125	20 x 2,0	140	52	15	97	10	39851
CC 40 x 22 - 1/2	22	1/2	150	20 x 2,0	140	52	15	101	60	39852
CC 40 x 28 - 3/4	28	3/4	175	20 x 2,0	155	60	15	107	10	39853
CC 40 x 35 - 1	35	1	200	20 x 2,0	155	60	15	114	10	39854
CC 40 x 42 - 1 1/4	42	1 1/4	250	20 x 2,0	165	65	15	122	10	39855
CC 40 x 48 - 1 1/2	48	1 1/2	300	20 x 2,5	167	66	15	128	10	39856
CC 40 x 54	54		350	20 x 2,5	177	70	15	134	10	39857
CC 40 x 57	57		375	20 x 2,5	177	70	15	137	10	39858
CC 40 x 60 - 2	60	2	400	20 x 2,5	177	70	15	140	10	39859
CC 40 x 70	70		450	20 x 2,5	192	77	15	150	10	39860
CC 40 x 76 - 2 1/2	76	2 1/2	500	20 x 2,5	205	84	15	156	10	39861
CC 40 x 89 - 3	89	3	600	20 x 2,5	211	87	15	169	10	39862
CC 40 x 108	108		700	20 x 2,5	229	96	15	188	10	39863
CC 40 x 114 - 4	114	4	750	20 x 2,5	245	104	15	194	10	39864
CC 40 x 133	133		775	20 x 3,0	255	108	15	213	10	39865
CC 40 x 140 - 5	140	5	800	20 x 3,0	272	117	15	220	10	39866

Fordele

- Isoleringholder bredere end bøjlen, hvilket gør det lettere at tape den til rørets isolering.

Generel Information

- Bøjle: El-forzinket.
- Isolering: 40 mm hård PIR-isolering, belagt med aluminiumsfolie.
- Forbindelse: M8/M10.
- Isoleringsbredde: 50 mm.
- Temperaturbestandighed: - 200 °C op til + 120 °C.

- Termisk ledningsevne: maksimal 0,029 W/(m.K).
- Relativ dampmodstand: 30.000 μ .



Find flere oplysninger online:

[CAD-tegninger](#)

[Teknisk dokumentation](#)

Flamco Danmark
Tonsbakken 16-18
DK-2740, Skovlunde - Danmark
T 449 402 07
E info@flamco.dk
I www.flamcogroup.com