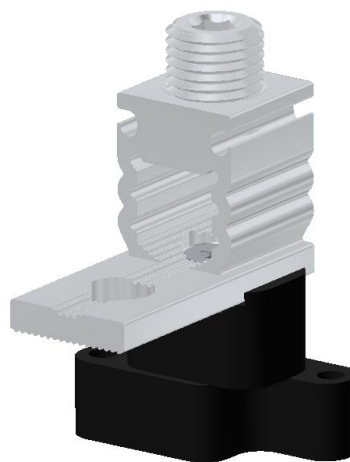


Product data


Product code	VC04-0003	STK-code	5202432	EAN-code	6410052024321
Product name	Insulated Universal connector 1xAl/Cu 6-95mm ²				
Wires	1xAl/Cu 6-95mm ²				

Technical data

Nominal current	Cu	245	A
	Al	220	A
Nominal voltage		690	V
Max. Current (US)	Cu	-	A
	Al	-	A
Max. Voltage (US)		-	V
Number of pole		1	pcs
Max. Cross section		95	mm ²
Tightening torque	6-35 mm ²	10	Nm
	50-95 mm ²	22	Nm
	-	-	Nm
	-	-	Nm
Max. Operating temperature		80	°C
Weight		40	g
IP-protection		-	
Standards	EN 61238-1:2003		
Color/ Material	Tin plated aluminium/ Black PA66		
Mounting/ Connection	Screw M4		


Description

OTE-connectors are designed to be used connecting aluminium and copper conductors to equipment.

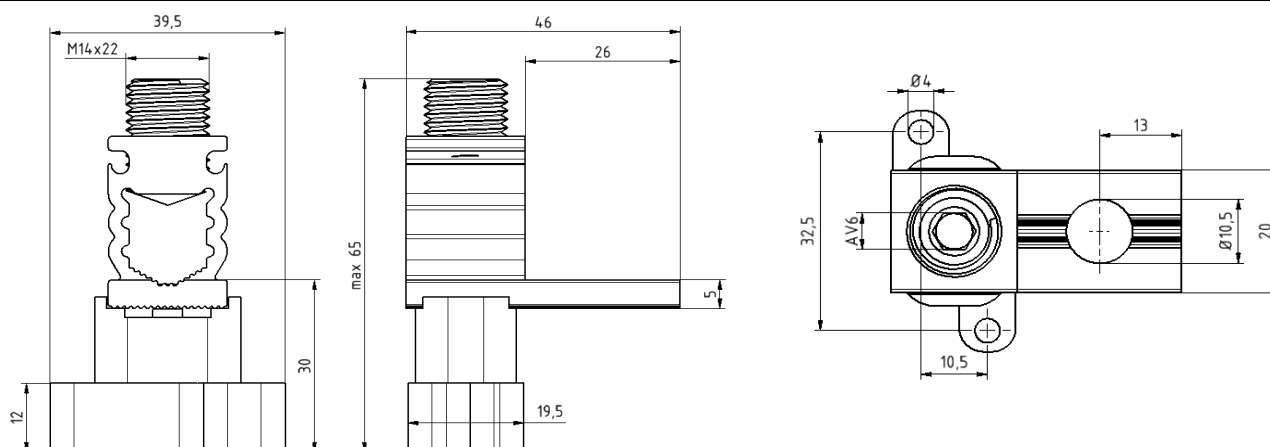Drawing

Package

Package	Box	pcs/ package	30	Weight [Kg]	1,08
Length [mm]	210	Width [mm]	155	Height [mm]	105