

Data sheet for SIMOTICS S-1FK2



Figure similar

MLFB-Ordering data

1FK2102-1AG10-0MA0

Client order no. :

Order no. :

Offer no. :

Remarks :

Item no. :

Consignment no. :

Project :

Basic motor data		Mechanical data	
Motor type	Permanent-magnet synchronous motor, Natural cooling, IP64	Design acc. to Code I	IM B5 (IM V1, IM V3)
Motor type	High Dynamic	Vibration severity grade	Grade A
Static torque	0.32 Nm	Shaft height	20
Static current	0.8 A	Flange size (AB)	40 mm
Maximum torque	1.11 Nm	Centering ring (N)	30 mm
Maximum current	3.0 A	Hole circle (M)	46 mm
Maximum speed	8000 rpm	Screw-on hole (S)	4.5 mm
Rotor moment of inertia	0.040 kgcm ²	Overall length (LB)	137 mm
Weight	0.9 kg	Diameter of shaft (D)	8 mm
		Length of shaft (E)	25 mm
		Length of flange diagonal (P)	54 mm
		Shaft extension	Plain shaft

Rated data

SINAMICS S210, 1AC 230V

Rated speed	3000 rpm
Rated torque	0.32 Nm
Rated current	0.8 A
Rated power	0.10 kW

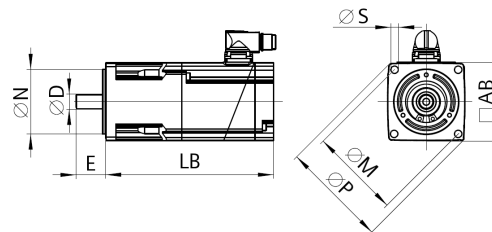


Figure similar

Encoder system

Encoder system	Encoder AM22DQC: Absolute encoder 22 bit + 12 bit multiturn
----------------	---

Motor connection

Connection type	OCC for S210
Connector size	M12

1FK2102-1AG10-0MA0

Holding torque	0.32 Nm
Opening time	25 ms
Closing time	8 ms
Maximum single switching energy ¹⁾	7.4 J
Service life, operating energy	1750 J
Holding current	0.1 A
Break-induced current for 500 ms ²⁾	0.6 A

²⁾ Typical value for 20°C ambient temperature. At -15°C the break-induced currents can be increased by up to 30%.