



**Electrical performance:**CEI EN 50393
as applicable**Gel:** UL 94-HB **Halogen free:**

according to CEI EN 50267 2-2

**Self-extinguishing and
resistant to abnormal
heat and fire:**Glow wire test a +960°C
according to EN 60695-2-11Operating
temperature Gel operating temperature:
-60°C / +200°C **IP69K**
OFFICIALLY
TESTED**IP68**
OFFICIALLY
TESTED**IMQ**

Fox Box IP68

The 5 entrances jointing box with perimeter chamber pre-filled with gel to give the product the maximum lightness and capacity.

Kit includes accessories that maximise versatility and allow use with cables from 6 to 18 mm in diameter and with 16, 20 and 32 mm diameter cable conduits. The internal, gel-free compartment facilitates connection and any future disconnection with conductors. The gel, contained in the annular chamber of the box also contains, insulates and seals any armour continuity connections or shields.


- Functional, elegant design
- Ideal for exposed and safety systems and for video camera installation
- Ready for use
- Click and hook closure, does not require screws
- Ready and installable in all environmental conditions
- Also suitable for wet or flooded environments
- No shelf life
- Always re-enterable
- Wall or external ceiling fixing system
- Halogen free & UV resistant

Safe, fast, elegant, lightweight and versatile!


**PATENT PENDING**



Cutting the membrane (bottom and cover).

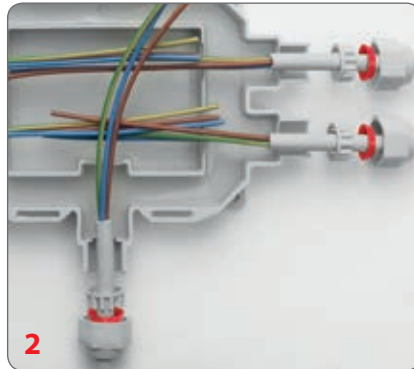

Gland and adapter pre-threading and cable positioning.

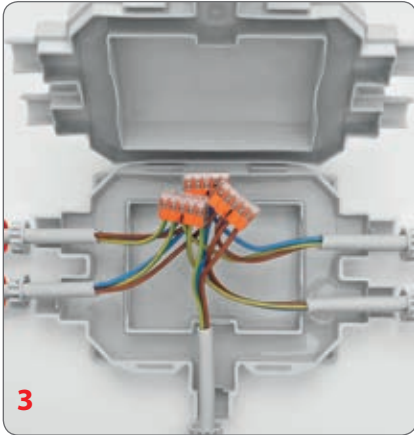

Conductor connection.



Nut closing and tightening.



On wall with cables



On wall with 3 conduit diameters

Revolutionary!

Cable sheath, armour and shield storage compartment

Gel-free connection storage compartment

Screwless click hook closure

Adapters

Easy breakaway membrane

Chamber pre-filled with insulating and sealing gel

Can be mounted on walls or ceilings

Box with 5 entrances for cables and conduits



Product	Colour	N° of entrances	Ø entrances with cable glands		Ø tubes (mm)	A x B x C (mm)
FOX BOX	●	5	min (mm)	max (mm)		
FOX BOX - N	●		6	18	16 / 20 / 32	210 x 155 x 45
FOX BOX - ARM	●					

Ø CABLES from 6 to 18 mm
Ø CONDUITS 16 - 20 - 32 mm