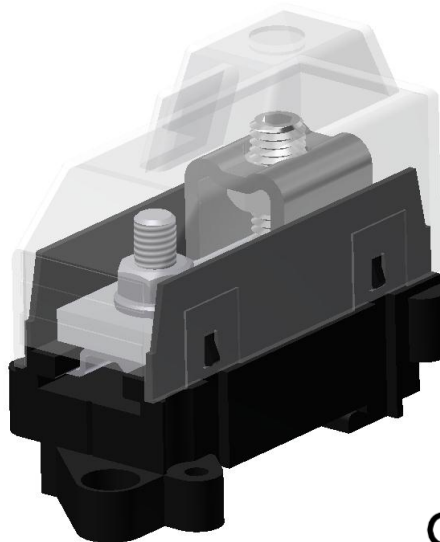


Product data


Product code	VC03-0001	STK-code	1914140	EAN-code	6410019141405
Product name	OLE 25-95				
Wires	1xAl/Cu 25-95 mm²				

Technical data

Nominal current	Cu	320	A
	Al	320	A
Nominal voltage		690	V
Max. Current (US)	Cu	-	A
	Al	-	A
Max. Voltage (US)		-	V
Number of pole		1	
Max. Cross section		95	mm ²
Tightening torque	25-95 mm ²	20	Nm
Max. Operating temperature		80	°C
Weight		119	g
IP-protection		IP20	
Standards	-		
Color/ Material	Connector Stainless steel/ Tin plated copper; Housing PP66/ PC		
Mounting/ Connection	DIN-rail or screw		


Description

OLE-connectors are housing equipped OL-connectors. They are designed to be used connecting aluminium and copper conductors. Frames are made of stainless steel and busbars are tin-plated copper. OLE-connectors can be mounted side by side with screws to each other.

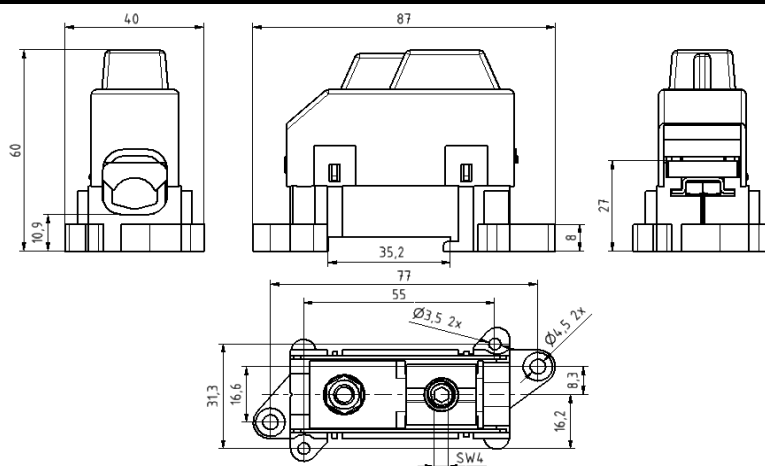Drawing

Package

Package	Box	pcs/ package	12	Weight [Kg]	1,52
Length [mm]	210	Width [mm]	155	Height [mm]	105