



BEM: det er den korrekte skrueplacering der er vist.





Ledningerne skal ligges stramt og føres igennem hullerne, så de ikke laver skygger i opalen.

Material:	DSM Netto 55W 3000K CD Opal afskærmning WHI/25 7450lm		Scale:	Papersize:
Author / Date:			Changes/Init./Date:	A3
Tolerance general:			Changes/Init./Date:	
Previous drawing:			Drawingnumber	Version
Variant of:			8246087562	0

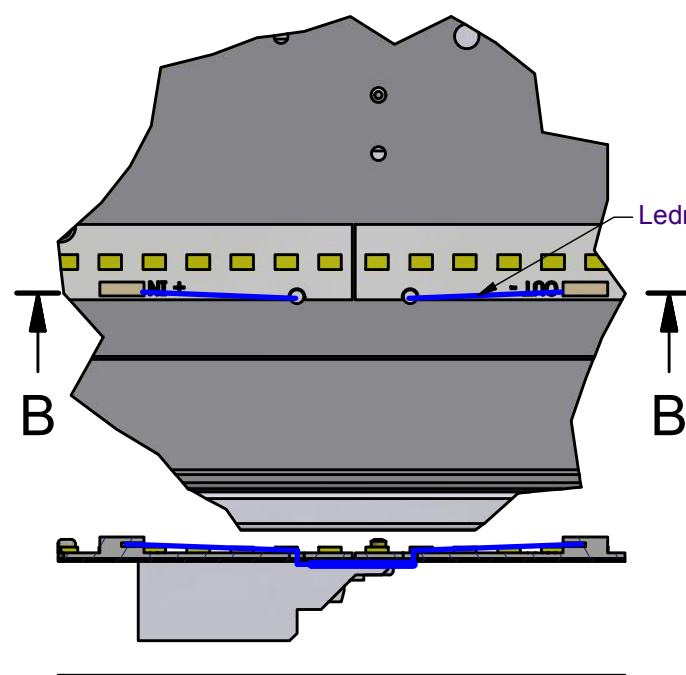

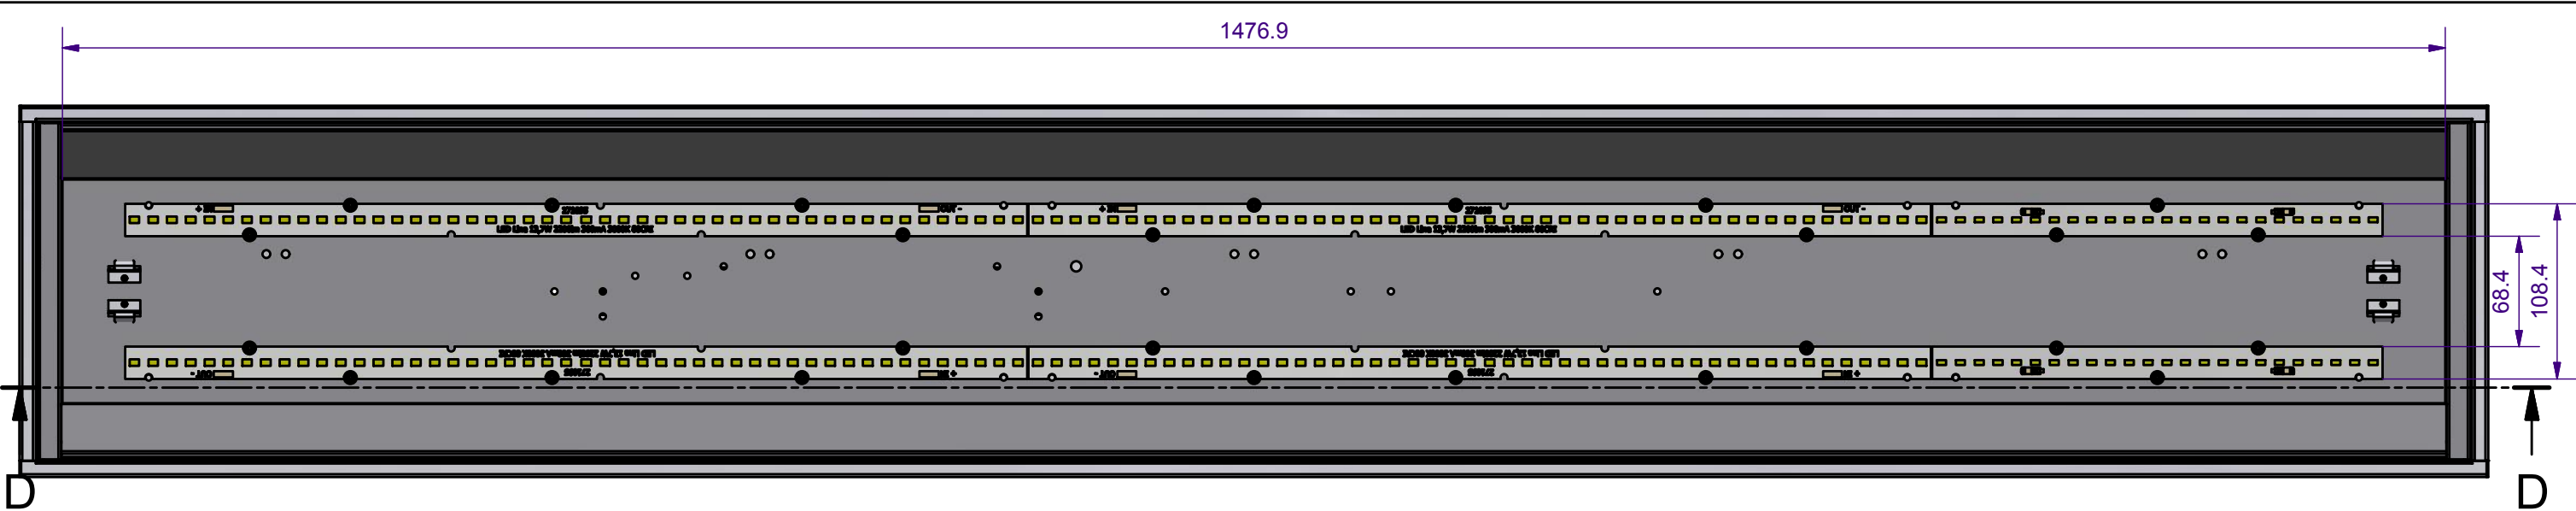

D-D (1 : 4)

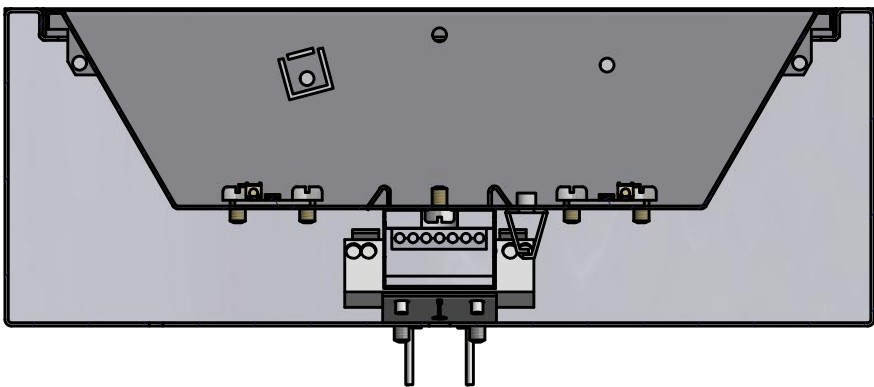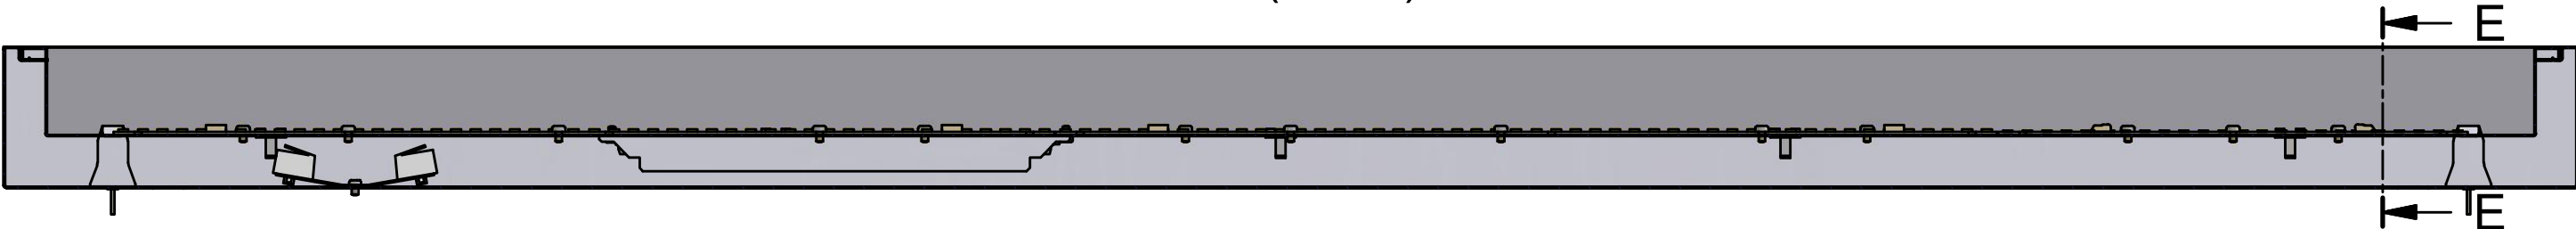

Material:	DSM Netto 55W 3000K CD Opal afskærmning WHI/25 7450lm	Scale:	Papersize:
Author / Date:		Changes/Init./Date:	A3
msc 27-04-2015		Changes/Init./Date:	
Tolerance general:		Drawingnumber	Version
Previous drawing:		8246087562	0
Variant of:			

